

Supplemental Motor Protection Devices

- Bulletin 809S/813S/814S/817S MachineAlert™ Dedicated Function Motor Protection Relays.....**Page 3-2**
- Bulletin 1409 Arcing Ground Fault Detection System: Adjustable Trip from 1...6 A.....**Page 3-15**
- Bulletin 1410 Motor Winding Heater: Automatic Operation, Solid-State Design.....**Page 3-19**

Next Generation Dedicated Function Motor Protection Relays

Product Overview/Cat. No. Explanation



MachineAlert Relays

The MachineAlert family of dedicated function motor protection relays offers state-of-the-art supplementary protective functions that are easily added and applied to your motor control circuits. This full range of products allows selective addition of motor protective enhancing functions to meet your specific application requirements for supplemental voltage-, current-, thermistor-, power-, and power factor-based protection. Additionally, MachineAlert relays are your economical choice for protecting equipment investments and minimizing production downtime.

Table of Contents

Cat. No. Explanation this page
 Product Selection 3-4
 Specifications..... 3-4
 Approximate Dimensions..... 3-14

Standards Compliance

EN 60664, EN 60038
 UL 508

Certifications

cULus Listed (File E14840, Guide NKCR, NKCR7)

Enhanced Protection

- Voltage monitoring relay
 - Guards against the damaging effects of phase loss, under- and overvoltage, phase imbalance, phase reversal, and voltage quality of incoming power line
- Current monitoring relay
 - Provides under- and overcurrent detection
- Thermistor monitoring relay
 - Protects equipment from overtemperature conditions
- Power (kW) monitoring relay
 - Monitors for under- and over active power, as well as power direction
- Power factor (PF) monitoring relay
 - Monitors for under- and over power factor detection

Typical Applications

- Blowers
- Conveyors
- Compressors
- Cutting and Drilling Machines
- Fans
- Mixers
- Pumps
- VFD-Controlled Motors

Cat. No. Explanation

Examples given in this section are for reference purposes. This basic explanation should not be used for product selection; not all combinations will produce a valid catalog number.

809S – C1 – 10A – 48

a b c d

a

Bulletin Number	
Code	Description
809S	Current Monitoring Relay
813S	Voltage Monitoring Relay
814S	Power Monitoring Relay
817S	Thermistor Monitoring Relay

b

Type	
Bulletin 809S	
Code	Description
C1	Single-Phase Current Monitoring Relay
Bulletin 813S	
V1	Single-Phase Voltage Monitoring Relay
V3	Three-Phase Voltage Monitoring Relay
Bulletin 814S	
W3	Three-Phase Power (kW) Monitoring Relay
PF3	Three-Phase Power Factor Monitoring Relay
Bulletin 817S	
PTC	Thermistor Monitoring Relay

c

Measurement Rating	
Bulletin 809S	
Code	Description
10A	1...10 A AC/DC
Bulletin 813S	
500V	2...500V AC/DC (Type V1)
110V	110...115V AC (Type V3)
230V	208...240V AC (Type V3)
400V	380...415V AC (Type V3)
480V	440...480V AC (Type V3)
690V	600...690V AC (Type V3)
Bulletin 814S	
480V-10A	380...480V AC & 1...10 A AC
690V-10A	600...690V AC & 1...10 A AC
Bulletin 817S	
—	—





d

External Power Code	
Bulletin 809S	
Code	Description
48	24/48V AC/DC
230	115/230V AC
Bulletin 813S	
48	24/48V AC/DC (Type V1 only)
230	115/230V AC (Type V1 only)
Bulletin 814S	
—	—
Bulletin 817S	
48	24/48V AC/DC
115	115V AC
230	230V AC

Next Generation Dedicated Function Motor Protection Relays

Product Overview





Product Overview

	Bulletin 809S Current Monitoring Relay	Bulletin 813S Voltage Relay		Bulletin 814S Power Factor Relay	Bulletin 814S Power (kW) Relay	Bulletin 817S Thermistor Relay
						
Type	Single-Phase	Single-Phase	Three-Phase	Three-Phase	Three-Phase	—
Operating range	1...10A AC/DC	2...500V AC/DC	110...115V AC 208...240V AC	1...10 A AC	1...10 A AC	24/48V AC/DC
	24/48V AC/DC	24/48V AC/DC	380...415V AC 440...480V AC	380...480V AC	380...480V AC	115V AC
	115/230V AC	115/230V AC	600...690V AC	600...690V AC	600...690V AC	230V AC
Under- and overcurrent protection	✓	—	—	—	—	—
Under- and overvoltage protection	—	✓	✓	—	—	—
Phase loss protection	—	—	✓	—	—	—
Phase imbalance	—	—	✓	—	—	—
Phase reversal	—	—	✓	—	—	—
Minimum and maximum cos (θ) protection	—	—	—	✓	—	—
Under- and over active power (kW) protection	—	—	—	—	✓	—
Overtemperature protection	—	—	—	—	—	✓
Adjustable time delay settings	✓	✓	✓	✓	✓	—
Programmable latching or inhibit at set level	✓	✓	—	✓	✓	—
Changeover Contacts (SPDT)	1	1	2	1	1	1
Automatic Reset	✓	✓	✓	✓	✓	—
LED status indicator	✓	✓	✓	✓	✓	✓
Dimensions (W x H x D)	22.5 x 80 x 99.5 mm	22.5 x 80 x 99.5 mm	45 x 80 x 99.5 mm	45 x 80 x 99.5 mm	45 x 80 x 99.5 mm	22.5 x 80 x 99.5 mm

Next Generation Dedicated Function Motor Protection Relays

Product Selection/Specifications

Product Selection

Motor Protection Relay Type	Description	Cat. No.
	1...10 A AC/DC (1-phase); 24/48V AC/DC control power	809S-C1-10A-48
	1...10 A AC/DC (1-phase); 115/230V AC control power	809S-C1-10A-230
	Single-phase voltage monitoring relay, 2...500V AC/DC; 24/48V AC/DC control power	813S-V1-500V-48
	Single-phase voltage monitoring relay, 2...500V AC/DC; 115/230V AC control power	813S-V1-500V-230
	Three-phase voltage monitoring relay, 110...115V AC	813S-V3-110V
	Three-phase voltage monitoring relay, 208...240V AC	813S-V3-230V
	Three-phase voltage monitoring relay, 380...415V AC	813S-V3-400V
	Three-phase voltage monitoring relay, 440...480V AC	813S-V3-480V
	Three-phase power (kW) monitoring relay, 380...480V AC & 1...10 A AC	814S-W3-480V-10A
	Three-phase power (kW) monitoring relay, 600...690V AC & 1...10 A AC	814S-W3-690V-10A
	Three-phase power factor monitoring relay, 380...480V AC & 1...10 A AC	814S-PF3-480V-10A
	Three-phase power factor monitoring relay, 600...690V AC & 1...10 A AC	814S-PF3-690V-10A
	Thermistor monitoring relay, 24/48V AC/DC control power	817S-PTC-48
	Thermistor monitoring relay, 115V AC control power	817S-PTC-115
	Thermistor monitoring relay, 230V AC control power	817S-PTC-230

Current Transformers

Use only with **Cat No. 809S-C1**.

Trip Current Range Continuous AC Amperes (5 A Secondary Winding)	Maximum Current [A]		Cat. No.
	Continuous	Inrush	
4.2...50	75	350	809S-CT1
17...200	300	1400	809S-CT2
42...500	750	3500	809S-CT3
100...1200	1800	8400	809S-CT4

Specifications

Bulletin 809S Current Monitoring Relay, Single-Phase

Cat. No.	809S-C1-10A-48	809S-C1-10A-230
Input Specifications		
Measuring Range	1...10 A AC/DC	1...10 A AC/DC
Internal Resistance	3 mΩ	3 mΩ
Maximum for 1 Second	50 A	50 A
Contact Input		
Disabled	Terminals Z1, Y1	Terminals Z1, Y1
Enabled	>10 kΩ	>10 kΩ
Latch Disable	<500 Ω	<500 Ω
	>500 ms	>500 ms
Output Specifications		
Type of Contact	(1) Form C	(1) Form C
Rated Insulation Voltage	250V AC	250V AC
Supply Specifications		
Rated Operational Voltage	Terminals A1, A2 or A3, A2	Terminals A1, A2 or A3, A2
	24...48V AC/DC +/- 15%	115/230V AC +/- 15%
	45 to 65 Hz, Insulated	45 to 65 Hz, Insulated
Rated Operational Power	4 VA, 3 W	4 VA, 3 W
General Specifications		
Power ON Delay	1 s +/- 0.5 s or 6 s +/- 0.5 s	1 s +/- 0.5 s or 6 s +/- 0.5 s
Environment		
Degree of Protection	IP 20	IP 20
Pollution Degree	3	3
Dimensions (W x H x D)	22.5 x 80 x 99.5 mm	22.5 x 80 x 99.5 mm
Screw Terminals	Max. 0.5 N•m	Max. 0.5 N•m

Next Generation Dedicated Function Motor Protection Relays

Specifications

Bulletin 813S Voltage Relay, Single-Phase

Cat. No.	813S-V1-500V-48	813S-V1-500V-230
Input Specifications		
Measuring Range	2...500 V AC/DC	2...500 V AC/DC
Internal Resistance	500 kΩ	500 kΩ
Maximum for 1 Second	1000 V	1000 V
Contact Input		
	Terminals Z1, Y1	Terminals Z1, Y1
Disabled	>10 kΩ	>10 kΩ
Enabled	<500 Ω	<500 Ω
Latch Disable	>500 ms	>500 ms
Output Specifications		
Type of Contact	(1) Form C	(1) Form C
Rated Insulation Voltage	250V AC	250V AC
Supply Specifications		
	Terminals A1, A2 or A3, A2	Terminals A1, A2 or A3, A2
Rated Operational Voltage	24 to 48 V AC/DC +/- 15%	115/230V AC +/- 15%
	45 to 65 Hz, Insulated	45 to 65 Hz, Insulated
Rated Operational Power	4VA, 3 W	4VA, 3 W
General Specifications		
Power ON Delay	1 s +/- 0.5 s or 6 s +/- 0.5 s	1 s +/- 0.5 s or 6 s +/- 0.5 s
Environment		
Degree of Protection	IP 20	IP 20
Pollution Degree	3	3
Dimensions (W x H x D)	22.5 x 80 x 99.5 mm	22.5 x 80 x 99.5 mm
Screw Terminals	Max. 0.5 N•m	Max. 0.5 N•m

3

Bulletin 813S Voltage Relay, Three-Phase

Cat. No.	813S-V3-110V	813S-V3-230V	813S-V3-400V	813S-V3-480V	813S-V3-690V
Input Specifications					
Input	Terminals L1, L2, L3, N	Terminals L1, L2, L3, N	Terminals L1, L2, L3, N	Terminals L1, L2, L3, N	Terminals L1, L2, L3, N
Supply	110...115V AC	208...240V AC	380...415V AC	440...480V AC	600...690V AC
	Self-powered	Self-powered	Self-powered	Self-powered	Self-powered
Frequency	50...400 Hz	50...400 Hz	50...400 Hz	50...400 Hz	50...400 Hz
Ranges					
Upper Level	+2...+22% of the nominal voltage	+2...+22% of the nominal voltage	+2...+22% of the nominal voltage	+2...+22% of the nominal voltage	+2...+22% of the nominal voltage
Lower Level	-22...-2% of the nominal voltage	-22...-2% of the nominal voltage	-22...-2% of the nominal voltage	-22...-2% of the nominal voltage	-22...-2% of the nominal voltage
Asymmetry	2...22% of the nominal voltage	2...22% of the nominal voltage	2...22% of the nominal voltage	2...22% of the nominal voltage	2...22% of the nominal voltage
Tolerance	2...22% of the nominal voltage	2...22% of the nominal voltage	2...22% of the nominal voltage	2...22% of the nominal voltage	2...22% of the nominal voltage
Hysteresis					
Set Points from 2...5%	1%	1%	1%	1%	1%
Set Points from 5...22%	2%	2%	2%	2%	2%
Output Specifications					
Type of Contact	(2) Form C, Normally Energized	(2) Form C, Normally Energized	(2) Form C, Normally Energized	(2) Form C, Normally Energized	(2) Form C, Normally Energized
Rated Insulation Voltage	250V AC	250V AC	250V AC	250V AC	250V AC
Supply Specifications					
Rated Operational Power	13 VA @ Δ 400V AC, 50 Hz	13 VA @ Δ 400V AC, 50 Hz	13 VA @ Δ 400V AC, 50 Hz	13 VA @ Δ 400V AC, 50 Hz	21 VA @ Δ 600V AC, 50 Hz
General Specifications					
Power ON Delay	1 s +/- 0.5 s or 6 s +/- 0.5 s	1 s +/- 0.5 s or 6 s +/- 0.5 s	1 s +/- 0.5 s or 6 s +/- 0.5 s	1 s +/- 0.5 s or 6 s +/- 0.5 s	1 s +/- 0.5 s or 6 s +/- 0.5 s
Environment					
Degree of Protection	IP 20	IP 20	IP 20	IP 20	IP 20
Pollution Degree	3	3	3	3	3
Dimensions (W x H x D)	45 x 80 x 99.5 mm	45 x 80 x 99.5 mm	45 x 80 x 99.5 mm	45 x 80 x 99.5 mm	45 x 80 x 99.5 mm
Screw Terminals	Max. 0.5 N•m	Max. 0.5 N•m	Max. 0.5 N•m	Max. 0.5 N•m	Max. 0.5 N•m

Next Generation Dedicated Function Motor Protection Relays

Specifications

Bulletin 814S Power Factor Relay, Three-Phase

Cat. No.	814S-PF3-480V-10A	814S-PF3-690V-10A
Input Specifications		
Input	Terminals L1, L2, L3	Terminals L1, L2, L3
Voltage	380...480V AC	600...690V AC
Current	Self-powered 1...10 A	Self-powered 1...10 A
Measuring Ranges		
Power Factor (cos φ)		
Upper Level	0.1...0.99	0.1...0.99
Lower Level	0.1...0.99	0.1...0.99
Direct Input		
Upper Level	1...10 A	1...10 A
Lower Level	50 A	50 A
Contact Input	Terminals Z1, Y1	Terminals Z1, Y1
Disabled	>10 k Ω	>10 k Ω
Enabled	<500 Ω	<500 Ω
Pulse Width	>500 ms	>500 ms
Hysteresis	PF Approx. 0.1	PF Approx. 0.1
Output Specifications		
Type of Contact	(1) Form C	(1) Form C
Rated Insulation Voltage	250V AC	250V AC
Supply Specifications		
Rated Operational Power	13 VA @ Δ 400V AC, 50 Hz	21 VA @ Δ 600V AC, 50 Hz
General Specifications		
Power ON Delay	1 to 30 s +/- 0.5 s	1 to 30 s +/- 0.5 s
Environment		
Degree of Protection	IP 20	IP 20
Pollution Degree	3	3
Dimensions (W x H x D)	45 x 80 x 99.5 mm	45 x 80 x 99.5 mm
Screw Terminals	Max. 0.5 N•m	Max. 0.5 N•m

Bulletin 814S Power (kW) Relay, Three-Phase

Cat. No.	814S-W3-480V-10A	814S-W3-690V-10A
Input Specifications		
Input	Terminals L1, L2, L3	Terminals L1, L2, L3
Voltage	380...480V AC	600...690V AC
Current	Self-powered 1...10 A	Self-powered 1...10 A
Measuring Ranges		
Active Power		
Upper Level	-100...+100%	-100...+100%
Lower Level	-100...+100%	-100...+100%
Direct Input		
Upper Level	1...10 A	1...10 A
Lower Level	50 A	50 A
Contact Input	Terminals Z1, U2	Terminals Z1, U2
Disabled	>10 k Ω	>10 k Ω
Enabled	<500 Ω	<500 Ω
Pulse Width	>500 ms	>500 ms
Hysteresis	~2% of Set Value - Fixed	~2% of Set Value - Fixed
Output Specifications		
Type of Contact	(1) Form C	(1) Form C
Rated Insulation Voltage	250V AC	250V AC
Supply Specifications		
Rated Operational Power	13 VA @ Δ 400V AC, 50 Hz	21 VA @ Δ 600V AC, 50 Hz
General Specifications		
Power ON Delay	1 to 30 s +/- 0.5 s	1 to 30 s +/- 0.5 s
Environment		
Degree of Protection	IP 20	IP 20
Pollution Degree	3	3
Dimensions (W x H x D)	45 x 80 x 99.5 mm	45 x 80 x 99.5 mm
Screw Terminals	Max. 0.5 N•m	Max. 0.5 N•m



Next Generation Dedicated Function Motor Protection Relays

Specifications

Bulletin 817S Thermistor Relay


Cat. No.	817S-PTC-48	817S-PTC-115	817S-PTC-230
Input Specifications			
Input	Terminals T1, T2	Terminals T1, T2	Terminals T1, T2
Supply	24...48 V AC/DC	115V AC	230V AC
Measuring Ranges			
Max Cold PTC Resistance	1500 Ω	1500 Ω	1500 Ω
Alarm Setpoint	3100 Ω +/- 10%	3100 Ω +/- 10%	3100 Ω +/- 10%
Return Setpoint	1650 Ω +/- 10%	1650 Ω +/- 10%	1650 Ω +/- 10%
Short-circuit Detection	0...10 Ω	0...10 Ω	0...10 Ω
Measurement Voltage	<2.5 V	<2.5 V	<2.5 V
Contact Input			
Disabled	Terminals Z1, Z2	Terminals Z1, Z2	Terminals Z1, Z2
Enabled	>10 k Ω	>10 k Ω	>10 k Ω
Alarm Reset	<500 Ω	<500 Ω	<500 Ω
Alarm Reset	>500 ms	>500 ms	>500 ms
Output Specifications			
Type of Contact	(1) Form C	(1) Form C	(1) Form C
Rated Insulation Voltage	250V AC	250V AC	250V AC
Supply Specifications			
Rated Operational Power			
AC	2.5VA	2.5VA	2.5VA
DC	1.5 W	1.5 W	1.5 W
General Specifications			
Alarm ON Delay	<150 ms	<150 ms	<150 ms
Reset Delay	<500 ms	<500 ms	<500 ms
Environment			
Degree of Protection	IP 20	IP 20	IP 20
Pollution Degree	3	3	3
Dimensions (W x H x D)	22.5 x 80 x 99.5 mm	22.5 x 80 x 99.5 mm	22.5 x 80 x 99.5 mm
Screw Terminals	Max. 0.5 N•m	Max. 0.5 N•m	Max. 0.5 N•m

Next Generation Dedicated Function Motor Protection Relays

Function and Wiring Diagrams

Function and Wiring Diagrams

Bulletin 809S Wiring Diagram

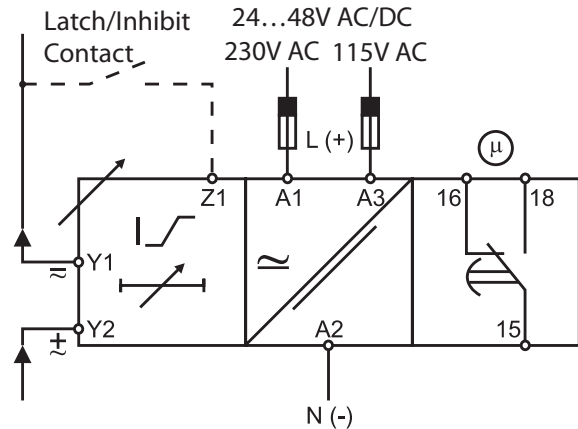

Terminals	Power Supply
A1, A2	24/48V AC/DC
	230V AC
A3, A2	115V AC


3

Single-Phase Current Monitoring Relays


These devices are TRMS AC/DC over- or undercurrent monitoring relays. Through the built-in shunt, it is possible to monitor loads up to 10 A AC/DC by direct measuring or through a current transformer. When monitoring current through a current transformer and the latch function is disabled, the relay operates when the measured value exceeds (or drops below) the set level for more than the set delay time. It releases when the current drops below (or exceeds) the set level or when the power supply is interrupted. With the built-in latch function, the ON position of the relay output can be maintained. The inhibit function can be used to avoid relay operation when not desired. The LEDs indicate the state of the alarm and the output relay.

Bulletin 809S Function Diagrams


Overcurrent - Normally De-energized relay

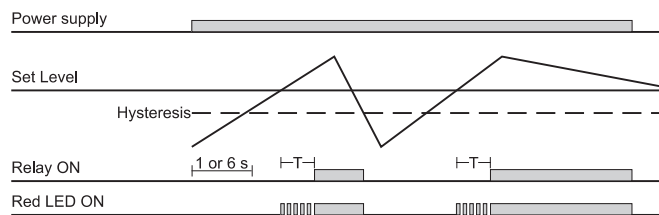


Overcurrent - Inhibit function - Normally De-energized relay

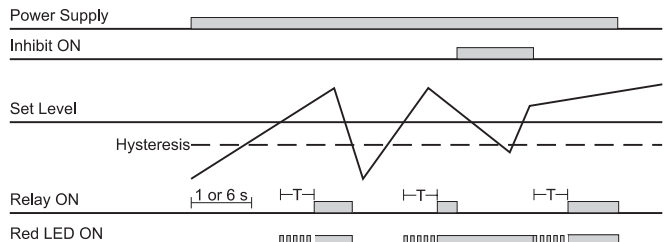

Undercurrent - Normally De-energized relay

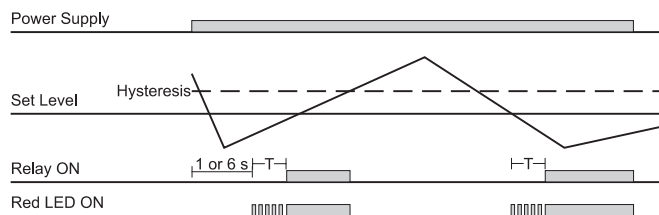


Undercurrent - Latch function - Normally De-energized relay

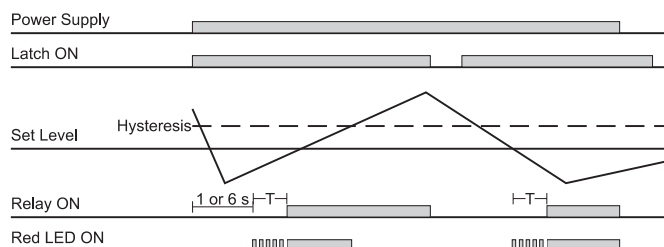

Next Generation Dedicated Function Motor Protection Relays

Function and Wiring Diagrams

Bulletin 813S Wiring Diagram — Single-Phase

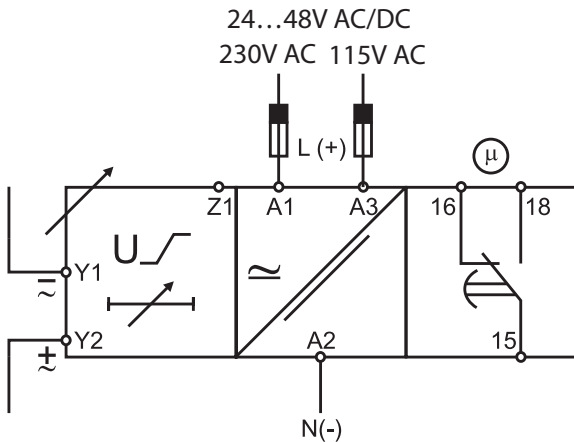

Terminals	Power Supply
A1, A2	24/48V AC/DC
	230V AC
A3, A2	115V AC




Single-Phase Voltage Monitoring Relays


These devices are TRMS AC/DC over- or undervoltage monitoring relays. When the latch function is disabled, the relay operates when the measured value exceeds (or drops below) the set level for more than the set delay time. It releases when the voltage drops below (or exceeds) the set level or when the power supply is interrupted. With the built-in latch function, the ON position of the relay output can be maintained. The inhibit function can be used to avoid relay operation when not desired. The LEDs indicate the state of the alarm and the output relay.

Bulletin 813S Function Diagrams — Single-Phase


Overvoltage - Normally De-energized relay

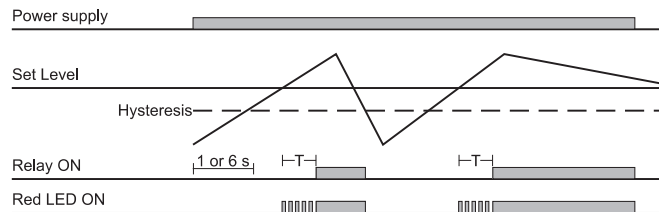


Overvoltage - Inhibit function - Normally De-energized relay

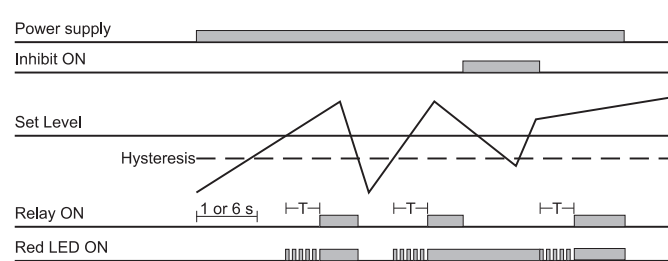

Undervoltage - Normally De-energized relay

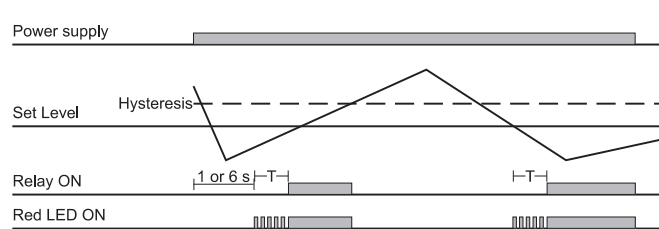


Under voltage - Latch function - Normally De-energized relay

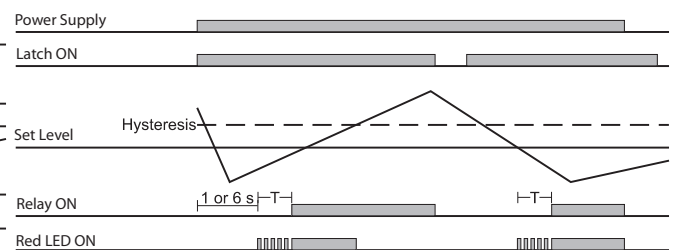

Next Generation Dedicated Function Motor Protection Relays

Function and Wiring Diagrams

Bulletin 813S Wiring Diagram — Three-Phase

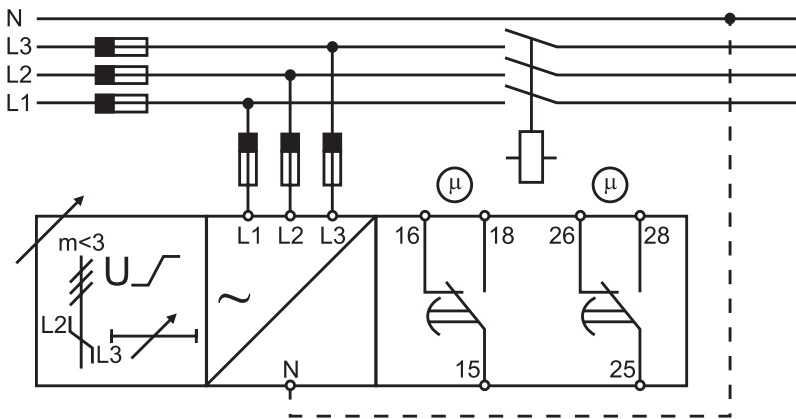


3

Three-Phase Voltage Monitoring Relays

These self-powered devices are TRMS three-phase over- and undervoltage, phase sequence, phase loss, and asymmetry and tolerance monitoring relays. For voltage level monitoring, if one or more phase-phase or phase-neutral voltage exceeds the upper set level or drops below the lower set level, the red LED starts flashing and the respective output relay releases after the set time period. For asymmetry and tolerance monitoring, if one or more phase-phase or phase-neutral voltage exceeds the set levels, the red LED starts flashing and the respective output relay releases after the set time period. For both functions, if the phase sequence is wrong or one phase is lost, both output relays release immediately.


Bulletin 813S Function Diagrams — Three-Phase

Asymmetry and tolerance monitoring (2 x SPDT relays)

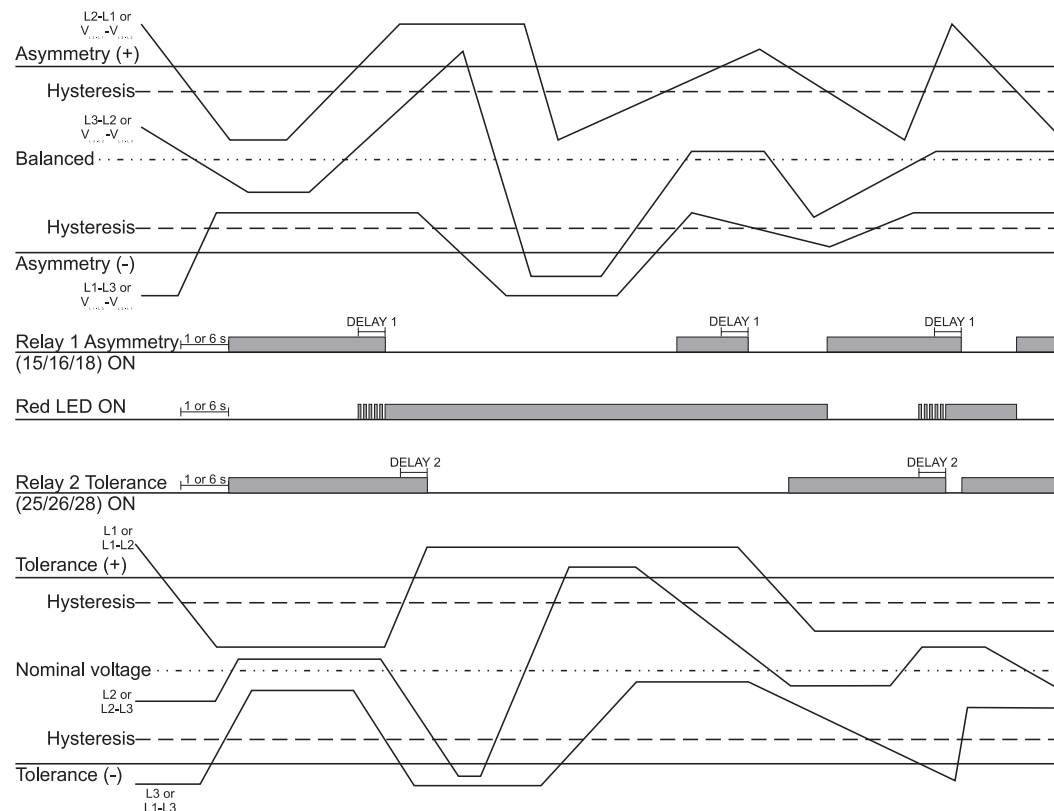


Bulletin 813S Function Diagrams — Three-Phase, Continued

Over and undervoltage monitoring (2 x SPDT relays)

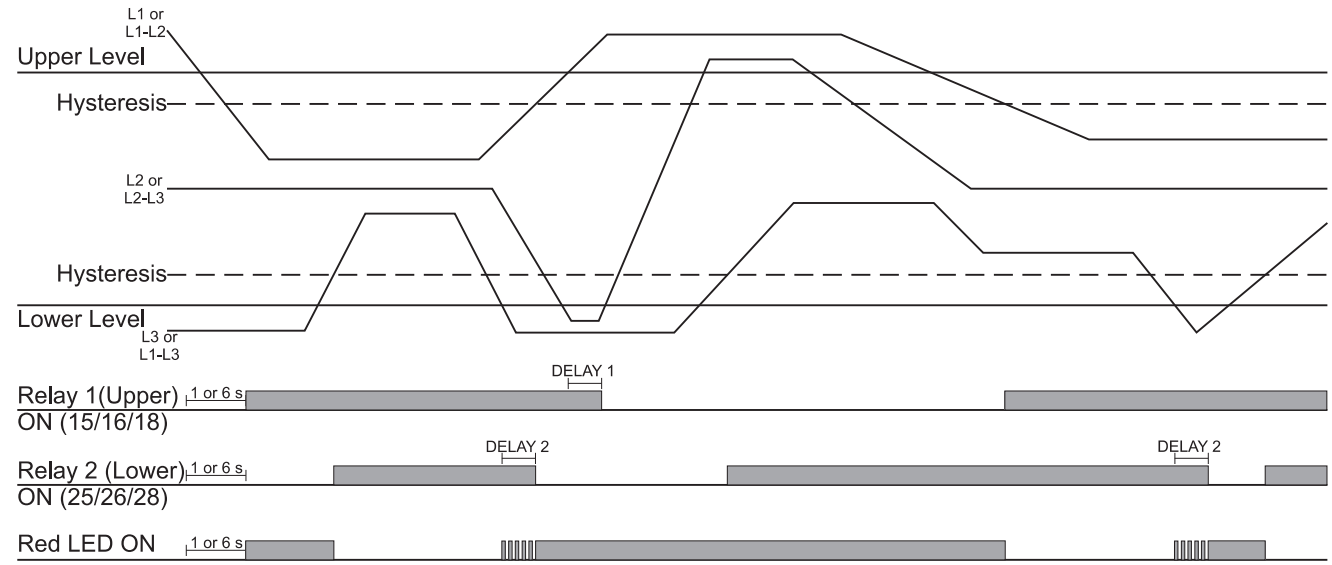

3


Phase sequence, total phase loss

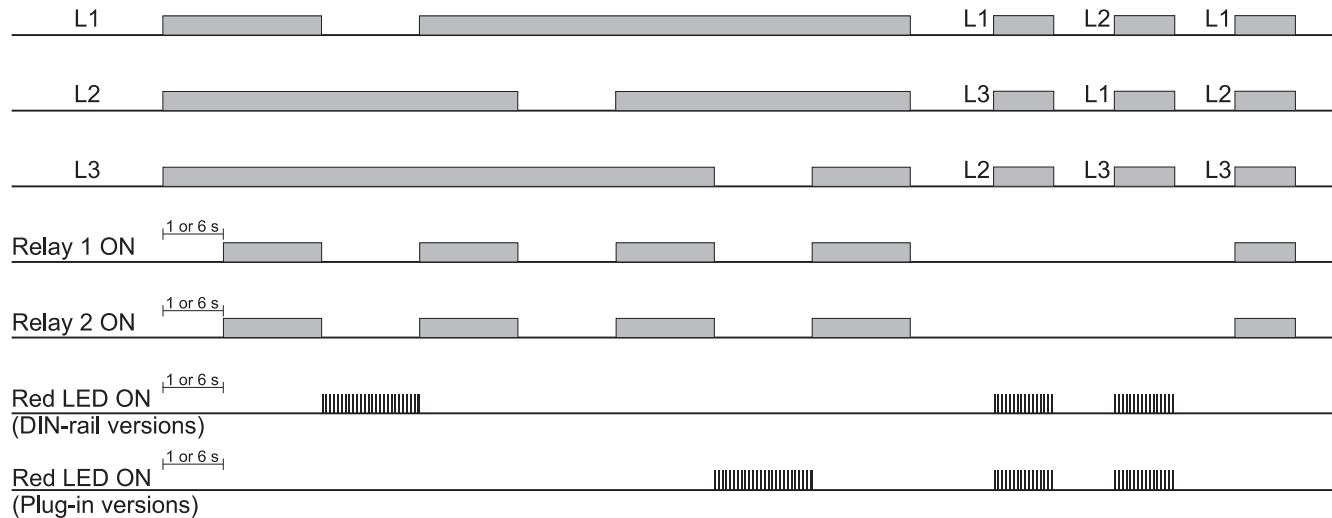

Next Generation Dedicated Function Motor Protection Relays

Function and Wiring Diagrams

Bulletin 814S Wiring Diagram — Power (kW) Type

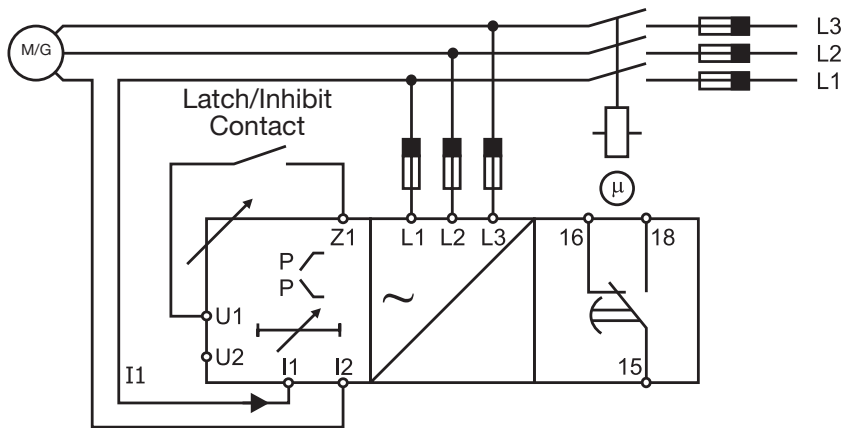


3

Three-Phase Active Power (kW) Monitoring Relays


These self-powered devices are TRMS active power monitoring relays for three-phase balanced systems. They can be used for monitoring the actual load of asynchronous motors and other symmetrical loads, as well as to see if the power flows in the correct direction. The monitoring relay measures the active power of a three-phase balanced system. The relay has an adjustable power ON delay in order to avoid undesired overload detection during motor start. With the built-in latch function, the ON-position of the relay output can be maintained. The inhibit function can be used to avoid relay operation when not desired. The LEDs indicate the state of the alarm and the output relay.

Bulletin 814S Function Diagrams — Power (kW) Type


Inhibit function - Normally De-energized relay

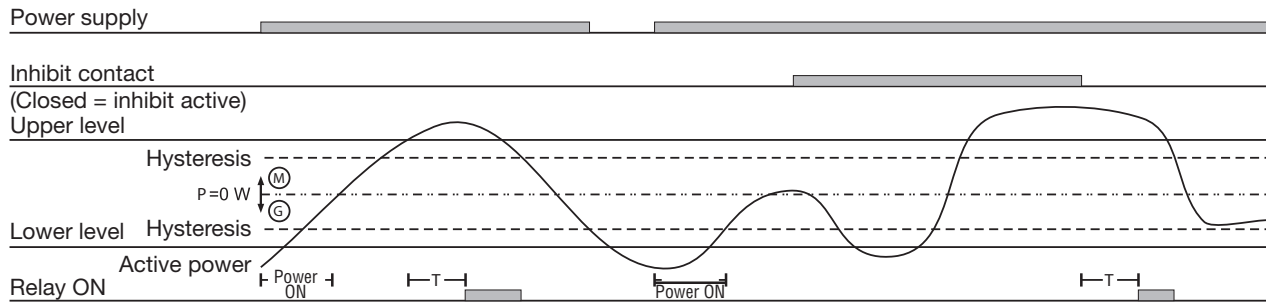

Latch function - Normally Energized relay

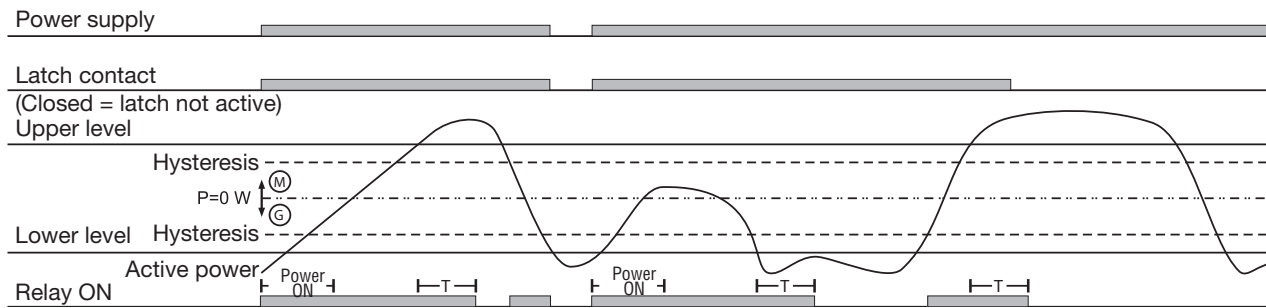


Start and stop function - Normally Energized relay

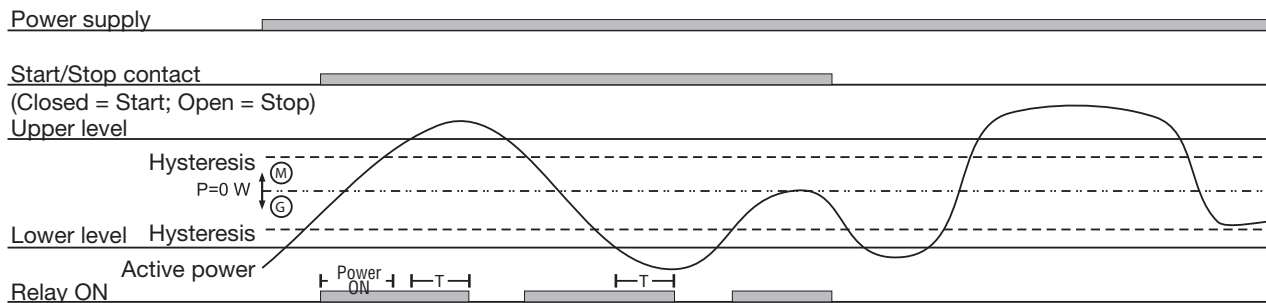

Next Generation Dedicated Function Motor Protection Relays

Function and Wiring Diagrams

Bulletin 814S Wiring Diagram — Power Factor Type

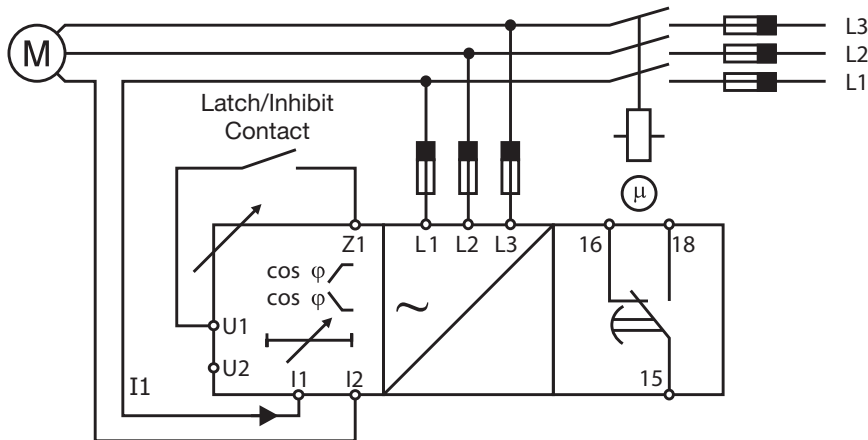


Three-Phase Power Factor Monitoring Relays


These self-powered devices are TRMS power factor monitoring relays for three-phase balanced systems. They can be used for monitoring the actual load of asynchronous motors and other symmetrical loads, where the power factor is almost proportional to the load. The relay measures the absolute value for the power factor of the system $PF = \text{Active Power} / \text{Apparent Power}$ that is for balanced system with sinus waveforms the cosine of the angle between motor current and motor voltage ($\cos \vartheta$). As $\cos \vartheta$ varies with the load of the motor, underload and overload can be indirectly detected by the monitoring relay. With the built-in latch function, the ON-position of the relay output can be maintained. The inhibit function can be used to avoid relay operation when not desired. The LEDs indicate the state of the alarm and the output relay.

Bulletin 814S Function Diagrams — Power Factor Type

Inhibit function - Normally De-energized relay

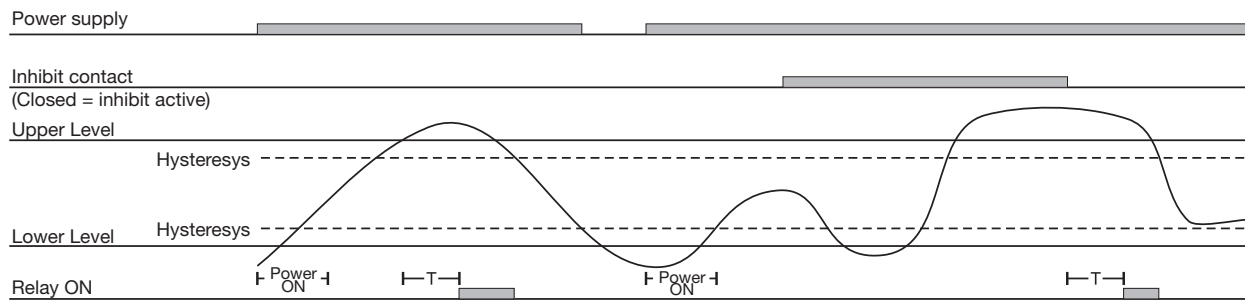

Latch function - Normally Energized relay

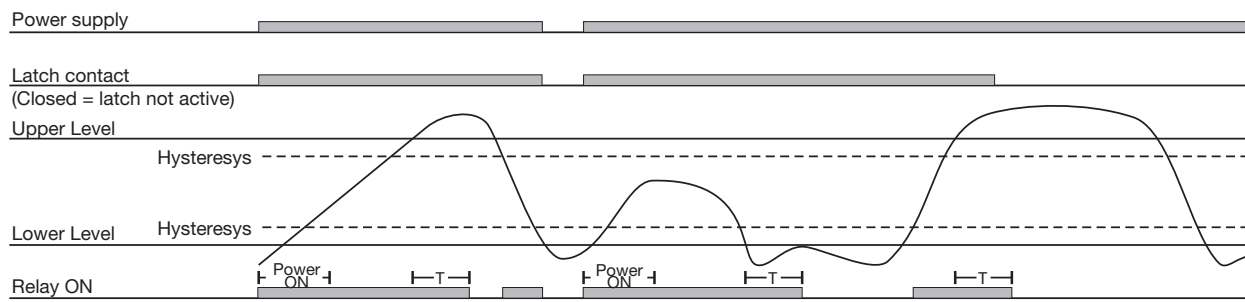

Start and stop function - Normally Energized relay




Next Generation Dedicated Function Motor Protection Relays

Function and Wiring Diagrams/Approximate Dimensions


Thermistor Monitoring Relays

These devices are motor temperature monitoring relays, used to monitor the temperature of the coils of a motor with built-in PTCs. The alarm status of the relay can be reset by either an external contact or an internal button. The test button allows the simulation of the fault condition. The LEDs indicate the alarm status.

Bulletin 817S Wiring Diagram

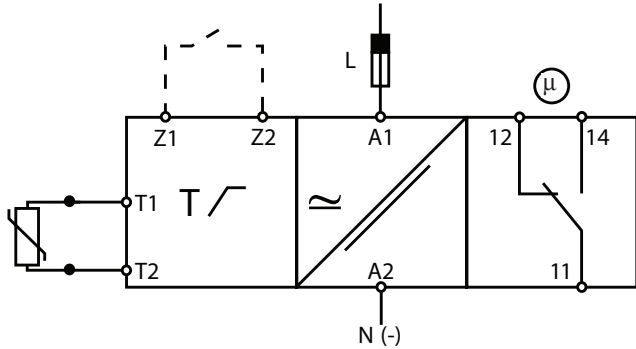


Bulletin 817S Function Diagram

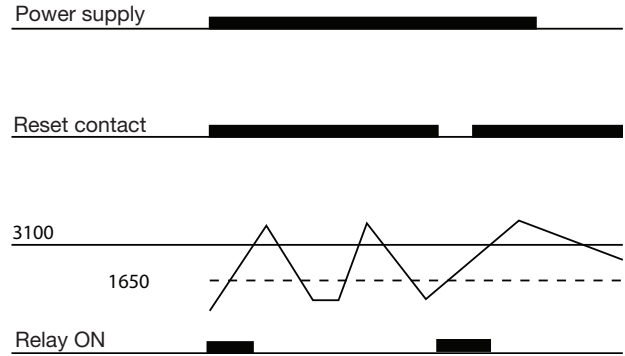


Approximate Dimensions



Dimensions shown are in millimeters (inches) Dimensions are not intended for manufacturing purposes.

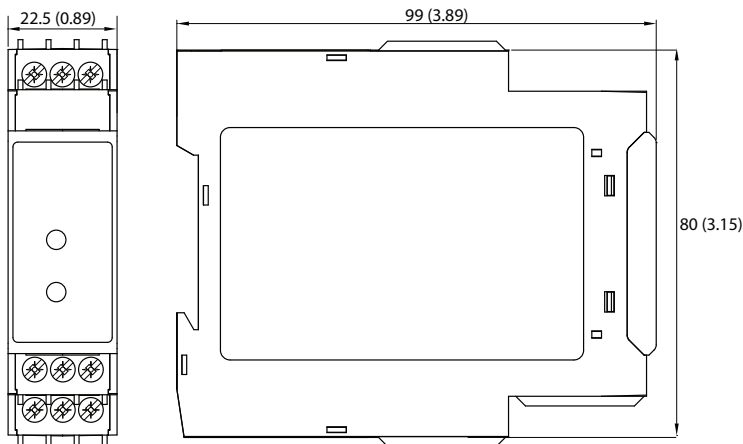Bulletin 809S, 813S Single-Phase Relays/Bulletin 817S Thermistor Relays

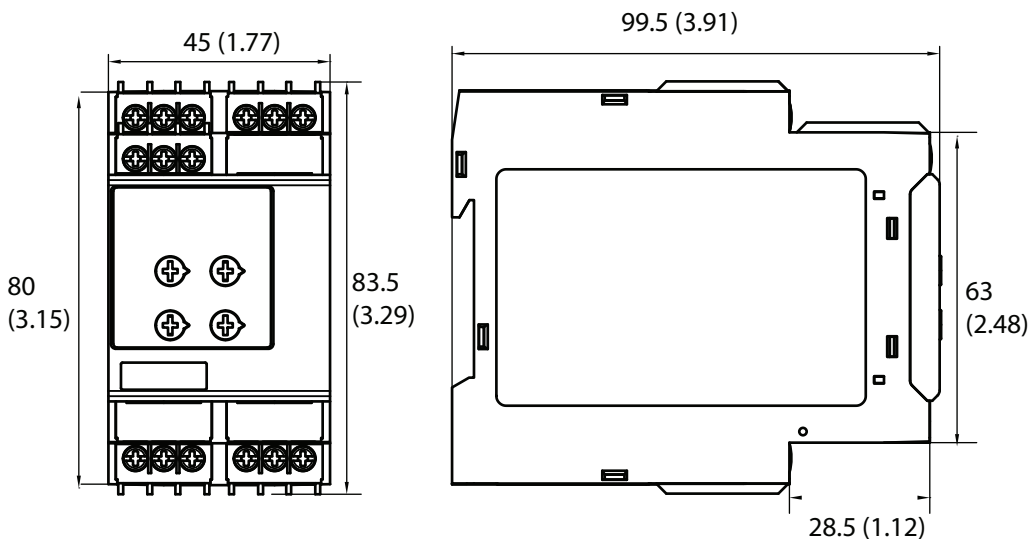

Bulletin 813S, 814S Three-Phase Relays



 <p>Arcing Ground Fault Relay Cat. No. 1409-DOBD</p>  <p>Arcing Ground Fault Sensor Cat. No. 1409-N2</p>	<p>Bulletin 1409 — Arcing Ground Fault Detection System</p> <ul style="list-style-type: none"> • Adjustable trip from 1...6 A for maximum sensitivity without nuisance tripping • Output Form C contact (single-pole double-throw) for application flexibility • Time delay of 50 ms nominal to minimize nuisance tripping and allow time for high current inhibit • Test circuit is built into test system for proper operation 	<p>Table of Contents</p> <p>Product Selection 3-16</p> <p>Specifications..... 3-17</p> <p>Typical Wiring</p> <p>Diagrams..... 3-17</p> <p>Approximate</p> <p>Dimensions..... 3-18</p> <p>Standards Compliance</p> <p>CSA C22.2, No. 144</p> <p>UL 1053</p> <p>Certifications</p> <p>CSA Certified (LR49901)</p> <p>UL Listed (File E53935, Guide KDAX)</p>
--	---	---

The Bulletin 1409 Arcing Ground Fault Detection Systems are intended for equipment protection only. **These systems are not Ground-Fault Circuit-Interruption devices for personnel protection as defined in Article 100 of the U.S. National Electric Code.**

Bulletin 1409 is available in two designs, Class I and Class II. The Class I systems are intended for use with shunt-trip circuit breakers or medium voltage controllers. These Class I systems **do not** contain a high-current inhibit circuit.

The Class II Systems are designed for use with motor starters or contactors to interrupt low-level ground faults. They incorporate a high-current inhibit circuit that guards against the controller opening when the fault current exceeds the controller interrupting capacity. Ground fault currents exceeding the interrupting rating of the controllers are designed to be cleared by the short circuit protection device (fuse or circuit breaker).

Both Class I and Class II Systems consist of two parts — a relay and a sensor. The relay contains all the detection, adjustment and output circuitry. The sensor is a special two-winding current transformer. Operation of the ground fault detection system is indicated by the relay toggle.

Arcing Ground Fault Detection System

Product Selection

Product Selection

Arcing Ground Fault Relays — Class II with High Current Inhibit Feature

NEMA Starter Size	Maximum Voltage [V AC]	Maximum Horsepower [Hp]	Full Load Current [A]	High Current Inhibit [A]		Cat. No.
				Min.	Max.	
1	200...230	7.5	27	114	144	1409-BOAD
	460	10	14	63	79	1409-BOBD
	575	10	11	50	62	1409-BOCD
2	200...230	15	45	189	239	1409-COAD
	460	25	34	153	193	1409-COBD
	575	25	27	122	153	1409-COCD
3	200...230	30	90	360	456	1409-DOAD
	460	50	65	293	370	1409-DOBD
	575	50	52	234	296	1409-DOCD
4	200...230	50	135	585	741	1409-EOAD
	460	100	124	558	706	1409-EOBD
	575	100	99	446	564	1409-EOCD
5	200...230	100	270	1116	1413	1409-FOAD
	460	200	240	1080	1368	1409-FOBD
	575	200	192	864	1094	1409-FOCD
6	200...230	200	540	2160	2736	1409-GOAD
	460	400	465	2147	2718	1409-GOBD
	575	400	372	1719	2177	1409-GOCD

Arcing Ground Fault Sensors

NEMA Starter Size	Max. Recommended Cable Size*	Window Diameter	Cat. No.
1...2	2 AWG @ 600V AC	1-9/16 in.	1409-N1
3...4	250 MCM @ 600V AC 4/0 @ 5000V AC 4/0 @ 8000V AC*	2-1/2 in.	1409-N2
5	500 MCM @ 600V AC 350 MCM @ 5000V AC 350 MCM @ 8000V AC*	3-1/4 in.	1409-N3
6	2-500 MCM @ 600V AC 500 MCM @ 5000V AC 500 MCM @ 8000V AC*	4-1/4 in.	1409-N4

* For a 3-phase system with one cable per phase except as indicated.

* 8000V cable — select sensor to have a window diameter greater than 2.5 times the cable diameter.

Arcing Ground Fault Relays — Class I without High Current Inhibit Feature

Application	Max. Line Voltage [V]	Cat. No.
Shunt-Trip Circuit Breaker	600	1409-MV
Medium Voltage Controller	7200	

Note: Interrupting capacity is determined by starter or circuit breaker selection.




Specifications

Response Time	50 ms nominal plus the controller drop-out time
Supply Voltage	120V AC, 60 Hz
Power Input	3 VA
Temperature Range	The operating ambient temperature range for the sensor is -40...+85 °C (-40...+184 °F) and for the relay is 0...+65 °C (32...149 °F)
Output Contact Rating	Make 30 A; Break 3 A; Continuous carrying current 5 A at 120V


Typical Wiring Diagrams

See Applicable Codes and Laws.

Class II with High Current Inhibit Circuit*

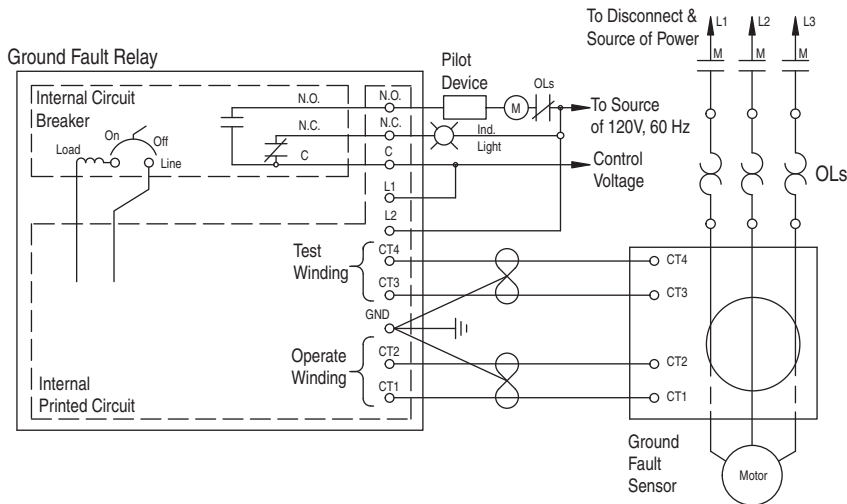

Class I without High Current Inhibit Circuit*

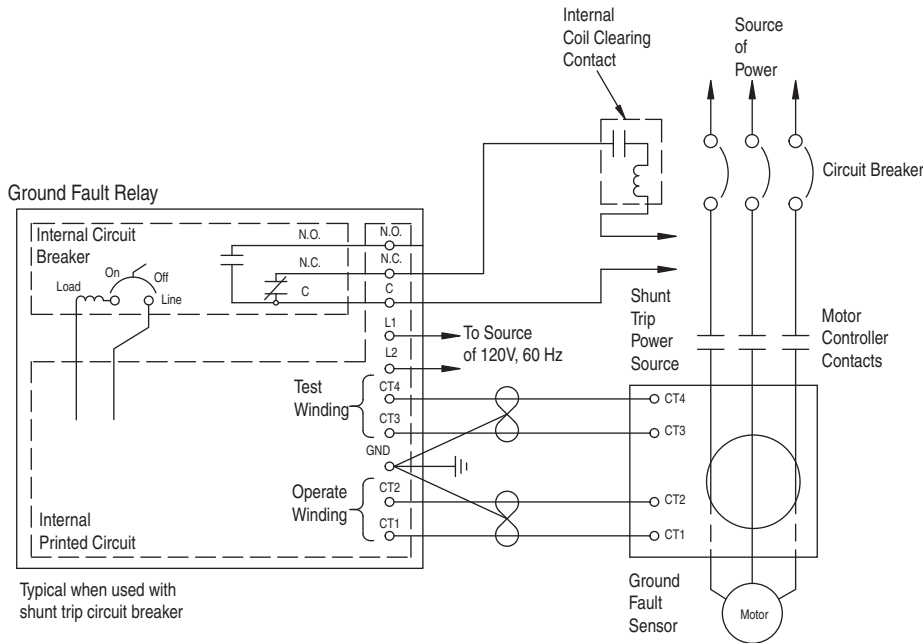

Typical when used with shunt trip circuit breaker

* Wiring diagrams are shown in the tripped condition.


Arcing Ground Fault Detection System

Approximate Dimensions

Approximate Dimensions



Dimensions are shown in millimeters (inches). Dimensions are not intended to be used for manufacturing purposes.

Arcing Ground Fault Relay

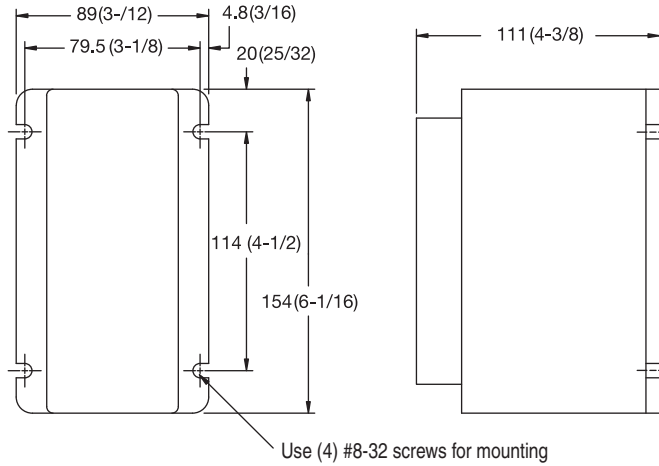

3

Arcing Ground Fault Sensors

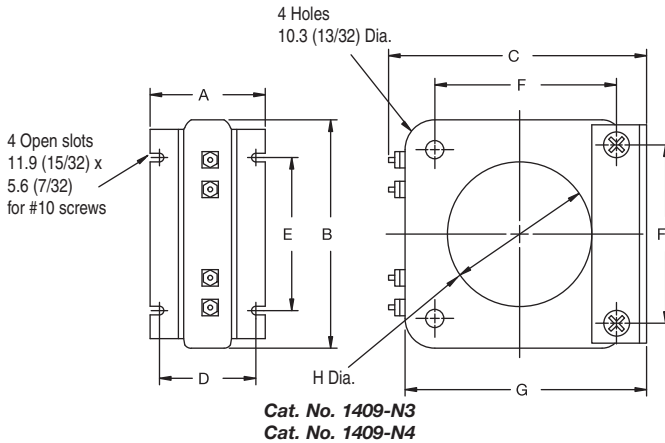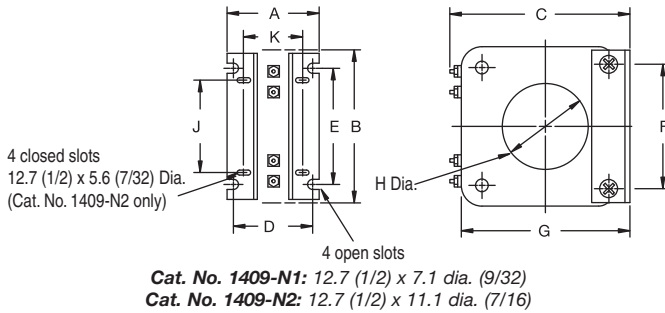

Cat. No.	A	B	C	D	E	F	G	H	J	K
1409-N1	92.6 (3-21/32)	88.9 (3-1/2)	104 (4-3/32)	74 (2-15/16)	67.3 (2-21/32)	56.4 (2-7/32)	92.9 (3-21/32)	39.6 (1-9/16)	—	—
1409-N2	91.4 (3-19/32)	115.8 (4-9/16)	131.8 (5-3/16)	77 (3-1/32)	88.9 (3-1/2)	88.9 (3-1/2)	120.6 (4-3/4)	63.5 (2-1/2)	69.8 (2-3/4)	54.9 (2-5/32)
1409-N3	73.2 (2-7/8)	144 (5-11/16)	157.2 (6-3/16)	54.9 (2-5/32)	96.8 (3-13/16)	119.4 (4-23/32)	146.1 (5-3/4)	82.6 (3-1/4)	—	—
1409-N4	77.2 (3-1/32)	169.9 (6-11/16)	182.6 (7-3/16)	59.5 (2-11/32)	123.7 (4-7/8)	138.2 (5-7/16)	171.5 (6-3/4)	108 (4-1/4)	—	—



Motor Winding Heater

Bulletin 1410 — Motor Winding Heater

- Solid-state design
- Automatic operation
- No adjustments required

Bulletin 1410 Motor Winding Heater is intended for use with 3-phase AC motors to guard against damage caused by condensation build-up on motor windings, which can occur in high-humidity environments during motor off times. **This device is not intended to be used to dry out damp motors.**

Bulletin 1410 Motor Winding Heater is designed for used with 3-phase AC squirrel-cage motors controlled by automatic full-voltage starters. For applications involving reduced-voltage starters, multi-speed starters, synchronous motors, or the used of power factor correction capacitors, consult your local Rockwell Automation sales office or Allen-Bradley distributor.

Standards Compliance

CSA C22.2, No. 14
UL 508

Certifications

CSA Certified (LR 1234)
UL Listed (File E56639,
Guide NMTR)


Product Selection*

3-Phase Motor Voltage, +10%, -5%, 60 Hz	3-Phase Hp Rating	Cat. No.
230	15...50	1410-EOA47
460	25...100	1410-EOB50
575	25...100	1410-EOC50
230	50...100	1410-FOA50
460	100...200	1410-FOB54
575	100...200	1410-FOC54
230	100...200	1410-GOA54
460	200...400	1410-GOB59
575	200...400	1410-GOC59
230	200...300	1410-HOA57
460	400...600	1410-HOB62
575	400...600	1410-HOC62

* For applications requiring different horsepower, kilowatt, and voltage ranges from those listed, consult your local Rockwell Automation sales office or Allen-Bradley distributor.

Connection Diagram

See Applicable Codes and Laws.

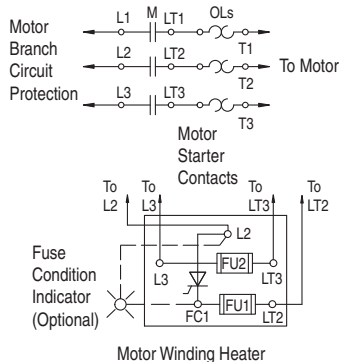


Specifications

Output Voltage Regulation	Voltage applied to motor winding will vary $\pm 5\%$ maximum for line voltage variations of +10%, -15%.	
Ambient Temperature Range	Operating	0...50 °C (32...122 °F)
	Storage	-25...+85 °C (-13...+184 °F)
Additional SCR Protection	Metal oxide varistor protects against voltage surges. RC snubber circuit limits rate of change of circuit voltage.	
True RMS Output Current	Approximately 15% of full load current.	
Power Delivered to the Motor	Approximately 1...3 W/Hp.	

Approximate Dimensions

Dimensions are shown in millimeters (inches). Dimensions are not intended to be used for manufacturing purposes

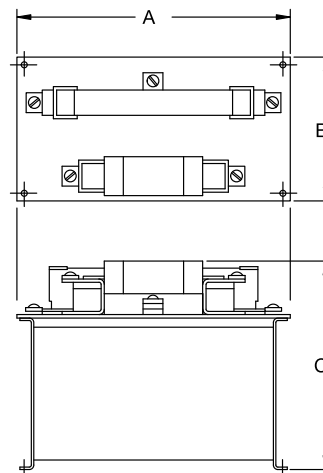

Cat. No.	A	B	C
1410-EOA47	146.1	88.9	114.3
1410-EOB50	(5-3/4)	(3-1/2)	(4-1/2)
1410-EOC50			
1410-FOA50	204.8	108	177.8
1410-FOB54	(8-1/16)	(4-1/4)	(7)
1410-FOC54			
1410-GOA54	238.1	146.1	206.4
1410-GOB59	(9-3/8)	(5-3/4)	(8-1/8)
1410-GOC59			
1410-HOA57	279.4	244.5	207.2
1410-HOB62	(11)	(9-5/8)	(8-5/32)
1410-HOC62			

Supplemental Motor Protection

Notes

3