




AR-N8601

MicroBox with VIA Eden ULV 500MHz, 3 x 10/100Mbps LAN, SATA, CF, Serial Port, USB2.0

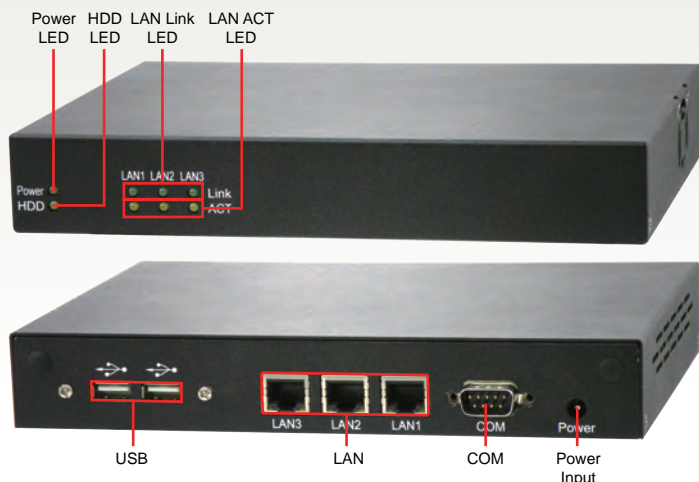

Features

- ✓ VIA Eden ULV 500MHz
- ✓ 3 x 10/100 LAN
- ✓ SATA, CF, USB2.0
- ✓ Support Console Function

Networking System

Specification

System	
CPU	VIA Eden ULV 500MHz
Chipset	VIA CN700 + 8237R plus
Memory	1 x 200-pin SO-DIMM socket support 400/533MHz DDR2 SDRAM up to 1GB, 512MB pre-installed
BIOS	Award
OS	Windows XP, Linux 2.6.11 and 2.6.18, Fedora 5/6/7/8
Video	
Video Interface	VGA (Onboard pin header)
Ethernet	
Chipset	Realtek RTL8100C (10/100Mbps) x 3
Connector	RJ45
LAN	3 x 10/100Mbps LAN
PXE	Yes
Bypass LAN	N/A
Auto-MDIX	N/A
Storage	
SATA	1 x SATA port
CF	1 x Compact Flash socket
HDD Bay	1 x 2.5" HDD bracket
I/O	
Serial Port	1 x RS-232 (1 x DB9)
USB Port	2 x USB2.0 (2 x external port)

Mechanical & Environment	
Dimension	210mm x 150mm x 33mm
Power Requirement	DC 12V Input Power Supply
Operating Temp.	0~40°C (32~104°F)
Storage Temp.	-20~80°C (-4~176°F)
Relative Humidity	0 to 90% @ 40°C, non-condensing
Safety	CE, FCC

- ### Packing List
1. AR-N8601 x 1
 2. Driver CD x 1
 3. Quick user manual x 1
 4. Console cable x 1
 5. SATA cable x 1
 6. SATA power cable x 1
 7. Power cord (Optional for USA or EU type) x 1
 8. Power adaptor x 1

Standard	
AR-N8601	MicroBox with VIA Eden ULV 500MHz, 512MB DDR2, 3 x 10/100Mbps LAN, SATA, CF, Serial Port, USB2.0