


MB860 Mini ITX Long Life Pentium® 4 Motherboard

Transmeta™ Efficeon™ Mini-ITX Motherboard

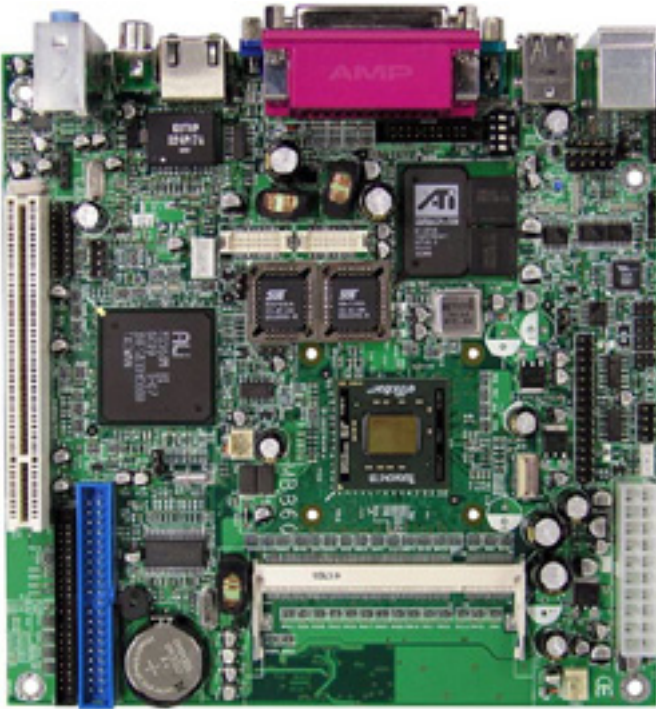

SPECIFICATIONS

CPU Socket

Transmeta™ Efficeon™ TM8600, up to 1.2 GHz

Chipset

Transmeta™ Efficeon™ T8600 + ALi M1563M

Front Side Bus

66 MHz

BIOS

Award 8Mbit

Watchdog Timer

256 levels

Expansion Slot

1-PCI

System Memory

One socket, up to 1 GB DDR SODIMM

VGA

ATI M7CSP-16, 16 MB embedded RAM, TV-out, TMDS

LAN

Realtek® 8100C or RTL8110S-32 10/100 MHz, RJ-45
(Gigabit LAN optional)

Audio

Built-in audio + AC97 codec

Input/Output

Winbond W83627 + Fintek 81216

2x IDE (UDMA 33/66/100/133), 1 x FDD, 1 x KB, 1 x mouse, 4 x RS-232, 1 x LPT

USB

4-ports (USB 2.0)

Dimensions

170 mm x 170 mm (6.7" x 6.7")

Power Consumption

+5V: 3A, 5VSB: 0.2A

+/- 12V: 0.4A

3.3V: 3A

Operating Temperature

0° C. ~ 60° C. (32° F ~ 140° F)

Storage Temperature

-20° C. ~ 80° C. (-68° F. ~ 176° F.)

Relative Humidity

10% ~ 90% (non-condensing)

Ordering Information:

MB860

Transmeta™ Efficeon™ 1 GHz mini-ITX motherboard
w/ ATI VGA and 10/100 Ethernet

MB860F

Transmeta™ Efficeon™ 1 GHz mini -ITX motherboard
w/ ATI VGA and Gigabit Ethernet

All specifications are subject to change without notice.