


BBS-1200

1U High, Rackmount Server with 180W ATX P/S, 3 x Expansion slot

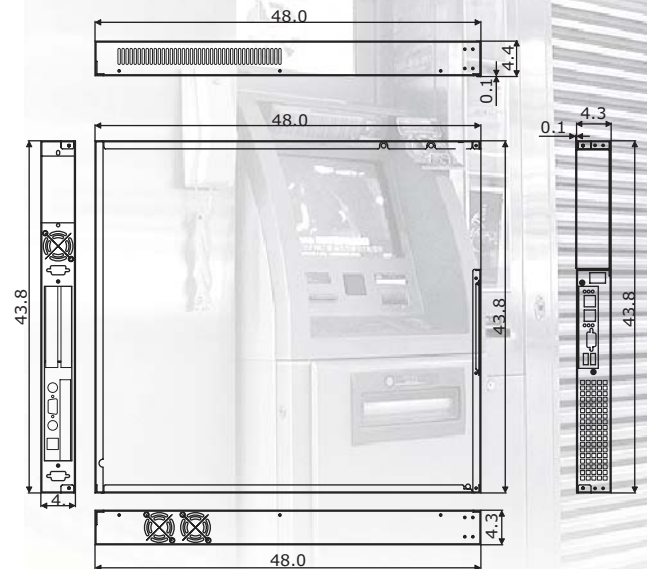

Features

- 1U high, rackmount server design
- Built-in HS-7005, HPCI-3SD B/P, 100~240V AC in 180W ATX P/S
- Provides Intel® Core™ 2 Duo Desktop/Pentium® 4/Celeron® D processor (option)
- 2 x Full-size and 1 x half-size PCI expansion slot
- 2 x 3.5" HDD space
- 5 x 4cm ball bearing cooling fan
- BBS-1200-W provides 3 x COM, 2 x USB2.0

System

SBC Model

HS-7005

CPU

Intel® Core™ 2 Duo Desktop/Pentium® 4/Celeron® D processor in the LGA775 package (option)

BIOS

AMI BIOS with 8Mb Flash EEPROM

System Chipset

Intel® Q965/ICH8-DO

System Memory

2 x 240-pin DIMM sockets up to 4GB DDR2 SDRAM

Display Chipset

Intel® Q965 integrated Intel® GMA 3000 Graphics

Ethernet Chipset

Dual Marvell 88E8053 10/100/1000 Mbps LAN

Drive Bay

2 x 3.5" HDD space

Watchdog Timer

Reset: 1 sec.~255 min. and 1 sec. or 1 min./step

Expansion

2 x Full-size and 1 x half-size PCI expansion slots

Backplane

HPCI-3SD backplane

Mechanical

Thermal System

5 x 4cm ball bearing cooling fan

Dimensions (LxHxW)

48.0 x 4.3 x 43.8 cm

Operation/Storage Temperature

0~+45 degrees C/-20~+70 degrees C

EMC

FCC/CE

Power Supply


100~240V AC in 180W ATX power supply

I/O Interface

External I/O

2 x USB2.0, 3 x COM, 2 x LAN

Rear I/O

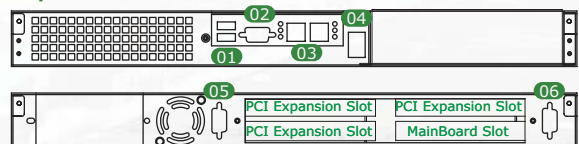

- | | |
|----------------|------------|
| 01. USB2.0 x 2 | 04. ON/OFF |
| 02. COM 1 | 05. COM 2 |
| 03. LAN x 2 | 06. COM 3 |

Ordering Guide

BBS-1200-W

1U High, Rackmount Server with HS-7005, HPCI-3SD B/P, 180W ATX P/S, I/O window for Dual LAN

Accessory Options

CPU, Memory Module, 3.5" HDD