



HS-2618

Intel® P-M/C-M/ULV C-M processor SBC w/CF, CRT/LVDS, TV-Out, LAN, Audio, PCI-104, 4 USB2.0

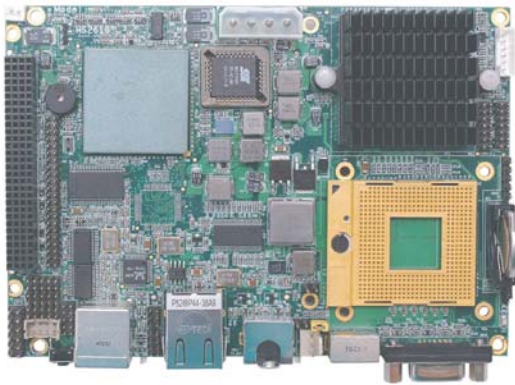

HS-2618

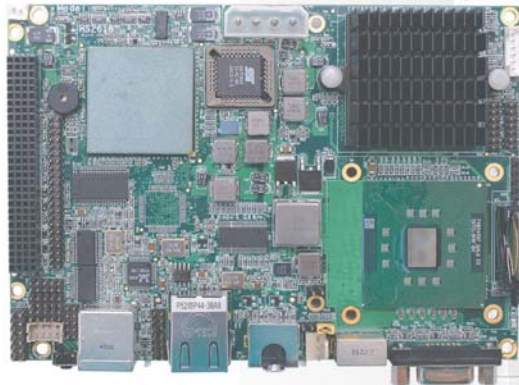

HS-2618M



Panel PC

Bare Bone

SBC

Chassis

Power Supply

Backplane

Features

- HS-2618 provides Intel® Pentium® M/Celeron® M processor 1.3~2.0GHz, supports 533/400MHz FSB
- HS-2618M provides ULV Intel® Celeron® M processor 600MHz/512K, supports 400MHz FSB
- 1 x SO-DIMM up to 1GB DDR SDRAM
- Intel® 852GM(E)/ICH4 system chipset
- Intel® 852GM(E) integrated VGA for CRT & LVDS
- Intel® 10/100 Mbps ethernet
- AC'97 audio codec
- Supports CF, 2 x COM, 4 x USB2.0, PCI-104
- Supports 18-bit LVDS, 8-bit I/O, TV-Out, Single +5V power in, H/W Monitor function

System

CPU

HS-2618 provides:

- Intel® Pentium® M processor 760 2.0GHz
- Intel® Pentium® M processor 745 1.8GHz
- Intel® Celeron® M processor 370 1.5GHz
- Intel® Celeron® M processor 320 1.3GHz

HS-2618M provides:

- ULV Intel® Celeron® M processor 600MHz/512K

FSB

- 533/400MHz FSB (HS-2618)
- 400MHz FSB (HS-2618M)

BIOS

Award PnP Flash BIOS

System Chipset

- Intel® 852GME/ICH4 (HS-2618)
- Intel® 852GM/ICH4 (HS-2618M)

I/O Chipset

Winbond W83627HG

System Memory

- 1 x 200-pin SO-DIMM socket DDR 333MHz up to 1GB (HS-2618)
- 1 x 200-pin SO-DIMM socket DDR 266MHz up to 1GB (HS-2618M)

Storage

1 x Type II CF socket

Watchdog Timer

Software programmable time-out intervals from 1~255 sec. or 1~255 min.

H/W Status Monitor

Monitoring temperatures, voltages, and cooling fan status

Expansion Interface

PCI-104

Power In

Single +5V power in

Operating Temperature

0~60 degrees C

Operating Humidity

0~95%, non-condensing

Size (L x W)

145 x 102 mm

I/O Interface

MIO

- 1 x RS-232
- 1 x RS-232/422/485
- 4 x USB2.0 (2 x internal, 2 x external)
- 1 x IDE
- 1 x PS/2 for KB/MS

DI/O

8-bit input/output by parallel port

Display

Chipset

- Intel® 852GME (HS-2618)
- Intel® 852GM (HS-2618M)

Display Memory

8MB video memory

LVDS

18-bit single/dual-channel

TV-Out

Provides PAL or NTSC TV systems

Resolution

CRT Mode: 1600 x 1200

Audio

Chipset

RealTek ALC202A

Audio Interface (w/pin header)

MIC In, Line Out

Ethernet

Chipset

Intel® 82562ET 10/100 Mbps LAN

Ethernet Interface

1 x RJ-45

Ordering Guide

HS-2618

Intel® Pentium® M/Celeron® M processor SBC w/CF, CRT, TV-Out, LAN, Audio, PCI-104

HS-2618M

ULV Intel® Celeron® M processor 600MHz/512K SBC w/CF, CRT, TV-Out, LAN, Audio, PCI-104

Accessory Options

LVDS Cable, COM Cable, USB Cable, H=23mm CPU Cooler