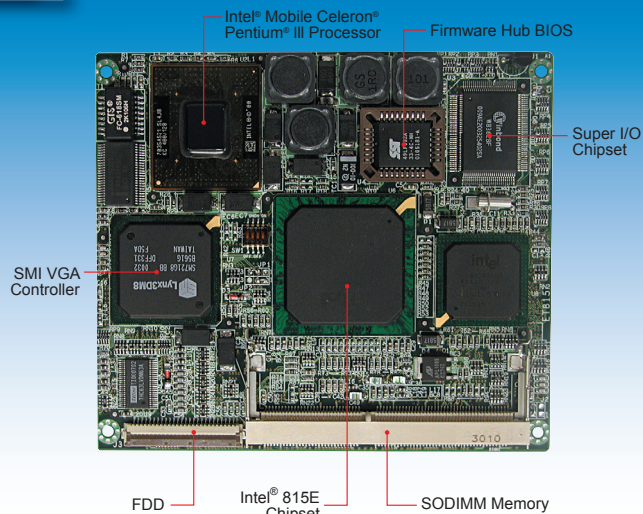


## 4

**ET815****Intel® Mobile Pentium® III ETX CPU Module w/ Intel® 815E Chipset****Features**

- Embedded Intel® Mobile Pentium® III / Celeron® processor 400MHz to 700MHz, 100/133MHz FSB
- SDR SO-DIMM x 1, max. 512MB
- SMI 722 VGA, 8MB, CRT/LVDS LCD
- Intel® 82801 built-in 10/100 BaseT Ethernet
- Watchdog timer, 4 x USB 1.1 ports

**System**

CPU	Intel® Mobile Pentium® III/Celeron®, up to 850MHz
System Memory	SDR SODIMM x 1, max. 512MB
System Chipset	Intel® 815E, 100MHz FSB
BIOS	Award 2Mbit
Watchdog Timer	256 levels
SSD	N/A
H/W Monitor	Yes
Expansion Slot	On baseboard

**Graphics**

VGA Controller	SMI SM722G8
VGA Memory	8MB embedded
LCD Interface	18-bit LVDS

**Ethernet**

LAN Controller	ICH2 integrated + 82562ET, 10/100Mbps
Connector	On baseboard

**Multi I/O**

Chipset	Winbond W83627HF 2x IDE (UDMA33/66/100), 1x FDD, 1x KB, 1x Mouse, 2x RS-232, 1x LPT
USB	4 ports (USB 1.1)
Audio	Built-in audio + AC97 codec
Others	IrDA

**Mechanical and Environmental**

Dimensions	100mm x 114mm (3.98" x 4.49")
Max. Power Requirement	+5V: 7A
Operating Temperature	0°C~60°C (32°F~140°F)
Storage Temperature	-20°C~80°C (-68°F~176°F)
Relative Humidity	10%~90% (non-condensing)

**Ordering Information**

ET815-400	Intel® Mobile Celeron® 400MHz 815E ETX CPU module w/ 8MB VGA and 10/100 LAN
ET815-500	Intel® Mobile Pentium® III 500MHz 815E ETX CPU module w/ 8MB VGA and 10/100 LAN
ET815-700	Intel® Mobile Pentium® III 700MHz 815E ETX CPU module w/ 8MB VGA and 10/100 LAN

CPU Cards **1**Disk-Size SBCs **2**Motherboards **3**ETX CPU Module **4**CompactPCI **5**PC/104 Plus **6**Firewall **7**ETX Baseboard & Backplane **8**MiniPCI MicroAGP & MicroPCI **9**