


GENE-LN05 Rev. B

3.5" SubCompact Board With Intel® Atom™ N455/ D525 Processor

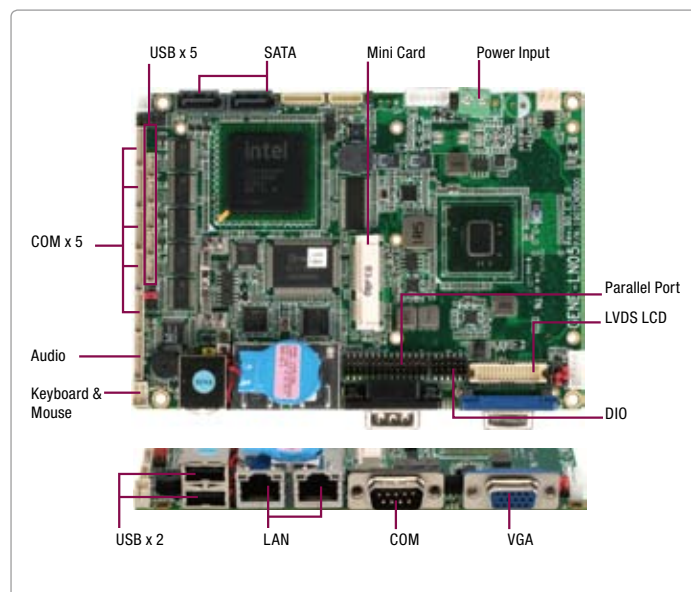

Features

- Intel® Atom™ N455/D525 Processor
- Intel® ICH8M
- DDR3 800 SODIMM, Max. 4 GB For Intel® Atom™ D525
- DDR3 800 SODIMM, Max. 2 GB For Intel® Atom™ N455
- Gigabit Ethernet x 2
- CRT, 18/24-bit Single Channel LVDS LCD
- 2CH HD Audio
- SATA 3.0Gb/s x 2 (Optional RAID 0 & 1), CompactFlash™ x 1
- USB2.0 x 7, COM x 6, Parallel x 1, 8-bit Digital I/O
- Onboard 4/5/8-wire Resistive Touch Screen Controller
- Mini Card x 1
- +12V or +5V (Optional)
- Onboard Trusted Platform Module (Optional)

Specifications

System	
Form Factor	3.5"
Processor	Intel® Atom™ N455/D525 1.8 GHz Processor
System Memory	204-pin DDR3 SODIMM x 1, Max. 4 GB (DDR3 800) for Intel® Atom™ D525 204-pin DDR3 SODIMM x 1, Max. 2 GB (DDR3 800) for Intel® Atom™ N455
Chipset	Intel® ICH8M
I/O Chipset	Nuvoton W83627DHG-P, Fintek F81216DG
Ethernet	Intel® 82567V & 82583V, 10/100/1000Base-TX, RJ-45 x 2
BIOS	AMI Plug & Play SPI BIOS - 2MB Flash
Wake on LAN	Yes
Watchdog Timer	Generates a time-out system reset
H/W Status Monitoring	Supports power supply voltages and temperature monitoring
Expansion Interface	Mini Card x 1, LPC bus
Trusted Platform Module (TPM)	Infineon SLB 9635 TT 1.2 (Optional)
Battery	Lithium battery
Power Requirement	+12V or +5V (optional), AT/ATX
Power Consumption (Typical)	Intel® Atom™ D525, DDR3 1GB 1.29A@+12V
Board Size	5.75"(L) x 4"(W) (146mm x 101.6mm)
Gross Weight	0.88lb (0.4kg)
Operating Temperature	32°F ~ 140°F (0°C ~ 60°C), -4°F ~ 158°F (-20°C ~ 70°C) for WITAS 1
Storage Temperature	-40°F ~ 176°F (-40°C ~ 80°C)
Operating Humidity	0% ~ 90% relative humidity, non-condensing
MTBF (Hours)	66,000
Display	
Chipset	Intel® N455/D525 integrated
Memory	Shared system memory up to 224MB/DVMT 4.0
Resolutions	Up to 1920 x 1440 for CRT (D525) Up to 1280 x 1024 for CRT (N455) Up to 1366 x 768 or 1280 x 800 for LCD
LCD Interface	18/24-bit single channel LVDS LCD
I/O	
Storage	SATA 3.0Gb/s x 2, CompactFlash™ x 1
Serial Port	RS-232 x 5, RS-232/422/485 (auto flow) x 1
Parallel Port	SPP/EPP/ECP x 1
Universal Serial Bus	USB2.0 x 7
PS/2 Port	Keyboard x 1, Mouse x 1
Digital I/O	Supports 8-bit (Programmable)
Audio	Line-in, Line-out, Mic-in
Touch Screen	Supports 4/5/8-wire resistive touch screen




Packing List

- Product CD
- GENE-LN05 Rev.B with Active Cooler (D525 Version) or with Passive Heatsink (N455 Version)

GENE-LN05 Rev. B

Dimension

Unit: mm

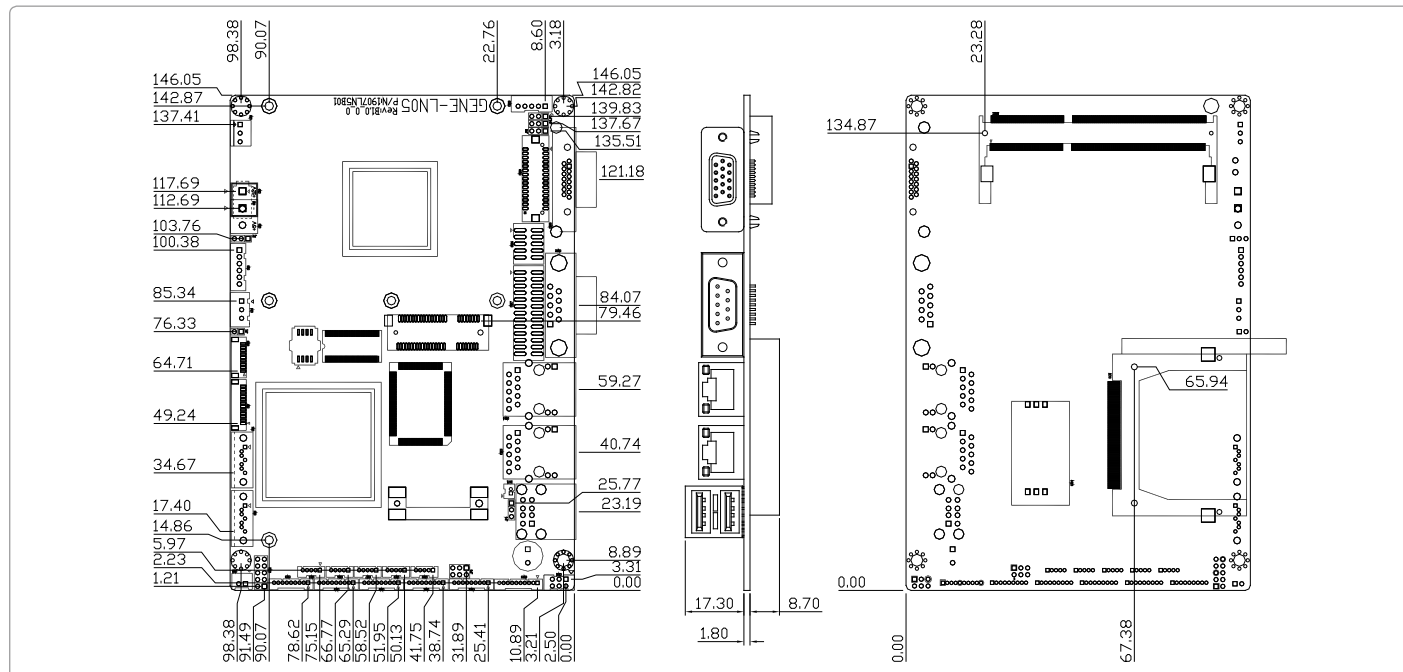

Ordering Information

Part Number	CPU	Fan/Fanless	Display	LVDS	Storage	LAN	USB	RS-232	RS-232/422/485	Expansion Slot	Power	Temp
TF-GENE-LN05-B10	Intel® Atom™ D525	Fan	CRT + LVDS	18/24b, 1CH	SATA x 2 CompactFlash™ x 1	GbE x 2	7	5	1	Mini Card x 1	+12V/ AT/ATX	0°C ~ 60°C
TF-GENE-LN05-B10-01	Intel® Atom™ N455	Fanless	CRT + LVDS	18/24b, 1CH	SATA x 2 CompactFlash™ x 1	GbE x 2	7	5	1	Mini Card x 1	+12V/ AT/ATX	0°C ~ 60°C
TF-GENE-LN05-B10-02	Intel® Atom™ N455	Fanless	CRT + LVDS	18/24b, 1CH	SATA x 2 CompactFlash™ x 1	GbE x 2	7	5	1	Mini Card x 1	+5V/ AT/ATX	0°C ~ 60°C
TF-GENE-LN05-B10-03	Intel® Atom™ D525	Fan	CRT + LVDS	18/24b, 1CH	SATA x 2 CompactFlash™ x 1	GbE x 2	7	5	1	Mini Card x 1	+5V/ AT/ATX	0°C ~ 60°C
TF-GENE-LN05W1-B10-01	Intel® Atom™ N455	Fanless	CRT + LVDS	18/24b, 1CH	SATA x 2 CompactFlash™ x 1	GbE x 2	7	5	1	Mini Card x 1	+12V/ AT/ATX	WITAS1 (-20°C ~ 70°C)
TF-GENE-LN05W2-B10-01	Intel® Atom™ N455	Fanless	CRT + LVDS	18/24b, 1CH	SATA x 2 CompactFlash™ x 1	GbE x 2	7	5	1	Mini Card x 1	+12V/ AT/ATX	WITAS2 (-40°C ~ 85°C)

Optional Accessories

- **1700050207**
USB Cable, Length 20cm
- **1701090150**
COM Port Cable, Length 15cm
- **1709100254**
Audio Cable, Length 25cm
- **1709070500**
SATA Cable, Length 50cm
- **1701260200**
Parallel Port Cable, Length 20cm
- **1702002010**
Big Single Row 4-pin Power Input Cable for +12V Input, Length 10cm
- **1702150155**
Power Cable for 2.5" SATA Hard Disk, Length 15cm
- **170220020B**
Conversion Cable ATX Power Supply, Length 20cm
- **170204010P**
Big Single Row 4-pin Power Input Cable for +5V Input, Length 10cm
- **1700060157**
KB/Mouse Cable