


COM-965W1

COM Express CPU Module With Onboard Intel® Core™ 2 Duo L7500 (1.6 GHz) Processor

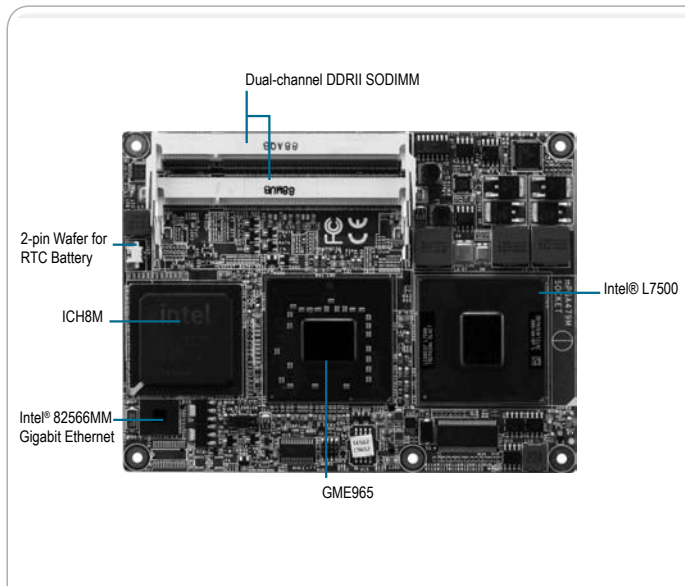

Features

- Onboard Intel® Core™ 2 Duo L7500 (1.6 GHz) Processor
- Intel® GME965 + ICH8M
- Dual-channel DDRII 533/667 Memory, Max. 4 GB
- Gigabit Ethernet
- CRT, Up to 24-bit Dual-channel LVDS LCD, TV
- High Definition Audio Interface
- PATA x 1/ SATA II x 3
- USB2.0 x 8
- PCI x 4, PCI-Express [x16] x 1, PCI-Express [x1] x 5
- DC Input, +12V
- COM Express Basic Module Pin-out Type II
- Operating Temperature: -20°C ~ 70°C



Specifications

System	
Form Factor	COM Express basic module, Pin-out Type II
Processor	Intel® Core™ 2 Duo L7500 (1.6 GHz) processor
System Memory	200-pin DDRII SODIMM x 2, Max. 4 GB (DDRII 533/667), supports dual-channel function
Chipset	Intel® GME965 + ICH8M
I/O Chipset	ICH8M
Ethernet	Intel® 82566MM, 10/100/1000Base-TX
TPM	v1.2, Infineon SLB9635TT1.2
BIOS	AWARD BIOS v6.0 SPI type, 2 MB ROM
EEPROM	Atmel AT24C02, save BIOS and configuration data (Optional)
Wake on LAN	Yes
Watchdog Timer	Fintek F75111
H/W Status Monitoring	Supports CPU temperature monitoring
Expansion Interface	PCI-Express [x16] x 1 (Shared with 2 SDVO ports) PCI-Express [x1] x 5 32-bit PCI x 4 LPC bus x 1 SMBus x 1 I2C x 1
Power Requirement	DC input, +12V 2-pin wafer for RTC battery
Power Consumption (Typical)	—
Board Size	4.92"(L) x 3.74"(W) (125mm x 95mm)
Gross Weight	0.66 lb (0.3 Kg)
Operating Temperature	-4°F ~ 158°F (-20°C ~ 70°C)
Storage Temperature	-40°F ~ 176°F (-40°C ~ 80°C)
Operating Humidity	0% ~ 90% relative humidity, non-condensing
MTBF (Hours)	—
Display	
Supports	CRT/LCD, CRT/TV, LCD/TV simultaneous/ dual view displays
Chipset	Intel® GME965 integrated
Memory	Shared system memory up to 384 MB/ DVMT 4.0
Resolution	Up to 2048 x 1536 (QXGA) @ 60 Hz for CRT Up to 2048 x 1536 (QXGA) for LCD
LCD Interface	Up to 24-bit dual-channel LVDS
SDVO/ DVO/ Side Port	Supports SDVO x 2 (Shared with PCI-Express [x16])
TV-out	Intel® GME965 integrated, supports NTSC/ PAL/ HDTV HDTV supports: 480p/720p/1080i/1080p Supports Composite Video, S-Video, Component Video (YPbPr) on carrier board
I/O	
Storage	PATA x 1 (Two devices) SATA II x 3
USB	USB 2.0 x 8
Audio	High definition audio
GPIO	Up to 4 in or 4 out

Packing List

- M2.5 Screw x 5
- Utility CD
- COM-965W1

Ordering Information

- **TF-COM-965W1-A10**
COM Express CPU Module, Intel® Core™ 2 Duo L7500, Dual DDRII, Gigabit Ethernet, USB 2.0, PCB=2.0mm, Rev.A1.0, WITAS 1

Optional Accessories

- **TF-ECB-916M-A10-01**
COM Express Carrier Board, microATX, 2 Gigabit Ethernet, 7.1CH Audio, 4 COM, USB, PCI-Express, ATX, Rev.A1.0
- **TF-PER-A052**
CPU Cooler, For COM-965/COM-45SP, Onboard CPU, 12V Fan
- **TF-PER-A066**
Heat Spreader Kit, For COM-965/COM-45SP, Onboard CPU