

URLS10

10-Pair IDC Terminal Block

Key Features

- No tools required for pair-at-a-time ActCap connections
- IDC termination on all connections for fast, easy termination and jumpering with no wire stripping
- Sealant-filled connectors on the URLS10S provide moisture resistance and longer-life termination for environmentally-challenging installations
- Half-tap capability permits multiple appearances of jumper wire
- Continuity and directional testers provide more complete testing of the circuit
- Variety of frame pair counts and sizes for maximum application and installation flexibility
- Compact size makes URLS ideal for applications where space is limited
- Available installed in cross-connect and building entrance terminals to fit a variety of applications
- UL Listed and CE Marked for documented performance and safety compliance
- CAT5e certified for improved transmission performance

Description

The CAT5e certified URLS10 is an indoor/outdoor 10-pair terminal block for connecting solid copper communications wire. All connections are IDC (insulation displacement connection), made without removing the insulation from the wire. The contact terminals slice through the insulation and create a gas-tight contact at the copper/terminal interface.

Two models are available – the URLS10 for indoor installations, and the sealant-filled URLS10S for use in outdoor or environmentally-challenging installations. Both models are assembled from two primary components – a URLS connector module and a URLS base.

The connector module contains metallic contacts that provide electrical and test connections. Located on the top of the connector module, ten ActCaps guide single-pair cable into proper terminating position, connecting the cable pair to the metallic contacts. Wires are then terminated by pressing down on the ActCap, requiring only a push of the installer's thumb. The ActCaps can terminate 20- through 26-gauge (.4 to .8 mm) conductors. Test results verify that ActCaps can terminate 24-gauge wire more than 250 times with stable, low contact resistance.

The base can terminate 22 through 26-gauge (.4 to .6 mm) conductors. Up to 10 pairs from the incoming cable stub can be terminated on the base using an available termination tool. Wires are cut to the proper length during the termination process. Tools are available for either ten-pair-at-a-time (URLSFIXTURE) or single-wire termination (URLSTOOL1). The single-wire termination tool is perfect for low pair count installations, cable repair, and maintenance.

URLS blocks are molded from glass-filled Valox for long-term performance. Electrical terminals are fabricated from tin-plated phosphor bronze for low contact resistance. The sealant used in the URLS10S protects against corrosion caused by high humidity and salt in street-side and coastal installations.

URLS blocks can be mounted to industry-standard 4.12-in. (10.4 cm) wide mounting frames in a variety of pair counts. Close-pitch frames are available for higher terminal density. Rod mount kits are also available.

Application

These blocks can be used in a variety of indoor and outdoor distribution, cross-connect, and building entrance applications. The URLS10 is designed for copper wire terminals and cross connect systems throughout the communications network. It is ideal for use in outdoor remote electronic equipment enclosures with limited space for wire termination.



URLS10 10-Pair IDC Terminal Block

Figure 1: URLS Block


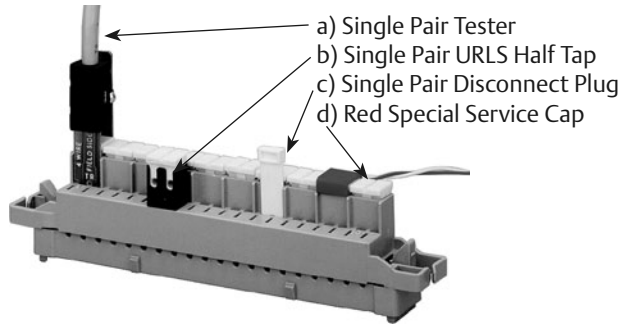


Figure 2: Connector Module and Base

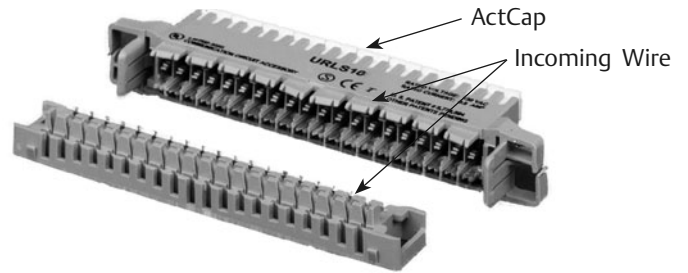

Ordering Information & Dimensions

Catalog Number	Part Number	Description	H	W	D
URLS10	F800799	10-pair URLS IDC terminal block	31.75mm (1.25-in.)	129.29mm (5.09-in.)	16.51mm (0.65-in.)
URLS10S	F800800	10-pair URLS IDC terminal block w/sealant	31.75mm (1.25-in.)	129.29mm (5.09-in.)	16.51mm (0.65-in.)

NOTE: Dimensions with base assembly installed.

Accessories

Catalog Number	Part Number	Description	Fig.
URLS1TEST1M	F800801	Single-pair (continuity-bridge) tester w/one-meter test cord 2 wire # 6 Ring term (Fig. 2)	1a
URLS2TEST1M	F800802	Single-pair break tester w/one meter test cord 4 wire # 6 Ring term (Fig. 2)	1a
URLSHALFTAP	F800804	Single-pair URLS half-tap, 10/pkg. (Fig. 2)	1b
URLSHALFTAP10S	F800572	Single-pair URLS half-tap with sealant, 10/pkg. (Fig. 2)	1b
URLSDISCLUG1	F800803	Single-pair disconnect plug, 100/pkg. (Fig. 2)	1c
URLSDISCLUG10	F596092	10-pair disconnect plug 10/pkg.	1c
URLSTOOL1	F1001087	Single-wire incoming cable grooming and terminating tool	
URLS10TERMFM	F800569	10-pair incoming frame mount cable grooming and terminating tool	
RLSBBIDENT1800B	F017865	Pair identification plugs for 1-1800 pairs (Blue)	
RLSBBIDENT1800G	F017866	Pair identification plugs for 1-1800 pairs (Green)	
RLSFRAME50	F607095	Metal frame for mounting up to five URLS 10-pair blocks (50 pair)	
RLSFRAME60	F017809	Metal frame for mounting up to six URLS 10-pair blocks (60 pair)	
URLS10TERMRM	F1002830	10-pair feeder termination tool rod mount	
URLSCAPRED	F800568	Special service caps (Red) 100/pkg.	1d

NOTE: Rear mounted protection cartridge for overvoltage protection available soon. Contact customer service.

Emerson Network Power.

The global leader in enabling Business-Critical Continuity™.

- AC Power
- Embedded Power
- Precision Cooling
- Connectivity
- Infrastructure Management & Monitoring
- Racks & Integrated Cabinets
- DC Power
- Outside Plant
- Services
- Embedded Computing
- Power Switching & Controls
- Surge Protection

Emerson Network Power Energy Systems
 4350 Weaver Parkway, Warrenville, IL 60555
 Toll Free: 800-800-1280 (USA and Canada)
 Telephone: 440-246-6999 Fax: 440-246-4876
 Web: EmersonNetworkPower.com/OSP

© 2009 Emerson Network Power Energy Systems, North America, Inc. All rights reserved.
 Emerson®, Emerson Network Power™, Business-Critical Continuity™, NetReach™, NetSpan™ and NetXtend™ are trademarks of Emerson Electric Co. and/or one of its subsidiaries.
 Printed in USA

