
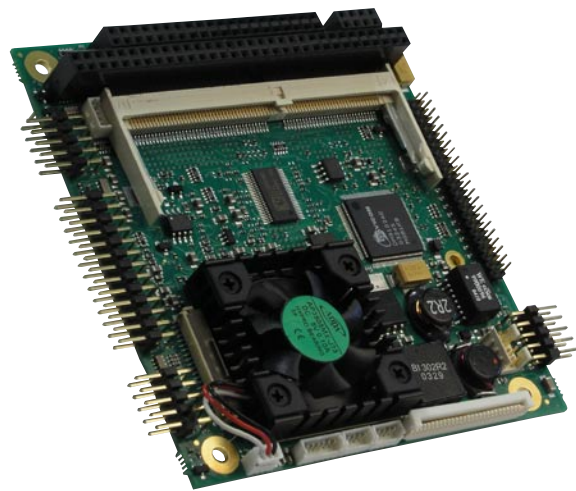


➤ MOPSlcdVE

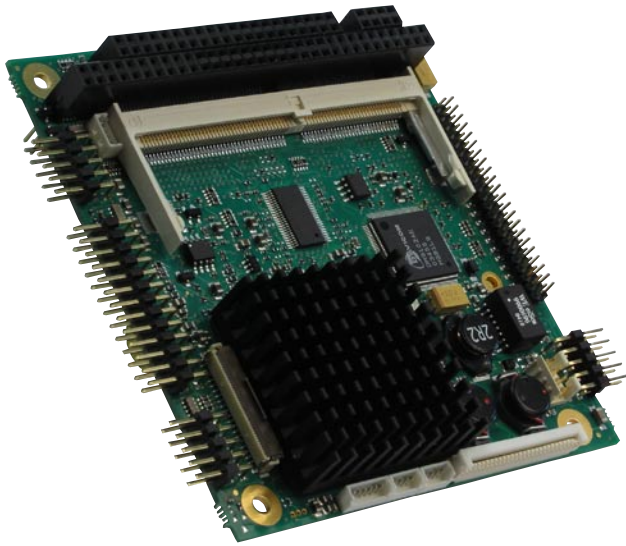

VIA Eden Embedded System Platform

- VIA Eden™ family from 300 to 1000 MHz
- classic PC/104
- onboard Graphics and Communication
- Best price / performance ratio

Product Overview

MOPSlcdVE with the new VIA Eden™ processor. Equipped with the low power consuming but performing VIA Eden™ processors @ 300MHz (fanless) or 600MHz (fan) or even with 1.0 GHz. The 66/133MHz FSB enhance the boards performance.

Up to 512 MByte SDRAM-SODIMM are mountable via standard SDRAM-SODIMM socket.

The VIA Twister™T on-chip graphic features besides S3 Savage 4 engine, up to 32 MByte VRAM (UMA) as well as the JILI-Interface for instant LCD-Panel Adaptation.

The board comes complete 2 x USB, 2 x COM, LPT, FDD, EIDE, Keyboard and PS/2.

All MOPS PC/104 boards are Plug&Work compatible, which considerably reduces the time to market.

All MOPS PC/104 provide the same pinout for keyboard, COM1 and COM2, 44pin IDE, 2xUSB, LPT as well as LAN. This is the common MOPS-family feature, which eases the upgradeability enormously within the Kontron MOPS PC/104-products.

With Kontron You stay...always a Jump ahead!

Technical Data

- **Full PC/104 compliant Industry Standard**
- **CPU:**
 - VIA Eden™ 300 MHz (Fanless), 66MHz FSB
 - VIA Eden™ 600 MHz (Fan), 133MHz FSB
 - VIA Eden™ 1.0 GHz (Fan), 133MHz FSB
- **Chipset:** VIA TwisterT
- **SDRAM:** SODIMM socket for up to 512 Mbyte
- **Graphic:** S3 Savage 4 engine on-chip, JILI
- **VRAM:** up to 32 MB VRAM UMA
- **Panel / CRT** ✓ / ✓
- **10/100 BaseT Ethernet** ✓
- **USB** 2x, with Legacy support
- **EIDE interface** ✓
- **Floppy Interface** ✓
- **Printer Interface** ✓
- **Keyboard/Mouse Controller** ✓ / ✓
- **RS232C** 2x
- **LANBoot** ✓
- **DarkBoot** ✓
- **Watchdog** ✓
- **Real Time Clock** ✓
- **Dimensions:** 96x90 mm (3.8 x 3.6")
- **Power supply:** 5V only
- **Plug'n Play compatible to all other MOPS and therefore exchangeable**
- **Temperature:**
 - Operation: please see Manual
 - Storage: -10° to 85°C
- **Max. humidity:**
 - Operation: 10% to 90%
 - Storage: 5% to 95% (non condensing)

Article	Part.-No.	Description
MOPSlcdVE	01032-0000-30-1	VIA Eden™ processor with 300MHz, passive cooling
MOPSlcdVE	01032-0000-60-1	VIA Eden™ processor with 600MHz, active cooling
MOPSlcdVE	01032-0000-10-1	VIA Eden™ processor with 1000MHz, active cooling
	common features:	VIA Twister™T chipset, VGA/LCD on-chip with up to 32 MB VRAM UMA, JILI (LVDS) Interface, one SODIMM-SDRAM-socket for up to 512 MB, 2xRS232C, LPT, FDC, EIDE, Kb/mouse, 2xUSB and 10/100 Base-T Ethernet.

Corporate Offices

US/ Canada
6260 Sequence Drive
San Diego, CA 92121-4371

Tel.: +1 (0) 888 677-0877
Fax: +1 (0) 858 677-0898

sales@us.kontron.com

Europe, Middle East & Africa
Oskar-von-Miller-Str. 1
85386 Eching/Munich - Germany

Tel.: +49 (0) 8165 77 0
Fax: +49 (0) 8165 77 219

sales-kem@kontron.com

Asia Pacific
5F-1, 341, Sec 4, Chung Hsiao E.
Rd, Taipei, Taiwan

Tel: +886 2 2781 5791
Fax: +886 2 2741 7379

sales@kontron-asia.com

Kontron Embedded Modules GmbH
Brunnwiesenstr. 16
DE-94469 Deggendorf
0800-saleskontron
(0800-7253756)

