


2.16 PSB / 2.17 StarFabric Processor Blade

cPB-4311

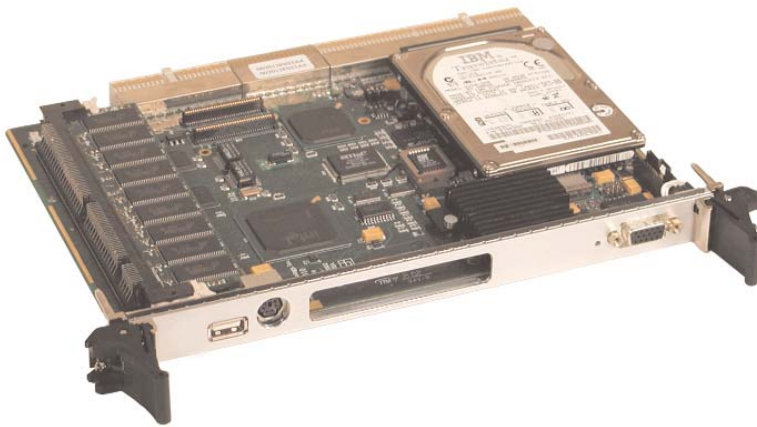

- Intel® 700MHz Pentium®III Processor-M, 256KB L2 cache
- Intel®440GX Chipset with 100MHz FSB
- Up to 512MB ECC SDRAM
- PCI Video with 2MB SDRAM
- Two Fast Ethernet Interfaces and PMC Site
- Two StarFabric Links
- Optional Onboard 2.5" Ultra DMA/33 EIDE Drive
- 6U x 4HP, Operates in System or Peripheral Slots
- PICMG® 2.16, 2.17, and 2.1 R2.0 Compliant

Diversified Technology's low cost cPB-4311 CompactPCI® processor blade, compliant with the PICMG® 2.16 packet switched backplane (PSB), 2.17 StarFabric, and hot-swap open standards, addresses the low cost, low power processing needs of Internet, telecom and industrial control applications.

The cPB-4311 comes with a low power, 700MHz Intel® Pentium®III processor with 256KB L2 cache, 440GX chipset with 100MHz front side bus, and up to 512MB ECC SDRAM. Onboard are two 10/100Mbps/sec Ethernet auto-negotiating controllers, optional Ultra DMA/33 IDE hard drive, 32-bit/33MHz PMC site, PS/2 keyboard and mouse interfaces, Universal Serial Bus (USB), serial and parallel ports, floppy interface and a SVGA CRT controller. A StarGen SG2010 bridge provides links to dual StarFabric meshes whereas the two Ethernet controllers provide the links to the 2.16 PSB. An IDE-compatible CompactFlash™ carrier is available on the optional cRT-4311 rear I/O transition module.

The cPB-4311 does not have a PCI bridge to the CompactPCI backplane. As such, it can be used in either system or peripheral slots of a CompactPCI platform. The cPB-4311 supports being hot-swapped and automatically performs proper operating system shutdown upon opening of the ejector latch (requires ACPI compliant operating system).

Part of DTI's PlexSys family of CompactPCI PSB products, the cPB-4311 operates in PICMG 2.16-compliant systems. Also included are a system monitor (voltages and CPU/board temperature) and a 2-year limited warranty.

Low cost and standards-based, Diversified Technology's cPB-4311 system/peripheral processor blade is the unique choice for application developers addressing embedded clustering and media gateway markets.



 **Diversified
Technology**
An Ergon Co.

www.dtims.com • sales@dtims.com • 1.800.443.2667

SPECIFICATIONS

CPU / Cache

- Intel Low Power (BGA2) Pentium III at 700MHz
- 32KB internal L1 cache; 256KB 64-bit on-die L2 Cache
- Intel 440GX Chipset

Bus Interface

- 100MHz Front Side Bus
- Supports onboard 32-bit/33MHz PMC card

Memory

- One 168-pin right-angled socket for up to 512MB registered PC100 ECC SDRAM

Data Path

- 64-bit/100MHz on CPU and memory bus
- 32-bit/33MHz on onboard PCI bus
- StarGen SG2010 dual mesh StarFabric bridge

Flash Memory

- 4Mb (512KB) Sector Flash for BIOS field upgrade

Peripherals & I/O Interface

- Optional 2.5" EIDE drive mounted on board
- Optional CompactFlash Type II drive carrier on rear I/O module
- 32-bit/33MHz IEEE P1386.1 PMC socket
- Hot Swap LED on front panel

I/O Interface	Front Panel	Rear Panel
COM 1	N/A	J3
COM 2	N/A	J4
LPT 1	N/A	J4
USB 0	N/A	J4
USB 1	4-pin USB	N/A
SVGA	15-pin D-shell	N/A
PS/2 K/M	6-pin combo	J4
Primary EIDE	2.5" HD (50-pin)	N/A
Ethernet A	N/A	J3
Ethernet B	N/A	J3
Secondary EIDE	N/A	J4

* Note: J4 is not available if cPB-4311 is to be used in H.110 slot.

Clock / Calendar

- Real-time clock with 256 byte battery backup CMOS RAM

Supervisory

- System monitor (LM87): voltages, CPU/board temperatures

Interoperability

- Validated to operate in PICMG 2.16-compliant and 2.17-compliant system platforms
- DTI's cSB-4240 24-port level 2/3 Ethernet Switch Blade
- 3rd party CompactPCI PSB products

OS Compatibility

- General: Windows® 2000/XP/NT; Red Hat/MontaVista™ Linux®; Solaris™ 7/8; UnixWare® 2.1.1/7.1.1; QNX®

BIOS

- Phoenix core; PCI 2.1, ACPI Rev 1.0b and SMBIOS 2.3 compliant
- Serial console redirection, peripheral enable/disable, quick/multi- boot, PXE 2.0 boot from ROM
- Software enable/disable of onboard Ethernet, 2.17 link disable
- Legacy USB support
- Advanced thermal management

Mechanical

- 9.2" x 6.3" x 0.8" (233.35 mm x 160 mm x 20.32 mm)
- 6U x 4HP
- Conforms to PICMG 2.0 R3.0 (Core), 2.1 R2.0 (Hot Swap), 2.16 R1.0 (PSB), and 2.17 R1.0 (StarFabric) Specifications

Power Requirements

Input Power	24W	
ICC typ. *	+5V	3.0A
	+12V	10mA
	+3.3V	2.6A

*Measured with 700MHz CPU and 512MB memory

Environmental

Operating

- Temperature: 0° to 50°C / 32° to 122°F
- Humidity (RNC): 5 to 95% @ 40°C / 104°F
- Altitude: 4,572m / 15,000ft
- Shock: TBD
- Vibration: TBD

Storage and Transit (w/HD)

- Temperature: -40° to +65°C / -40° to 149°F
- Humidity (RNC): 0 to 95% @ 40°C / 104°F
- Altitude: 15,240m / 50,000ft
- Shock: TBD
- Vibration: TBD

Reliability & Serviceability

- MTBF: 14.6 years
- MTTR: 3 minutes, plus system startup (hot swap system)
- SMBIOS serial number
- 2 year limited warranty

Regulatory Compliance (currently pending)

- CE Certification
- Safety: UL/cUL 60950; EN/IEC 60950; CB Report Scheme CB Certificate and Report
- EMC/EMI: FCC 47 CFR Part 15, Subpart B, Class A; EN55022, EN50081-1/CISPR22; EN55024

Ordering Information

cPB-4311/700

2.16 Processor Blade with 700MHz Pentium III processor

cPB-4311/700-T

2.16/2.17 Processor Blade with 700MHz Pentium III processor without J4 connector

Options

- cRT-4311P 6U x 4HP Rear I/O Transition Module for PSB backplanes
- cRT-4311 6U x 4HP Rear I/O Transition Module for non-PSB backplanes
- PC100 ECC SDRAM
- 2.5" EIDE HD
- CompactFlash media
- Cables



All products are shipped FOB factory (MS).
Specifications subject to change without notice.
Trademarks are the property of their respective owners.

(C) Copyright 2003 by Diversified Technology.
All rights reserved.

For more information or to order, please contact us.