


# SBC84400

486 Embedded SBC with Fast Ethernet and 4 COM

3

*Embedded Computing Platforms*

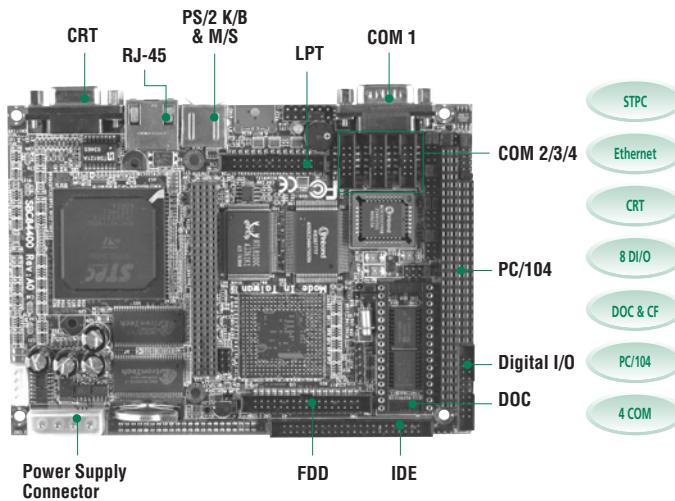

## *Features*



The Microsoft Windows CE logo consists of the word "Windows" in its signature font, with "CE" in a smaller font to the right. A circular icon containing a stylized globe or flag is positioned above the "Windows" text.



- ▶ Low power fanless STPC Consumer II
  - ▶ 4 COM ports for various applications
  - ▶ DiskOnChip® and CompactFlash™
  - ▶ PCI104 and PC/104 expansion
  - ▶ +5V only single voltage DC-in supported

## *System*

CPU	STPC Consumer II, 133MHz
System Memory	1 x 144-pin SODIM max. up to 128MB Onboard SDRAM 32MB
Chipset	STPC Consumer II embedded
BIOS	Phoenix-Award 2Mbit with RPL/PXE LAN Boot ROM, SmartView and Customer CMOS Backup
SSD	CompactFlash™ Type-II socket and DiskOnChip®
Watchdog Timer	System reset and NMI; 64 levels, 0.5~8/ 5~80/ 50~800/ 100~1600 seconds
Expansion Interface	PC/104 for ISA expansion; optional PCI104 interface
Battery	Lithium 3V/196 mAH
Size	146 x 104mm
Temperature	0~60°C, operation
Operation Humidity	10% ~ 95% relative humidity, non-condensing

## *Packing List*

## Quick installation guide

Manual, driver, utility CD & cables (1 x 44-pin IDE, 1 x 34-pin FDD, 1 x mini DIN-to-KB + MS, 3 x COM port, 1 x printer)

### *Ordering Information*

## Standard

SBC84400VE 486 SBC with CRT, Fast Ethernet and 4 COM ports

10

MIO	1 x EIDE, 1 x FDD, 1 x PS/2 K/B, 1 x PS/2 MS, 4 x COM (3 x RS-232, 1 x RS-232/422/485), 1 x LPT, 1 x IrDA
Ethernet	Realtek RTL8100C Fast Ethernet controllers

## *Display*

Chipset	Integrated in STPC Consumer II
Memory Size	1/2/4MB frame buffer sharing system memory
Resolution	CRT mode: 1280 x 1024 @ 8bpp, 1024 x 768 @ 8bpp

