


# AR-M9927

Micro Box

Network Security-Firewall/VPN

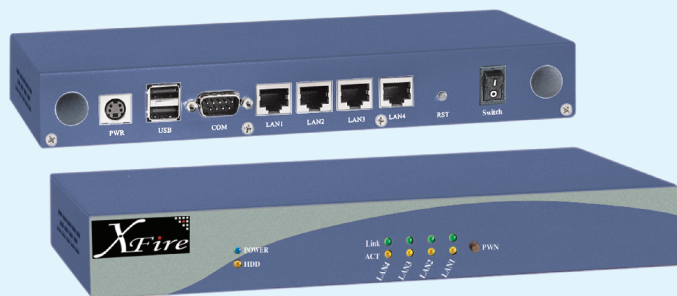

Xfire.acrosser.com.tw

## Features

Fanless Internet Security Platform with Intel ULV Celeron CPU, 4LANs, Compact Flash, Mini PCI, USB

Fanless

Intel ULV

2 USB

4 LAN

CF

Mini PCI

HDD Bay

## Specification

### System:

CPU	Intel ULV (Celeron)
Speed	400 MHz/650 MHz
L2 Cache	256K
Chipset	VIA 8601A VT82C686B
BIOS	AMI

### Memory:

RAM	PC-133 SDRAM
Max. Capacity	Supports up to 512MB
Socket	144-Pin SO-DIMM

### Ethernet:

Interface	10/100Mbps Base-T
Controller	NS 83816 x 4
Connector	RJ-45 x 4

### Drive Bay:

2.5" HDD	1 (Option)
----------	------------

### I/O Interface:

USB	2 (USB 1.1 Compliant)
Serial	2 x RS232 ( 1xDB9 Connector, 1 Internal)
Mini PCI Interface	1 (3.3V Mini PCI connector, Internal)
VGA interface	1 (5 x 2 pin header connector, Internal)
PS/2	2 (Mouse x 1, Keyboard x 1, Internal)
GPIO	1 (TTL 8-bit Input and Output)

### Management:

Indicator	1xPower LED, 8 LEDs for Network connector as ACT and Link
-----------	---

### Miscellaneous:

Control	Power Switch
Solid State Disk	1 (Compact Flash Type I)
Watchdog Timer	Software Programmable 1~63 Seconds
RTC	On Chipset, supports ACPI function

### Environment:

Operating Temperature	0 ~ 40°C (32 ~ 104 °F)
Storage Temperature	-20 ~ 80°C(-4 ~ 176 °F)
Operating Humidity	0 ~ 90% Relative humidity non-condensing
Power Requirement	27W External Power Adaptor

### Physical:

Dimension (W x D x H)	242mm x 148.5mm x 34mm (9.5" x 5.8" x 1.3")
-----------------------	---

## Ordering Information

### Standard:

AR-M9927	Fanless Internet Security Platform with Intel ULV Celeron CPU ,4LANs, Compact Flash, Mini PCI, USB
----------	--

### Optional:

190030213	HDD Cable
190030158-01	VGA Cable
190030195	Keyboard/Mouse Cable

Specifications are subject to change without notice.