


» KTA55/pITX «

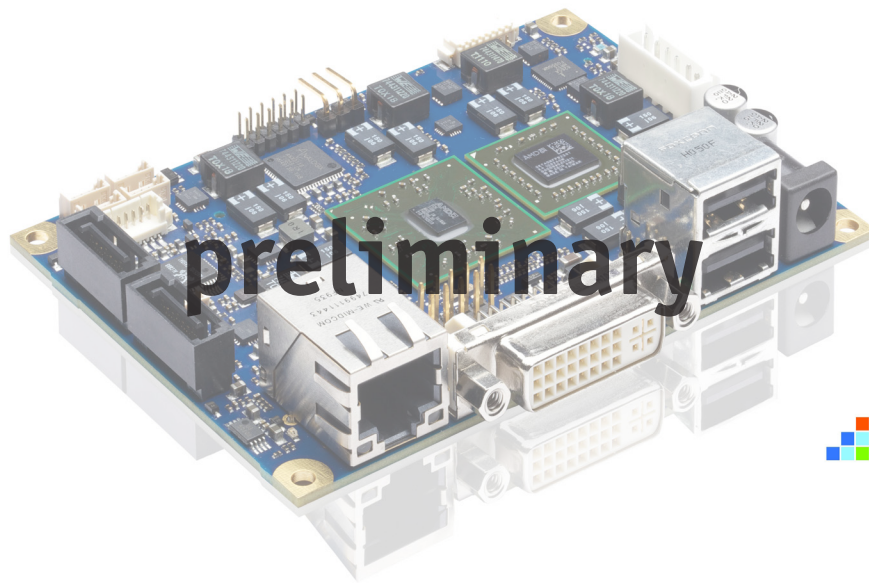

Ultrasmall 2.5" SBC with AMD FUSION Technology

- » Superior DX11 graphics
- » DVI-I & 24-bit LVDS
- » 6 x USB 2.0, 2 x SATA, GBit Ethernet
- » Bootable micro SD Card Slot
- » Standard KT PICO-ITX cooling concept
- » Lockable DC Power Connector
- » Longterm available up to 7 years

KTA55/pITX

Ultrasmall 2.5" SBC with AMD FUSION Technology



Technical Information

Processor	1.0 GHz dual core T40N
Chipset	AMD A55E
Memory	Support for DDR3 unbuffered SODIMM Module up to 4GB
Ethernet	Ethernet 10/100/1000Mbit
Graphics	DVI and VGA output on DVI-I connector, 2 x 24 Bit LVDS, dual independent display support
USB	6 x USB ports
Mass Storage	2 x SATA connector incl. RAID-support Bootable Micro SD Card Slot
Special Features	TPM 1.2 Backlight Output selectable 5V or 12V
I/O Features	8 Configurable GPIO
Temperature	Operating 0°C - 60°C (32°F ~140°F)
Power Supply	5V only power supply Internal & external power connector available NEW: Lockable DC Power Connector
Dimensions	100 x 72 mm (Pico-ITX)

Ordering Information

Article	Part.-No.	Description
KTA55/pITX	03003-0000-10-0	2.5" Pico-ITX SBC with AMD Fusion APU

CORPORATE OFFICES

Europe, Middle East & Africa

Oskar-von-Miller-Str. 1
85386 Eching/Munich
Germany
Tel.: +49 (0)8165/ 77 777
Fax: +49 (0)8165/ 77 279
info@kontron.com

North America

14118 Stowe Drive
Poway, CA 92064-7147
USA
Tel.: +1 888 294 4558
Fax: +1 858 677 0898
info@us.kontron.com

Asia Pacific

17 Building,Block #1,ABP.
188 Southern West 4th Ring Road
Beijing 100070, P.R.China
Tel.: + 86 10 63751188
Fax: + 86 10 83682438
info@kontron.cn