

## 2U Type N+1 Redundant Power Supply

# EFRP-2463/2553

EPS2U

**460+460 watts Output Power**  
**550+550 watts Output Power**  
**N+1 Redundant Configuration**  
**Meet 2U Rack Mount System**



Dimensions: 101(W) x 84(H) x 300(D) mm

### Features:

- ⦿ Compact size Module Design
- ⦿ Quick Removable Application
- ⦿ Active Power Factor Correction
- ⦿ Universal Power Input
- ⦿ Current Sharing on +5V, +3.3V and +12V
- ⦿ Remote DC Sense on +5V, +3.3V
- ⦿ Front panel LED to Indicate Power Status
- ⦿ Power Fault Alarm Signals
- ⦿ Over Voltage Protection
- ⦿ Over Current Protection
- ⦿ Over Power Protection
- ⦿ Short Circuit Protection
- ⦿ MTBF >100,000 Hours

### General Specifications:

- ⦿ Input Range: 100 to 240 VAC, ±10%(for EFRP-2463)  
110 to 240 VAC, ±10%(for EFRP-2553)
- ⦿ Power Factor: 0.98 minimum
- ⦿ Efficiency: 65% minimum, at full load
- ⦿ Hold up Time: 20mS minimum
- ⦿ PSON (Remote ON/OFF): TTL compatible
- ⦿ Power Good: 200 to 500 ms, TTL compatible
- ⦿ Cooling Fan: 38x38x28 mm
- ⦿ Operating Temperature: 0 to 50 °C (for EFRP-2463)  
0 to 40 °C (for EFRP-2553)
- ⦿ Operating Humidity: 20 to 90 %

### Agency Requirements:

- ⦿ Harmonic: Meet EN61000-3-2
- ⦿ EMI/RFI: CE, FCC class B
- ⦿ Safety: UL, cUL, TUV, CB

### Electrical Specifications: Regulation, Ripple & Noise:

Output	+5V	+3.3V	+12V	--	-12V	5Vsb
Load Regulation	+5/-4 %	+5/-3 %	+5/-4 %	--	± 5%	± 5%
Cross Regulation	+5/-4 %	+5/-3 %	+5/-4 %	--	± 5%	± 5%
Line Regulation	± 1%	± 1%	± 1%	--	± 1%	± 1%
Ripple & Noise	50mV	50mV	120mV	--	120mV	50mV

### Input and Output Ratings:

Voltage	Input				Load	Output				
	Frequency	Current	Watt			+5V	+3.3V	+12V	-5V	-12V
100 - 240 VAC	47-63 Hz	8A max	460W	Max Load	30A	28A	35A	--	0.8A	2A
				Min Load	3A	1A	1A	--	0A	0A
110 - 240 VAC	47-63 Hz	8A max	550W	Max Load	30A	28A	35A	--	0.8A	2A
				Min Load	3A	1A	1A	--	0A	0A

Note: 1. The +5 & +3.3 Volt combine total output shall not exceed 200W


2. The +5, +3.3 and +12 Volt combine total output shall not exceed 440W (for EFRP-2463) and 530W(for EFRP-2553).

3: Noise bandwidth is from DC to 20 MHz.

**2U Type N+1 Redundant Power Supply**

**EFRP-2463**

**Dimensions (Unit: mm):**

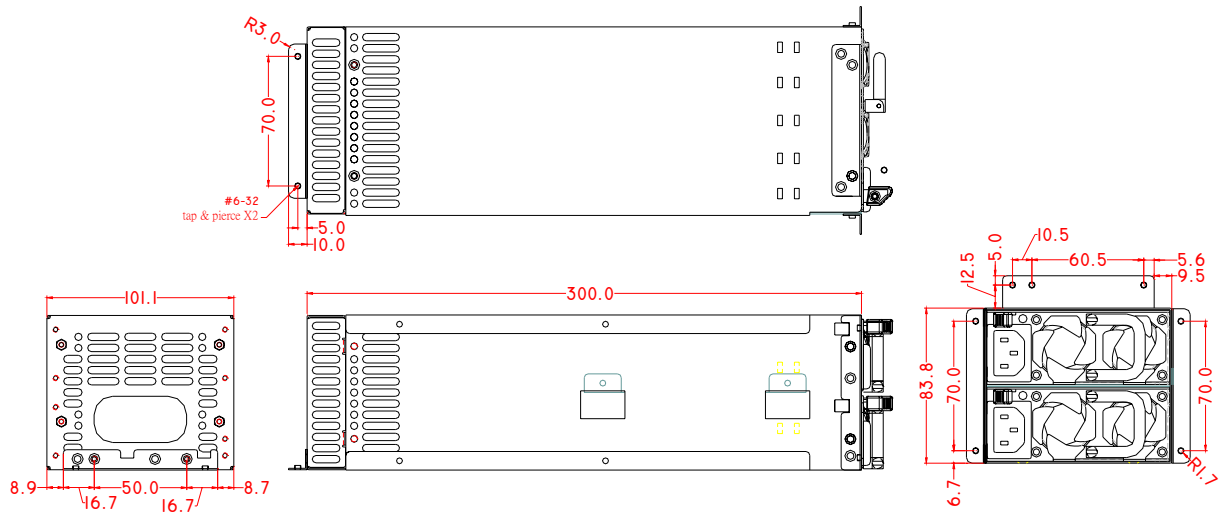

Rev: 1.2 May. 29, 03