


Open Frame Power Supply

EOFP- 200-24

200W Output Power
Open Frame Configuration

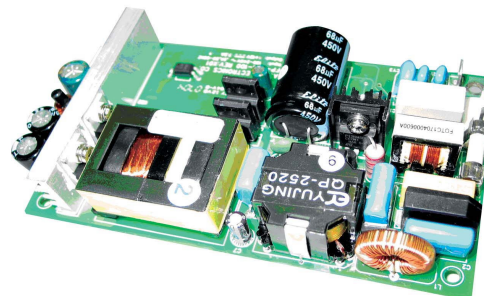

Dimension:152.4(W) x40(H) x 101.6(D) mm

Features:

- ⦿ Quick Removable Application
- ⦿ Active Power Factor Correction
- ⦿ Universal Power Input
- ⦿ Current Sharing on 24V
- ⦿ Over Voltage Protection
- ⦿ Over Current Protection
- ⦿ Over Power Protection
- ⦿ Short Circuit Protection
- ⦿ MTBF >100,000 Hours

General Specifications:

- ⦿ Input Range: 110 to 240 VAC
- ⦿ Power Factor: 0.95 minimum
- ⦿ Efficiency: 80% minimum, at full load
- ⦿ Hold up Time: 20mS minimum, at full load
- ⦿ Operating Temperature: 0 to 40 °C
- ⦿ Operating Humidity: 20 to 90 %

Agency Requirements:

- ⦿ Harmonic: Meet EN61000-3-2
- ⦿ EMI/RFI: CE, FCC class B

Electrical Specifications:

Regulation, Ripple & Noise:

Output	+24V
Load Regulation	5%
Cross Regulation	5%
Line Regulation	± 1%
Ripple & Noise	240mV

Input and Output Ratings:

Voltage	Input			Watt	Output	
	Frequency	Current	Load		+24V	
110 - 240 VAC	47-63 Hz	4-2A	200W	Max Load	8.33A	
				Min Load	0A	