
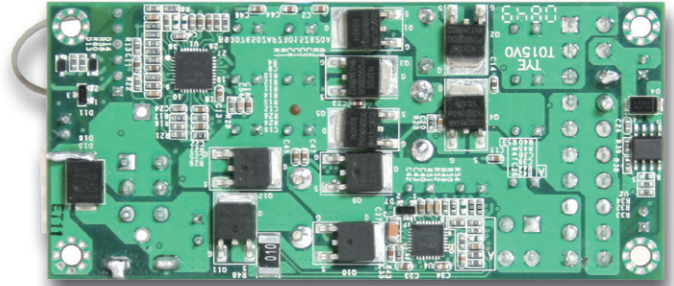


GADIWA-3161

160W DC/DC 9V~29V/wide-input,
6V~9V workable with derating 160W
ATX/output, Board Type Converter

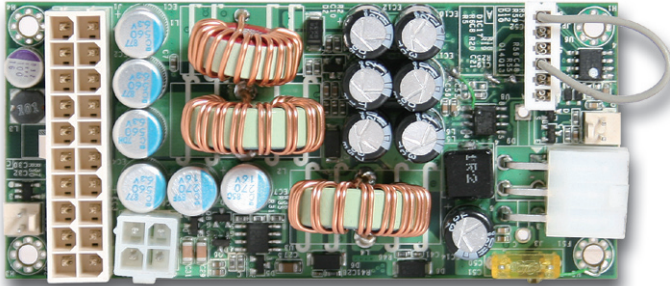

FEATURES

- 9~29V/Wide-input, plug into the ATX connector with board output
- Compact and user-friendly design for installation and maintenance
- Fan-less design for mission-critical application
- Small size for 1U or higher system to save space

SPECIFICATION

Input Voltage	9V~29V, 6~9V workable with derating
Line Regulation	9V~29V/input
Max Output	160Watts @ 14V input
Efficiency	>80% @ 9V input @ 140W output
Input Connector	Mini-Fit 6 pin (P/N: B6902430)
Output Connector	- Mini-Fit 20 pin (P/N: B6902410) - 12V output cable (P/N: B6902420)
Dimension (WxDxH)	100 x 45 x 22.5 mm

CHARACTERISTICS

Output Voltage	Load Regulation	Cross Regulation
+12V	0~7.4A	7.4A
+5V	0~8A	8A
+3.3V	0~9A	9A
+5Vsb	0~2A	2A
-12V	0~0.1A	0.1A

ORDERING GUIDE

- **GADIWA-3161**
160W DC/DC 9V~29V/wide-input, ATX/output, Board Type Converter

Installation Image

