


» JRexplus-DC «

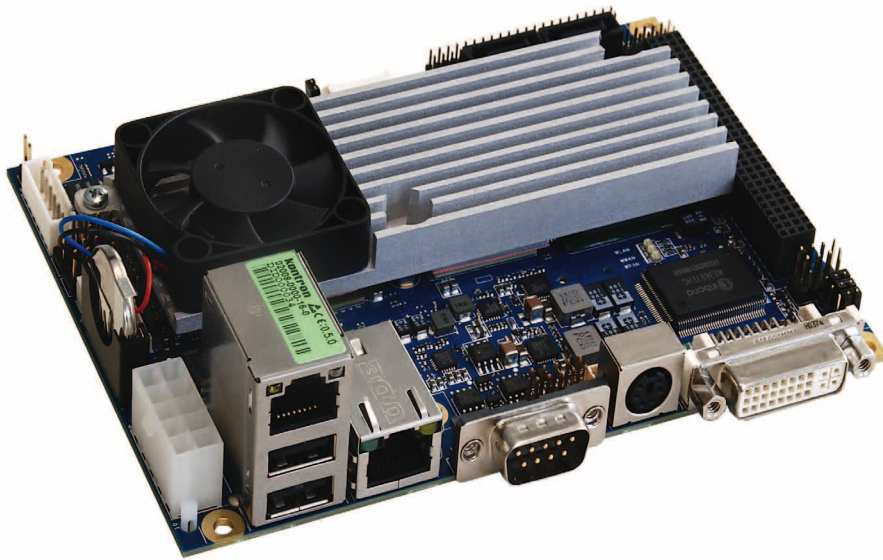

3.5" embedded line


3.5" SBC with Intel® Atom™ N270 processor

- » PCI-104 compatible expansion interface
- » Intel® 945GSE, Intel® ICH7M Chipset
- » Up to 2 GByte DDR2 SDRAM
- » 6x USB2.0, Dual LAN, Dual SATA and PATA 44
- » Low power consumption with latest energy saving 45nm technology

Technical Information

Processor / CPU Clock	Intel® Atom™ N270 processor 1.6 GHz / FSB 533 MHz
Chipset	Intel® 945GSE, Intel® ICH7M
Audio Controller	HD Audio
BIOS	AMIBIOS®
Cache	L2: 1 x 512 KByte
Compliance	PCI-104™ bus compatible expansion interface (PCI), miniPCIe, RoHS compliant
Cooling	passive / active depending on application
Dimensions (H x W x D)	102 x 147 mm, 3,5"
Ethernet	1 x 10/100, 1 x 10/100/1000
Graphic	Integrated with Intel® GMA950 (DirectX® 9, PS 2.0), shared memory CRT/DVI, 18Bit Dual Channel LVDS (JILI30)
Hard Disk	2 x SATA *, 1 x PATA 44 * (EIDE (UDMA-100))
Interfaces	1 x DSUB RS232 *, 1 x RS232 internal *, CompactFlash™ Card Socket
Memory	DDR2-SODIMM up to 2 GByte
Power Supply / Management	ATX power supply / 5V DC only
Special Features	TPM 1.2 *, 4bit GPIO *
Temperature	Operating: 0° C – 60° C / Storage: tbd (Ask about extended temperature ranges)
USB	6 x USB 2.0 (2 on front panel, 4 internal *)

* Optional, depending on product variants

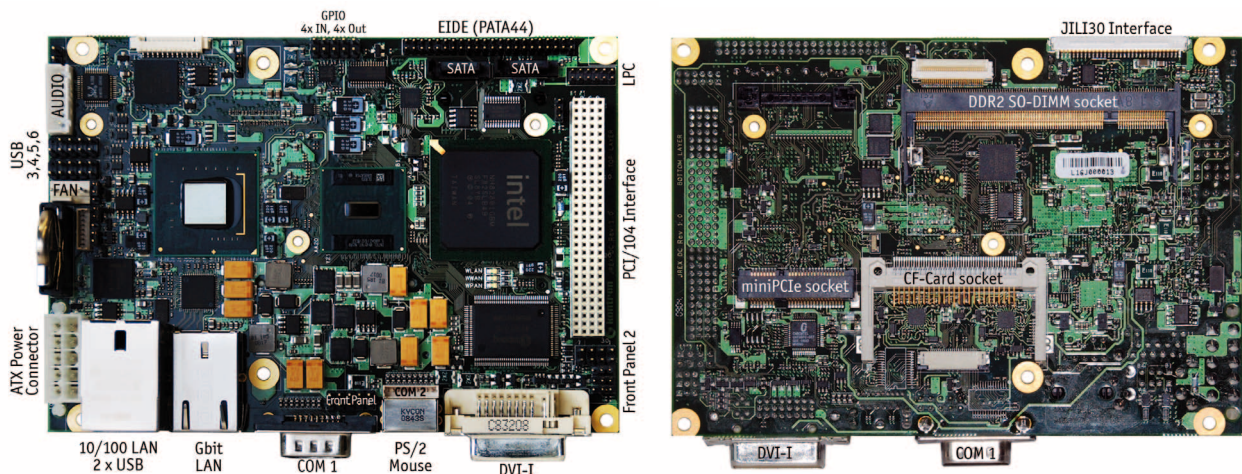

Ordering Information

Article	Part.-No.	Description
JRexplus-DC plus	02008-0000-16-0	JRexplus-DC - 3.5" SBC with Intel® Atom™ N270 1.6 GHz, Chipset i945GSE + ICH7M, DVI-I, 2x 18Bit LVDS Interface JILI30, 2xCOM, 1x LPT, 10/100 Mbit LAN, 10/100/1000Mbit LAN, 6xUSB, HD Audio, EIDE 44pin, MiniPCIe, TPM, PCI/104+ interface, DDR2-SODIMM-socket up to 2Gbyte, Compact-Flash socket, ATX power supply
JRexplus-DC plus Starterkit	02108-0000-00-5	JRexplus-DC plus Starterkit , 3.5" SBC with PCI-104 interface, Intel® Atom™ N270 processor, PATA44, 2x SATA, LPT, 2x LAN, CRT/DVI, JILI30 LVDS interface, Backlight support, 4Bit GPIO, TPM 1.2, 2x RS232 interface, 6x USB, CF-CARD-Socket, MiniPCIe, ATX power supply, incl. JRexplus-DC plus 1.6 GHz, 1GB DDR2 RAM, cables & accessories, packed in plastic case

CORPORATE OFFICES

Europe, Middle East & Africa

Oskar-von-Miller-Str. 1
85386 Eching/Munich
Germany
Tel.: +49 (0)8165/ 77 777
Fax: +49 (0)8165/ 77 279
info@kontron.com

North America

14118 Stowe Drive
Poway, CA 92064-7147
USA
Tel.: +1 888 294 4558
Fax: +1 858 677 0898
info@us.kontron.com

Asia Pacific

17 Building, Block #1, ABP.
188 Southern West 4th Ring Road
Beijing 100070, P.R.China
Tel.: + 86 10 63751188
Fax: + 86 10 83682438
info@kontron.cn



#JRexplus-DC# 02232011PPL
All data is for information purposes only and not guaranteed for legal purposes. Subject to change without notice. Information in this datasheet has been carefully checked and is believed to be accurate; however, no responsibility is assumed for inaccuracies. All brand or product names are trademarks or registered trademarks of their respective owners.