


# BBS-2013

Fanless, Box PC with VIA V4 Eden 1GHz CPU, CF, 12V DC Adapter

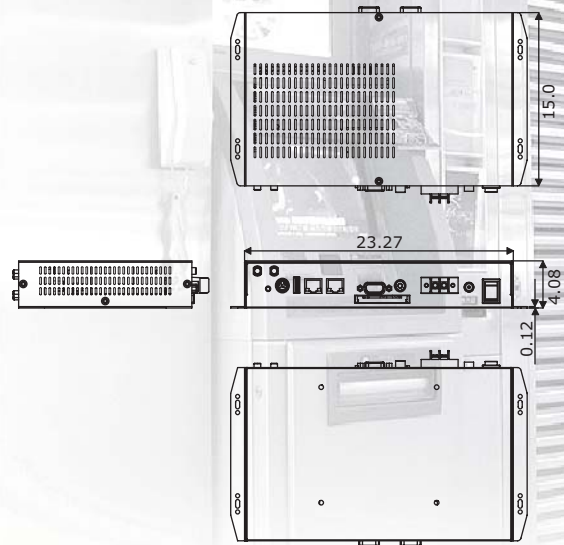

## Features

- Fanless, box PC design
- Built-in HS-2613+VIA V4 Eden 1GHz CPU, 12V DC adapter
- 1 x 2.5" HDD space
- BBS-2013-Y provides CF, 4 x COM, 5 x USB2.0, TV-Out

## System

### SBC Model

HS-2613

### CPU

VIA V4 Eden 1GHz CPU

### BIOS

Award PnP Flash BIOS

### System Chipset

VIA CX700(M)

### System Memory

1 x 200-pin SO-DIMM socket up to 1GB DDR2 SDRAM

### Display Chipset

VIA CX700(M)

### Audio Chipset

VIA VT1708A

### Ethernet Chipset

Dual RealTek RTL8100C 10/100 Mbps LAN

### Drive Bay

1 x 2.5" HDD space

### Storage

1 x Type II CF socket

### Watchdog Timer

Software programmable time-out intervals from 1~255 sec. or 1~255 min.

## Mechanical

### Dimensions (LxHxW)

23.27 x 4.08 x 15.0 cm

### Operation/Storage Temperature

0~+45 degrees C/-20~+70 degrees C

### EMC

FCC/CE

### Power Adapter


12V DC in 60W adapter or +10~+30V DC power in

## I/O Interface

### External I/O

MIC In, Line Out, PS/2 KB/MS, 5 x USB2.0, 2 x LAN, VGA, TV-Out, CF, 4 x COM

### Rear I/O

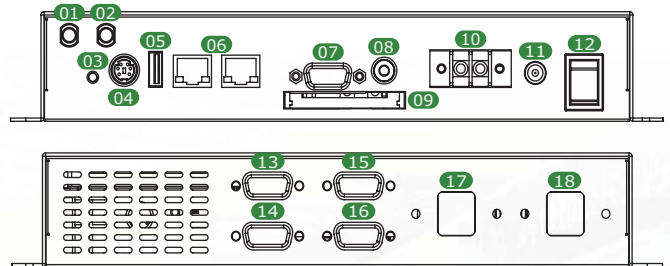

- |                  |                       |                |
|------------------|-----------------------|----------------|
| 01. MIC In       | 07. VGA               | 13. COM 1      |
| 02. Line Out     | 08. TV-Out            | 14. COM 2      |
| 03. Reset Button | 09. CF                | 15. COM 3      |
| 04. KB/MS        | 10. DC Adapter In     | 16. COM 4      |
| 05. USB2.0       | 11. +10~+30V DC In    | 17. USB2.0 * 2 |
| 06. LAN * 2      | 12. Main Power ON/OFF | 18. USB2.0 * 2 |

## Ordering Guide

### BBS-2013-Y

Fanless, Box PC with HS-2613(w/1GHz CPU, CF), 12V DC Adapter

### Accessory Options

Memory Module, CF Module, 2.5" HDD