

New



# Series NMV

Electronic timers suitable for use in industrial automation, commercial and residential applications

**The new electronic timers series NMV, are particularly suitable to be employed in all industrial fields, as well as residential and commercial applications.**

- Standard 22.5 mm width modules cover the complete range.
- Mounting: DIN-rail or base mounting (with screws).  
Cost saving ease of installation.
- Improved timing accuracy.  
Time bands up to 100 hours duration.  
Selectable for star-delta commutation times of 50 ms or 100 ms.
- Time delay adjustment by means of a potentiometer enabling quick and accurate adjustment.
- LED status indication.  
Confirms supply availability and contact operational condition.
- All devices have 1 or 2 changeover contacts and a thermal current of 6A (Ith).




# Series NMV

## Time setting

The DIP switches on the front of the device are to select the appropriate time range for the application.  
The function of the DIP switch is indicated in the product instruction sheet supplied with the device.

### Example

Adjust the time setting dial on the front of the timer to the required time.  
In this example, 0 to 6 seconds and 10 to 60 seconds.




Range: 6 - 60 seconds



0 to 6 seconds  
10 to 60 seconds

## Identification

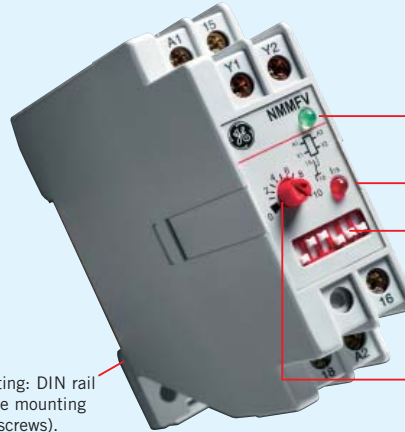

Indication and diagnostic LED. Status indication of the contact and of the power supply.

Timing range up to 100 hours.  
For start-delta timer selectable changeover time at 50 ms or 100 ms.

Mounting: DIN rail or base mounting (with screws).

Setting of the time delay is by a setting dial allowing quick and accurate adjustment.

## Order codes


Description	Supply voltage	Time range	Contacts	Art. No.	Ref. No.		
Delayed ON relay	direct 24-240V AC/DC	0.06 sec.-6000 min.	1 changeover	NMTCV	124900		
	with transformer 110/125V	0.06 sec.-6000 min.	2 changeover	NMTCV2	124901		
	with transformer 200/240V		1 changeover	NMTCVTAJ	124902		
Delayed ON relay with instantaneous contact	with transformer 380/440V	0.06 sec.-6000 min.	1 contact timed+ 1 contact inst.	NMTCVTAM	124903		
	direct 24-240V AC/DC			NMTCVTAU	124904		
				NMTCIV	124905		
Delayed ON relay with thyristor output timer	direct 24-240V AC/DC	0.2-500 sec.	thyristor output	NMTCSV	124906		
Impulse ON timer	direct 24-240V AC/DC	0.06 sec.-6000 min.	1 changeover	NMICV	124907		
Star-delta starter relay	direct 24-240V AC/DC	1-60 sec.	2 timed	NMETV	124908		
				with transformer 110/125V	NMETVTAJ	124909	
				with transformer 200/240V	NMETVTAM	124910	
	with transformer 380/440V	0.5-6 sec.	1 changeover	NMETVTAU	124911		
				50-600 sec.	2 changeover	NMRDV-6	124912
						NMRDV-60	124913
	NMRDV-600	124914					
	with transformer 110/125V	0.5-6 sec.	1 changeover	NMRDV2-6	124915		
				50-600 sec.	2 changeover	NMRDV2-60	124916
						NMRDV2-600	124917
	with transformer 200/240V	0.5-6 sec.	1 changeover			NMRDV2-6AJ	124918
				50-600 sec.	1 changeover	NMRDVT-60AJ	124921
NMRDVT-600AJ						124924	
with transformer 380/440V	0.5-6 sec.	1 changeover	NMRDVT-6AM			124919	
			50-600 sec.	1 changeover	NMRDVT-60AM	124922	
					NMRDVT-600AM	124925	
with transformer 110/125V	0.5-6 sec.	1 changeover			NMRDVT-6AU	124920	
			50-600 sec.	1 changeover	NMRDVT-60AU	124923	
					NMRDVT-600AU	124926	
Delayed OFF timer through contact timer	direct 24-240V AC/DC	0.06 sec.-6000 min.			1 changeover	NMTDV	124927
Symmetric intermittance	direct 24-240V AC/DC	0.6 sec.-6000 min.	1 changeover	NMIFV	124928		
Asymmetric intermittance started by connection	direct 24-240V AC/DC	0.6 sec.-6000 min.	1 changeover	NMIVV	124929		
Multifunction or pause (selectable)	direct 24-240V AC/DC	0.06 sec.-6000 min.	1 changeover	NMMFV	124930		
	with transformer 110/125V	0.06 sec.-6000 min.	1 changeover	NMMFVT2AJ*	124931		
	with transformer 200/240V			NMMFVT3AM*	124932		
	with transformer 380/440V			NMMFVT4AU*	124933		

\* Module 45 mm

GE Power Controls  
International Sales  
Nieuwevaart 51  
B-9000 Gent - Belgium  
Tel. +32/9 265 21 11  
Fax +32/9 265 28 90  
E-mail: [gepcbel@gepc.ge.com](mailto:gepcbel@gepc.ge.com)  
[www.gepowercontrols.com](http://www.gepowercontrols.com)

GE Power Controls  
Hornhouse Lane  
Knowsley Industrial Park  
Liverpool L33 7YQ  
Tel. 0870 600 4372  
Fax 0151 549 4545  
E-mail: [gepcuk@gepc.ge.com](mailto:gepcuk@gepc.ge.com)  
[www.gepowercontrols.com](http://www.gepowercontrols.com)

## Dimensions

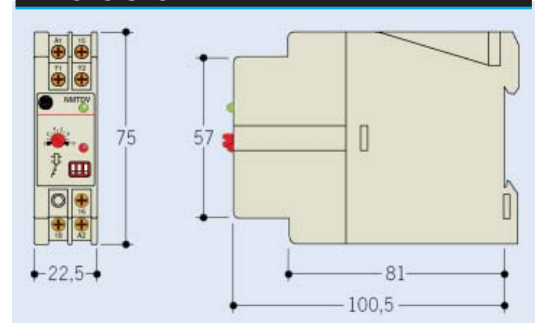

GE imagination at work