

# WS-855A


## 15" TFT LCD 10-Slot Industrial Workstation




Analog VGA Input

OSD (On Screen Display)

Touch Pad with two buttons

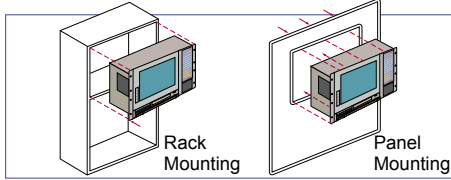

### Dimensions



The smart design makes maintenance a much easier job.

### SPECIFICATIONS

- ◆ 19" Rack mount, 8U height industrial workstation
- ◆ Aluminum front panel
- ◆ 15" TFT LCD Display Module with OSD function
  - Resolution: 1024x768
  - Brightness: 250 cd/m<sup>2</sup>
  - LCD MTBF: 50000hrs
  - Backlight MTBF: 30000hrs
  - Interface: Analog VGA input with OSD (on screen display)
- ◆ Membrane Keypad (59 keys) and Touch Pad (with two buttons)
- ◆ Drive Bays: 5.25" CDROM x 1, Internal 3.5" HDD x 1, 3.5" FDD x 1
- ◆ Front panel support one USB, one PS/2 connector and power switch
- ◆ Equipped with ACE-832AP 300W ATX with PFC Power Supply
- ◆ Backplane: 10-Slot full size,
  - PCI-10S, IP-10S, PCI-10S2, PCIAGP-9S2, PXAGP-9S
- ◆ One 12cm ball bearing cooling fan with filter
- ◆ Optional touch screen with RS-232 interface
- ◆ Operation temperature: 0-50°C
- ◆ Relative Humidity: 5-95%, non-condensing.
- ◆ Vibration: 5~17 Hz, 0.1" double amplitude displacement  
17~640 Hz, 1.5G acceleration peak to peak.
- ◆ Shock: 10G acceleration peak to peak. (11ms)
- ◆ Color: White (PANTONE 413C)
- ◆ Dimension: 483(W) x 354(H) x 265(D) mm
- ◆ Net/GW: 16/20 (kg)

### ORDERING INFORMATION


- **WS-855AW-R2/ACE-832AP** :8U 10-slot 15" TFT LCD workstation with ACE-832AP 300W ATX with PFC power supply

#### Optional Touch Screen:

- T-C151 3M Micro Touch Capacitive touch screen
- T-R151B 3M Micro Touch Resistive touch screen

# WS-612A

## 10.4" TFT LCD 8-Slot Industrial Workstation

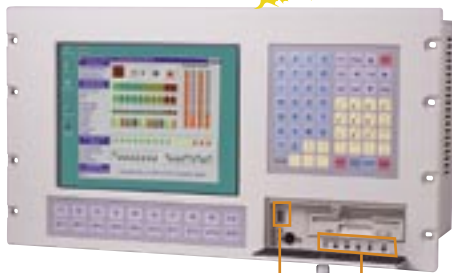


Analog VGA Input

USB port

OSD (on Screen Display)

### Dimensions

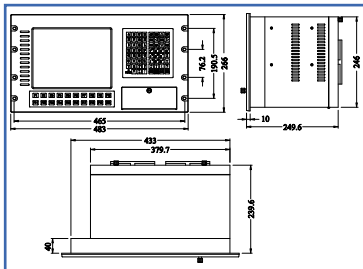

The smart design makes maintenance a much easier job

### SPECIFICATIONS

- ◆ 19" Rack mount 6U height industrial workstations
- ◆ Aluminum front panel
- ◆ 10.4" TFT LCD Display module with OSD function
  - Resolution: 800 x 600
  - Brightness: 250 cd/m<sup>2</sup>
  - LCD MTBF: 50,000hrs
  - Backlight MTBF: 25,000hrs
  - Interface: Analog VGA input with OSD (on screen display)
- ◆ Membrane Keypad: 63 keys & 20 function keys
- ◆ Drive bays: One FDD and one 3.5" HDD drive bay
- ◆ Supports ACE-723 series power supply
- ◆ Front panel support one USB connector
- ◆ Supports backplane: BP-8S, PCI-7S, IP-7S, PCIAGP-6S
- ◆ Equipped with two 12cm cooling fans
- ◆ Optional 3M Micro Touch resistive touch screen with RS-232 interface
- ◆ Operation temperature : 0~50°C
- ◆ Relative Humidity: 5-95%, non-condensing
- ◆ Vibration: 5~17 Hz, 0.1 double amplitude displacement  
17~640Hz 1.5G acceleration peak to peak
- ◆ Shock: 10G acceleration peak to peak (11ms)
- ◆ Color: White (PANTONE 413C)
- ◆ Dimensions: 483(W) x 266(H) x 249.6(D) mm
- ◆ Net/GW: 12/16 (kg)

### ORDERING INFORMATION

- **WS-612AW/ACE-723A**: 6U 8-Slot TFT LCD workstation with ACE-723A Power supply

**Optional:** T-R104B 3M Micro Touch Resistive Touch Screen