


# RISC

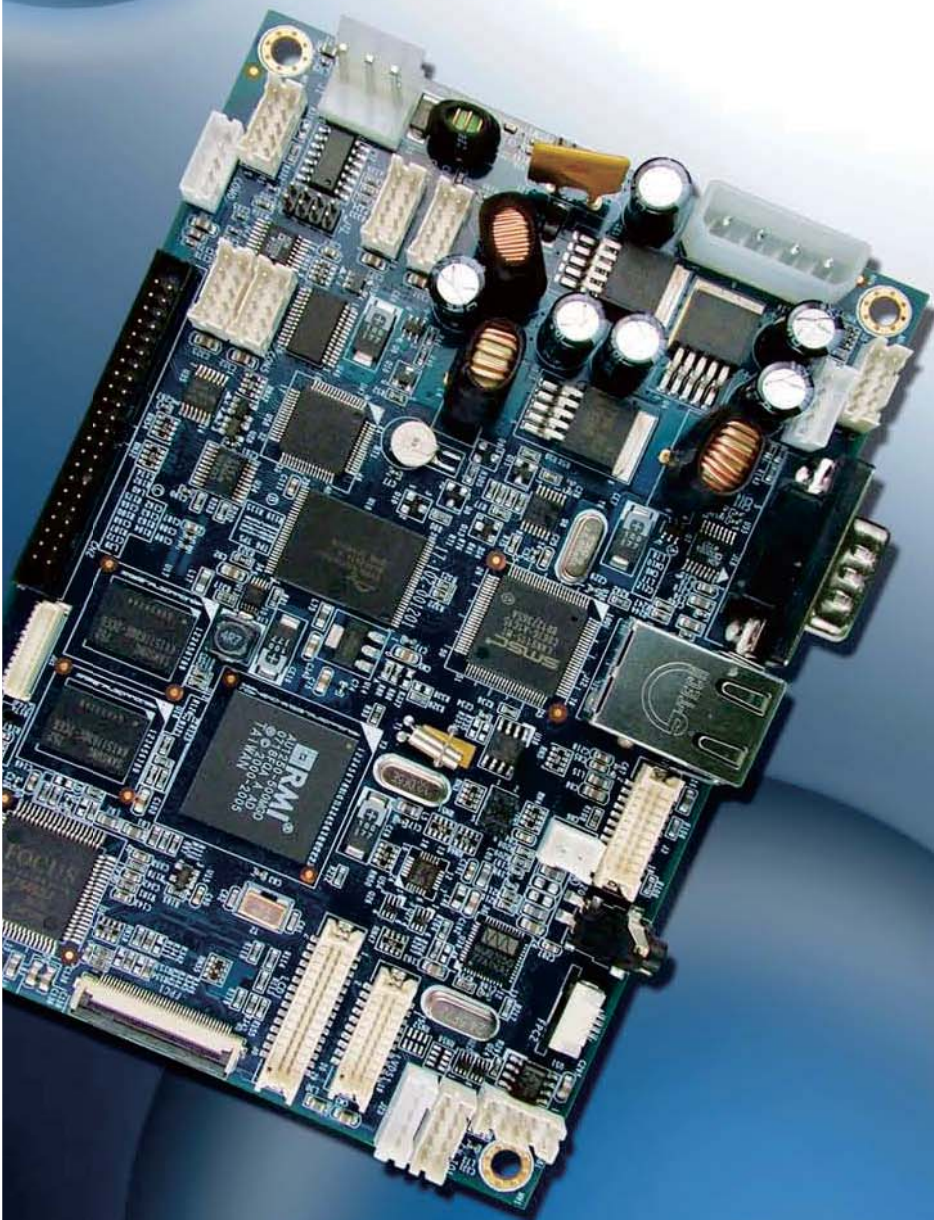

## ER-12LF

MIPS base Motherboard /  
Netlogic Logo CPU / Win  
CE5.0 / SD

### Features and Benefits:

- Netlogic Logo AU1250 features low power consumption and cost-efficiency
- Rich I/O ports support various peripheral
- Compact architecture for space saving application
- Ideal solution to industrial mobile device & portable media gadget
- Provide Linux 2.6 source code included original BSP



### Protech Systems Co., Ltd.

No. 24, Lane 365, Yang Goang Street, Nei Hu District Taipei 114, Taiwan  
TEL: +886-2-8751-1111 FAX: +886-2-8751-1199  
E-mail: [sales@protech.com.tw](mailto:sales@protech.com.tw)  
<http://www.protech.com.tw>

### Protech Technologies Inc.

950 Fee Ana St, Suite B Placentia, CA 92870  
TEL: +1-714- 996-7200 FAX: +1-714- 996-7300  
Sales: [sales@protech-usa.net](mailto:sales@protech-usa.net)  
<http://www.protech-usa.net>

### Protech Japan Co., Ltd.


OSK Bldg, 6F, 6-25-14, Minami-ohi Shinagawa-ku, Tokyo, 140-0013  
TEL: +81-3-5753-8411 FAX: +81-3-3763-9282  
E-mail: [sam@protech-j.com](mailto:sam@protech-j.com)  
<http://www.protech-j.com>



ISO CERTIFIED  
9001 14001

# ER-12LF

MIPS base Motherboard / RMI CPU / Win CE5.0 / SD

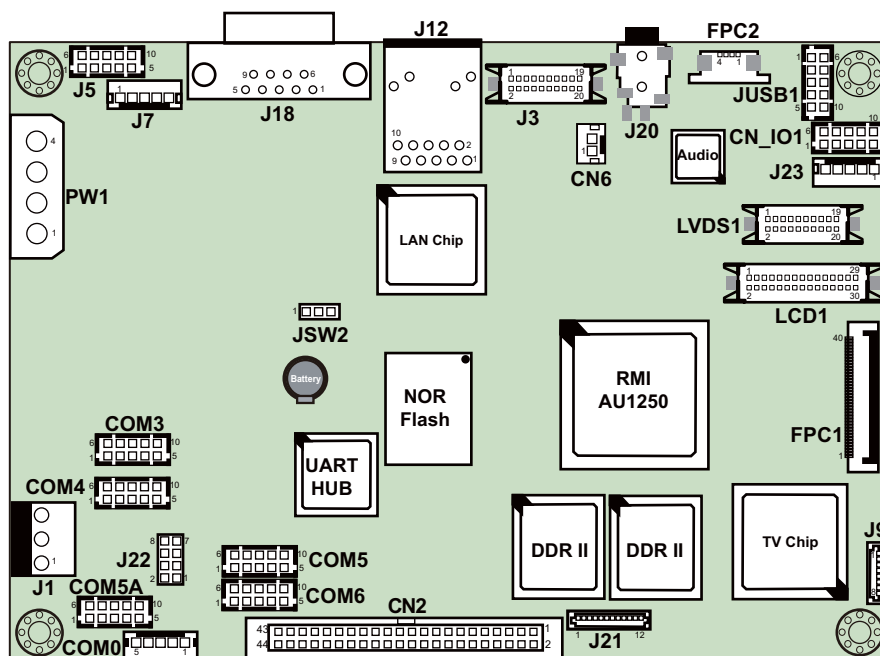

## Specifications

System	
<b>CPU Type</b>	Netlogic Logo AU1250 500MHz
<b>OS Image</b>	OS Microsoft Windows CE 5.0
<b>Display</b>	Support Mpeg (1,2,4, H 263, DivX, WMV9) Resolution 800 x 600 (up to 1024 x 768) Support 18bit TTL TFT LCD
<b>LAN Chip Type</b>	SMSC9115 10/100M base T
<b>NAND Flash</b>	512Mb (64M x 8 bit) on board
<b>NOR Flash</b>	512Mb (64M x 8 bit) on board
<b>SDRAM</b>	128M byte DDR2 (533 MHz)
<b>Watchdog</b>	Hardware watchdog timer
<b>Dimension</b>	145 mm x 102 mm
<b>Certificate</b>	CE, FCC
I/O Chipset	
<b>IDE Interface</b>	1 x 44 pin IDE connector
<b>LCD Interface</b>	2 x 15 pin connector for 18bit TTL LCD 1 x 40 pin FPC connector 2 x 10 pin connector for LVDS
<b>Serial Port</b>	6 x COM (COM 0 for debug, COM 1, COM 3 ~ COM 6 for RS232; COM 5A for RS232 / RS422 / RS485
<b>LAN</b>	1 x RJ45 connector (10/100 Non-PCI Ethernet)
<b>VGA interface</b>	Support VGA port (option)

<b>Sound+ Touch panel CODECAC'</b>	97 Audio + Touchpanel CODEC 1 x 2-pins internal speaker
<b>USB</b>	2 x 5 pin support USB2.0 OTG/ HOST connector
<b>Inverter</b>	1 x 5 pin connector for 12V inverter
<b>Touch Panel</b>	1 x 4 pin FPC connector for 4-wire touch panel 1 x 5 pin P=2.0 connector for 5-wire touch panel
<b>SD/MMC</b>	1 x SD/MMC slot, 1 x 12 Pin for External SD/MMC
<b>Digital I/O</b>	4 bit input and 4 bit output digital port availability
<b>System Status</b>	2 x 4 pin for Power, HDD LED, ON/Reset SW

Environment	
<b>Power Supply</b>	DC in (14~30V) only (3 Pin headed), AT & ATX supported
<b>Power Requirement</b>	19V / 1.0A
<b>Operation Temp.</b>	0° ~ 60° C ( 32° ~ 140° F )
<b>Storage Temp.</b>	- 40° ~ 85° C ( - 40° ~ 185° F )
<b>Humidity</b>	Operation humidity 20 ~ 90%, storage humidity 20 ~ 95%

Ordering Information	
<b>ER12LF-C500</b>	3.5" Netlogic Logo AU1250 500MHz (Industrial) w/TTL/LVDS/6COM/ LAN/ Audio/4DIO; w/o VGA/ RS422/RS485
<b>ER12LF-C500WR</b>	3.5" Netlogic Logo AU1250 500MHz (Industrial) w/TTL/LVDS/6COM/RS422-RS485/ LAN/Audio/ WDT; w/o VGA/4DIO

All of trademarks and brand names are the property of their owners. Trademark "Protech" is the property of Protech Systems Co., Ltd.  
All information contained in this document is subject to change without any prior notice. This catalog is copyrighted in Oct. 2010.