


# BBS-2018

Fanless, Box PC with VIA V4 Eden 1GHz CPU, CF, 40W P/S

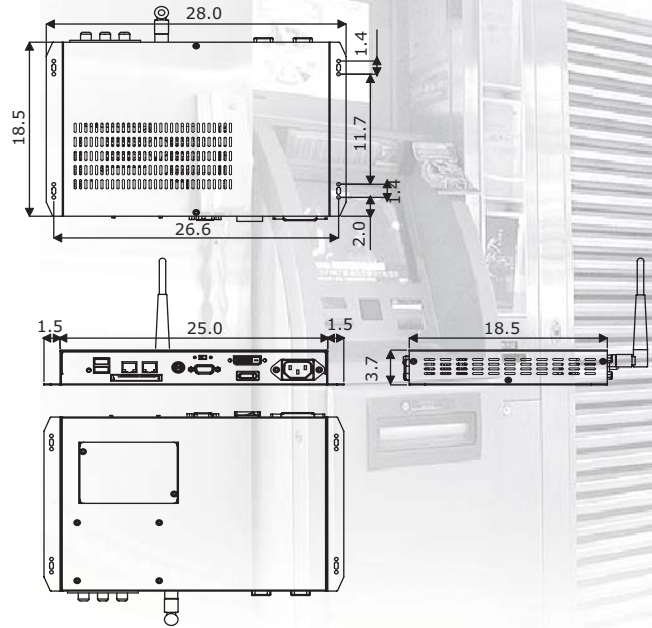

## Features

- Fanless, box PC design
- Built-in HS-2615+VIA V4 Eden 1GHz CPU, 100~240V AC in 40W P/S
- 1 x 2.5" HDD space
- BBS-2018-G provides CF, 4 x COM, 5 x USB2.0, DVI-I display
- Option for Wireless LAN module

## System

### SBC Model

HS-2615

### CPU

VIA V4 Eden 1GHz CPU

### BIOS

Award PnP Flash BIOS

### System Chipset

VIA CX700(M)

### System Memory

1 x 200-pin SO-DIMM socket up to 1GB DDR2 SDRAM

### Display Chipset

CRT: VIA CX700(M)

DVI: VIA CX700(M)

### Audio Chipset

VIA VT1708A

### Ethernet Chipset

Dual RealTek RTL8139DL 10/100 Mbps LAN

Provides Wireless LAN module (option)

### Drive Bay

1 x 2.5" HDD space

### Storage

1 x Type II CF socket

### Watchdog Timer

Software programmable time-out intervals from 1~255 sec. or 1~255 min.

## Mechanical

### Dimensions (LxHxW)

28.0 x 3.7 x 18.5 cm

### Operation/Storage Temperature

0~+45 degrees C/-20~+70 degrees C

### EMC

FCC/CE

### Power Supply



100~240V AC in 40W power supply

## I/O Interface

### External I/O

5 x USB2.0, 2 x LAN, CF, PS/2 KB/MS, VGA, DVI-I, 4 x COM, Video Out, Audio Out

### Rear I/O

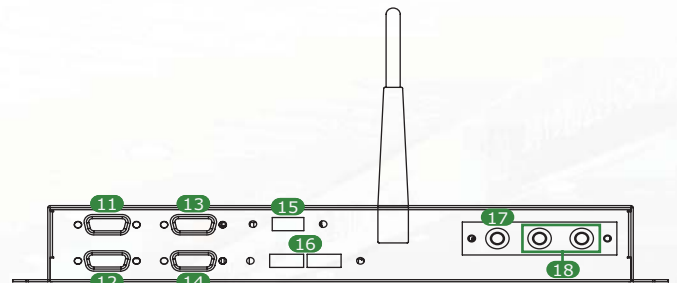

- |                      |                       |                |
|----------------------|-----------------------|----------------|
| 01. Reset Button     | 07. VGA               | 13. COM 3      |
| 02. USB2.0 * 2       | 08. DVI-I             | 14. COM 4      |
| 03. LAN * 2          | 09. Main Power ON/OFF | 15. USB2.0     |
| 04. CF               | 10. AC In             | 16. USB2.0 * 2 |
| 05. KB/MS            | 11. COM 1             | 17. Video Out  |
| 06. VGA/Video Switch | 12. COM 2             | 18. Audio Out  |

## Ordering Guide

### BBS-2018-G

Fanless, Box PC with HS-2615(w/1GHz CPU, CF), 40W P/S

### Accessory Options

Memory Module, CF Module, Wireless LAN Module, 2.5" HDD