


SBC-357

386SX-40 Processor

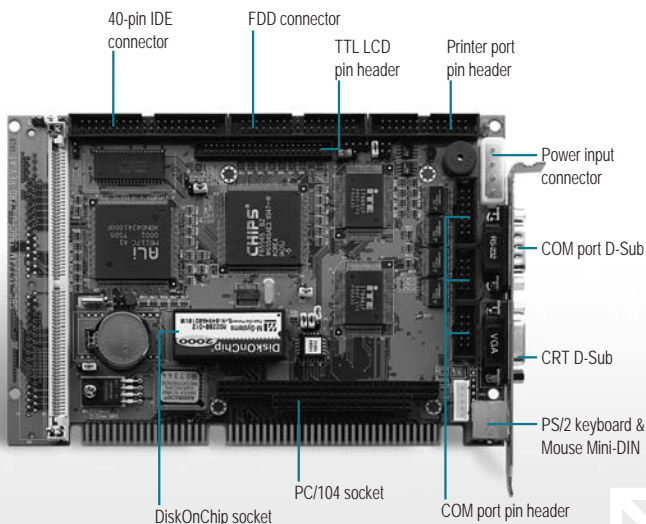

Specifications

System	
CPU	Onboard ALi M6117C
System Memory	72-pin EDO SIMM x 1, Max. 8MB
Memory	Onboard 4MB EDO Memory
Chipset	ALi M6117C
I/O Chipset	ITE 8661F
Ethernet	N/A
BIOS	AMI 128KB FLASH ROM
Watchdog Timer	Generates a time-out system reset
SSD	DiskOnChip® up to 1GB
Expansion Interface	ISA interface, PC/104 socket x 1
Battery	Lithium battery
Power Requirement	+5V, AT
Board Size	7.3"(L) x 4.8"(W) (185mm x 122mm)
Gross Weight	0.7lb (0.3kg)
Operating Temperature	32°F ~ 140°F (0°C ~ 60°C)
Display	Supports CRT and LCD simultaneous display
Chipset	C & T 65545
Memory	1MB
Resolutions	up to 800x600@8bpp colors for CRT up to 640x480@18bpp colors for LCD
LCD Interface	up to 18-bit TTL TFT LCD
I/O	
MIO	EIDE x 1 (PIO-Mode4 x 1), Floppy Disk Drive x 1, Keyboard+Mouse x 1, RS-232 x 3, RS-232/422/485 x 1, Parallel x 1

Features

- Onboard ALi M6117C Single Chip Processor
- 18-bit TTL TFT/DSTN/MONO LCD
- Supports PC/104 Slot
- Supports DiskOnChip® Memory
- 4 COM
- +5V Only Operation



Packing List

- 9657456000 Cable kit (Serial Port Cable, Keyboard and Mouse cable)
- Quick Installation Guide
- Utility CD
- SBC-357

Ordering Information

- **SBC-357-A10-01**
Half-size CPU Card, 386SX, Onboard 4MB EDO RAM, DOC, 4 COM, Rev.A1.0
- **SBC-357-A21**
Half-size CPU Card, 386SX, SVGA, DOC, 4 COM, Rev.A2.1

Optional Accessory

- **AEC-20411-01**
4-slot Industrial Wallmount Chassis, ISA, 150W, AT Power Supply, BP-204SI, Filter

- 1 Full-size SBC
- 2 Half-size SBC
- 3 Embedded Motherboards
- 4 Mini PCI Modules
- 5 Industrial backplanes
- 6 Industrial Chassis
- 7 Sun-readable LCD Monitors
- 8 Accessories