

cPCI-3700

Pentium III / Celeron 3U CPU Module

- ◆ CompactPCI standard, PICMG 2.0 R2.1 compliant
- ◆ Standard 3U form factor
- ◆ Designed for PGA 370 CPU
 - Pentium III 500E/550E, integrated 256KB L2 cache
 - Celeron 433/466, integrated 128KB L2 cache
- ◆ On-board C&T 69000 VGA Controller
- ◆ Support 7 bus-master PCI devices
- ◆ 2-slot width version is available for embedded applications
- ◆ DOM2000 and Disk-On-Chip socket reserved for flash storage
- ◆ Integrated with HDD, FDD
- ◆ Default HDD capacity: 2.1GB
- ◆ Default Memory capacity: 64MB
- ◆ Default CPU type: Celeron-400MHz

Ordering Information

cPCI-3700: All-in-one Socket370 CPU Module

cPCI-3700-2S: All-in-one Socket370 CPU Module without FDD

cPCI-3500: All-in-one Pentium CPU Module (no VGA Support)

cPCI-3500-2S: All-in-one Pentium CPU Module without FDD


cPCI-3700-02 / cPCI-3500-02: All-in-one CPU Module without
HDD/FDD for customized storage
device combination

Flash Disk 2000

44-pin 2.5" IDE interface flash disk with storage capacity from
64MB to 1GB



cPCI-3700

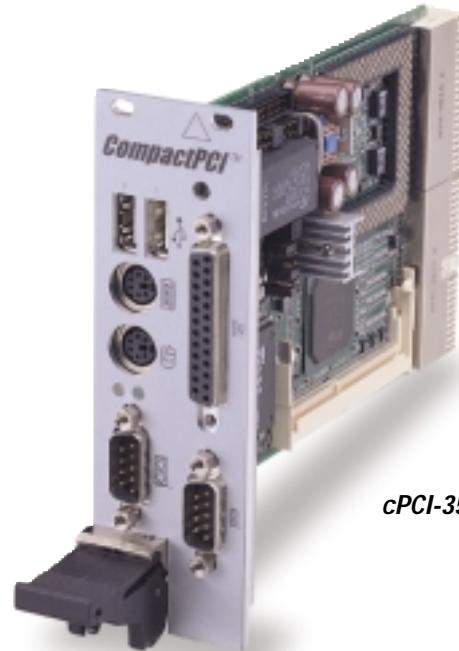

cPCI-3500-2S

Pentium III CPU for the PGA370

- ◆ 500 / 550MHz
- ◆ 256KB L2 Cache with ECC
- ◆ Support for ATC / ASB
- ◆ PGA 370 socket packing

