

Features

- Fanless, box PC design
- Built-in HS-2622+VIA V4 Eden 1GHz CPU, 100~240V AC in 40W P/S
- 1 x 2.5" HDD space
- BBS-2017-H provides CF, 2 x COM, 6 x USB2.0, DVI display

System

SBC Model

HS-2622

CPU

VIA V4 Eden 1GHz CPU

BIOS

Award BIOS with 4Mb Flash EEPROM

System Chipset

VIA CX700(M)

System Memory

1 x 200-pin SO-DIMM socket up to 1GB DDR2 SDRAM

Display Chipset

VIA CX700(M)

Audio Chipset

RealTek ALC883 7.1+2CH audio codec

Ethernet Chipset

Dual VIA VT6106S 10/100 Mbps LAN

Drive Bay

1 x 2.5" HDD space

Storage

1 x Type II CF socket

Watchdog Timer

Reset: 1 sec.~255 min. and 1 sec. or 1 min./step

Mechanical

Dimensions (LxHxW)

28.96 x 5.08 x 16.5 cm

Operation/Storage Temperature

0~+45 degrees C/-20~+70 degrees C

EMC

FCC/CE

Power Supply


100~240V AC in 40W power supply

I/O Interface

External I/O

PS/2 KB/MS, MIC In, Line In, Line Out, 2 x COM, VGA, 2 x LAN, 6 x USB2.0, CF, DVI

Rear I/O

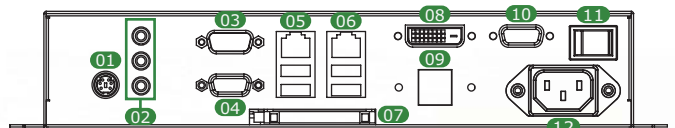

- | | | |
|-----------|----------------------|-----------------------|
| 01. KB/MS | 05. LAN + USB2.0 * 2 | 09. USB2.0 * 2 |
| 02. Audio | 06. LAN + USB2.0 * 2 | 10. COM 2 |
| 03. COM 1 | 07. CF | 11. Main Power ON/OFF |
| 04. VGA | 08. DVI | 12. AC In |

Ordering Guide

BBS-2017-H

Fanless, Box PC with HS-2622(w/1GHz CPU, CF), 40W P/S

Accessory Options

Memory Module, CF Module, 2.5" HDD