


# GENE-5315 Rev. B

3.5" SubCompact Board With AMD Geode™ LX Series Processor

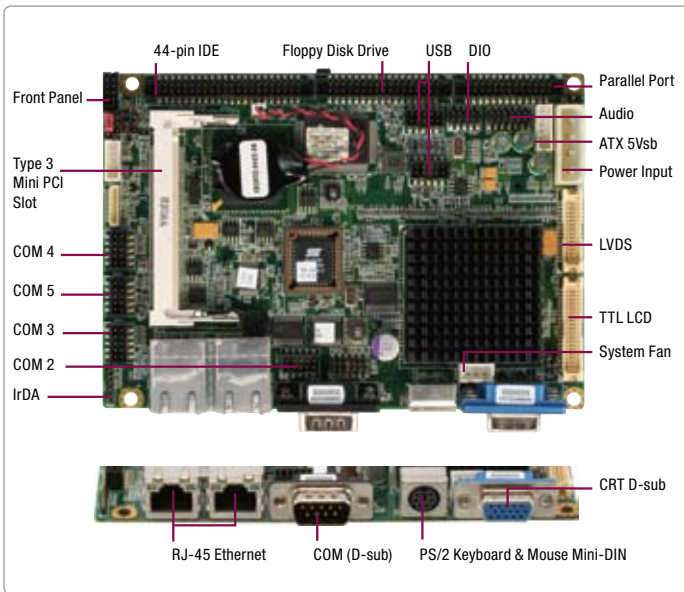

## Features

- Onboard AMD Geode™ LX800 Processor
- AMD Geode™ LX + CS5536
- SODIMM DDR333 Max. 1 GB, DDR400 Max. 512 MB
- 10/100Base-TX Ethernet x 2, RJ-45 x 2
- Up to 24-bit Single Channel LVDS/ TTL LCD & CRT
- AC97 Codec 2CH Audio
- EIDE x 1, Floppy Disk Drive x 1, CompactFlash™ x 1
- COM x 5, Parallel x 1, USB2.0 x 4, 8-bit Digital I/O
- Mini PCI x 1
- +5V Only Operation

## Specifications

System	
Form Factor	3.5"
Processor	Onboard AMD Geode™ LX800 series processor
System Memory	200 pin DDR SODIMM x 1, Max 1 GB for DDR333 and 512 MB for DDR400
Chipset	AMD Geode™ LX + AMD CS5536
I/O Chipset	ITE IT8712
Ethernet	Realtek RTL8139DL, 10/100Base-TX, RJ-45 x 2
BIOS	Award 512 KB Flash ROM
Wake On LAN	Yes
Watchdog Timer	Generates a time-out system reset
H/W Status Monitoring	Supports power supply voltages and temperature monitoring
Expansion Interface	Mini PCI x 1
Battery	Lithium battery
Power Requirement	+5V/ AT/ ATX
Power Consumption (Typical)	LX800 500 MHz, DDR 333 1 GB 1.17A@+5V
Board Size	5.75" (L) x 4" (W) (146mm x 101.6mm)
Gross Weight	0.88 lb (0.4 Kg)
Operating Temperature	32°F ~ 140°F (0°C ~ 60°C), -4°F ~ 158°F (-20°C ~ 70°C) for WITAS 1
Storage Temperature	-40°F ~ 176°F (-40°C ~ 80°C)
Operating Humidity	0% ~ 90% relative humidity, non-condensing
MTBF (Hours)	90,000
Display	
Chipset	AMD Geode™ LX Integrated
Memory	Shared system memory up to 254 MB
Resolutions	Up to 1920 x 1440 @ 24bpp for CRT Up to 1600 x 1200 @ 24bpp for LCD
LCD Interface	Up to 24-bit single channel TTL/LVDS TFT LCD
I/O	
Storage	EIDE x 1 (UDMA 33 for two devices), Type 2 CompactFlash™ x 1, Floppy Disk Drive x 1
Serial Port	RS-232 x 4, RS-232/422/485 (auto flow) x 1
Parallel Port	SPP/ EPP/ ECP mode
USB	USB2.0 x 4
PS/2 Port	Keyboard x 1, Mouse x 1
Digital I/O	Supports 8-bit (Programmable)
IrDA	One IrDA Tx/Rx header
Audio	Mic-in, Line-in, Line-out, CD-in




## Packing List

- **9681531501**  
Cable Kit for GENE-5315
  - 1700060192 Keyboard & Mouse Cable
  - 1709100201 USB Cable
  - 1701440500 IDE Cable
- **9657666600**  
Jumper Cap
- **Product CD**
- **GENE-5315 Rev. B**

# GENE-5315 Rev. B

## Dimension Unit: mm

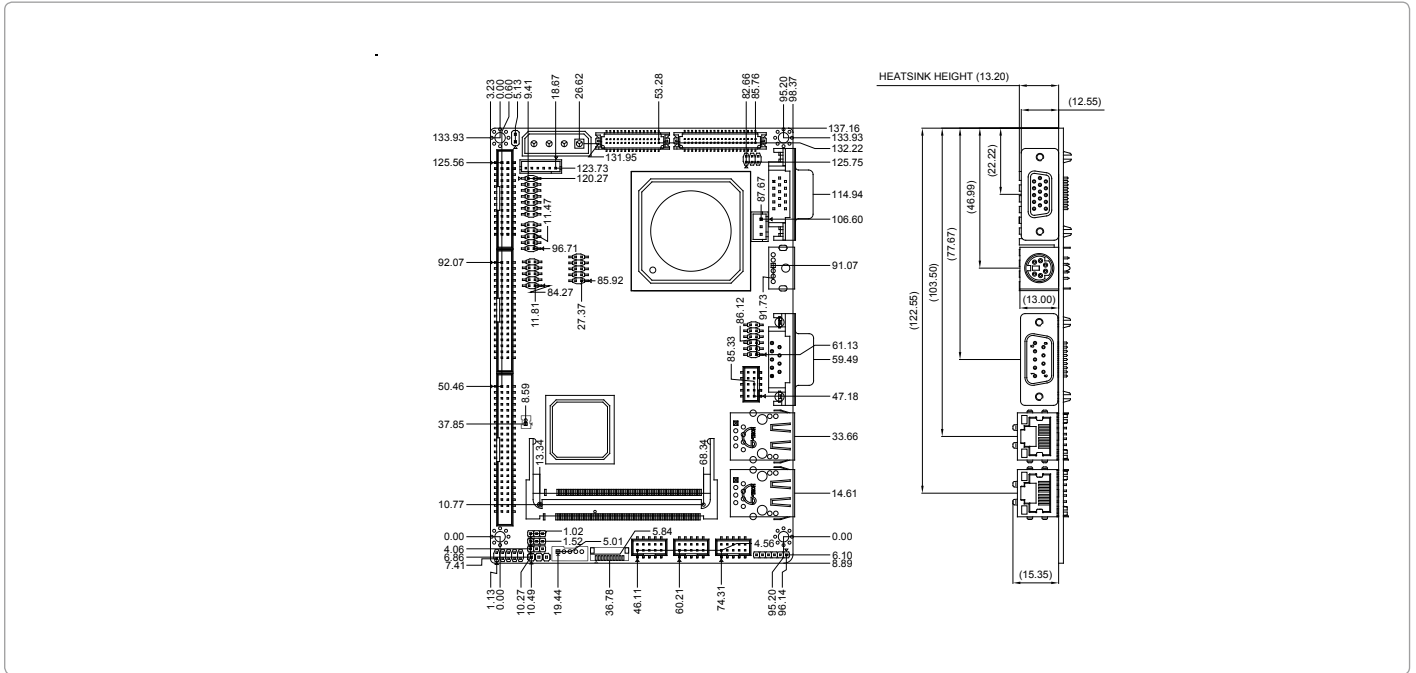

## Ordering Information

Part Number	CPU	Fan/Fanless	Display	LVDS	Storage	LAN	USB	RS-232	RS-232/422/485	Expansion Slot	Power	Temp
TF-GENE-5315-B10	AMD Geode™ LX800	Fanless	CRT + LVDS CRT + TTL	24-bit, 1CH	EIDE x 1 Floppy x 1 CompactFlash™ x 1	FE x 2	4	4	1	Mini PCI x 1	+5V DC	0°C ~ 60°C
TF-GENE-5315-B10-01	AMD Geode™ LX800	Fanless	CRT + LVDS CRT + TTL	18b, 1CH	EIDE x 1 Floppy x 1 CompactFlash™ x 1	FE x 2	4	4	1	Mini PCI x 1	+5V DC	0°C ~ 60°C
TF-GENE-5315W1-B10	AMD Geode™ LX800	Fanless	CRT + LVDS CRT + TTL	24-bit, 1CH	EIDE x 1 Floppy x 1 CompactFlash™ x 1	FE x 2	4	4	1	Mini PCI x 1	+5V DC	WITAS1 (-20°C ~ 70°C)
TF-GENE-5315W1-B10-01	AMD Geode™ LX800	Fanless	CRT + LVDS CRT + TTL	18b, 1CH	EIDE x 1 Floppy x 1 CompactFlash™ x 1	FE x 2	4	4	1	Mini PCI x 1	+5V DC	WITAS1 (-20°C ~ 70°C)

## Optional Accessories

- **1702200205**  
Conversion Cable for ATX Power Supply, Length 20cm
- **1709140181**  
Audio Cable, Length 18cm
- **1709100208**  
USB Cable, Length 20cm
- **1701100206**  
COM Port Cable, 9P DB Male, Length 20cm
- **1701260201**  
Parallel Port Cable, Length 20cm
- **1701340600**  
Floppy Cable, Length 60cm