

NAR-4040

1U server with four Fast Ethernet ports




FEATURE

- Cost-effective P4 platform with Celeron® 2.0 GHz processor
- Four Fast Ethernet ports supported
- One internal PCI expansion slot
- Non-volatile memory on-board
- Support Compact Flash and Disk on Module (DOM)
- Load Factory-Default mechanism
- Front access for user-friendly maintenance
- Optional crypto solution: refer to crypto table on Page 28

SPECIFICATION

CPU Board	- Support Intel® P4 processor with default Celeron® 2.0GHz - Intel® 845GV chipset with 533MHz FSB
System Memory	- Up to 2GB DDR 200/266 on two 184-pin DIMM socket with default 256MB
Ethernet Port	Four Fast Ethernet ports (Intel® 82551)
PCI Expansion	One internal PCI expansion slot on-board
Storage Device	CompactFlash (128MB default)
Serial Port	- One DB9 (for system console) - One 2x5 pin-connector
LCD Panel	N/A
LEDs	LED indicators for power status and storage access
IDE	One 40-pin and one 44-pin IDE connectors
USB	Pin header on-board for two USB devices
VGA	Built-in on-board VGA pin-connector
Power	Full-range 220W ATX PSU
Dimension	428.6(W) x 360(D) x 44(H)mm 16.87"(W) x 14.17"(D) x 1.73"(H)
Packing Dimension	22.4"(W) x 24.4"(D) x 8.7"(H)
Weight	Gross: 9.8kg(21.59 lbs); Net: 5.2kg (11.45 lbs)
Operating Environment	- Temperature: 5 to 40°C (67 to 130°F) - Humidity 20% to 90% RH
Storage Environment	- Temperature: 0 to 70°C (58 to 184°F) - Humidity 5% to 95% RH
Certification	CE/FCC/UL

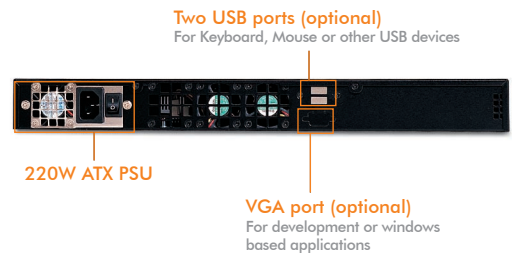

ORDERING GUIDE

Part No.	Ethernet	EZIO	PCI Exp.	Crypto
NAR-4040-420	- 4 10/100 FE	N/A	1 (internal)	N/A