


Intel[®] Pentium[®] 4 3.2 GHz/ Celeron[®] PICMG Full-size SBC SATA Supports

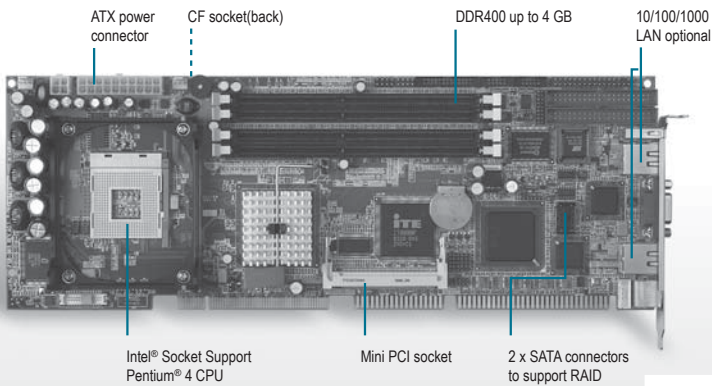

Specifications

System	
Form Factor	PICMG Full-size SBC
Processor	Intel [®] Pentium [®] 4/ Celeron [®] / Prescott CPU, FSB: 400/533/800 MHz, supports up to 3.2GHz
Main Chipset	Intel [®] 865GV + Intel [®] 82801EB/ER (ICH5/ICH5R)
System Memory	4 x 184-pin 2.5V DDR DIMM Socket, total up to 4 GB Supports Dual Channels DDR memory (DDR 266/333/400)
VGA Controller	Integrates on Intel [®] 865GV, AGP 8X, Core frequency up to 266MHz
LCD Controller	Chrontek CH7017A supports TV-out And LVDS output
Ethernet	10/100Mb or 10/100/1000Mb LAN optional, RJ-45 x2 Intel [®] 82562EZ/ 82547GI/ 82551QM /82541GI controller
Audio (Daughter Board)	Realtek ALC655 AC97 Codec, MIC-in/Line-in/Line-out/CD-in
BIOS	Award Plug & Play Firmware Hub BIOS - 4Mb ROM
IDE Interface	ATA-100 x 2 channels (Supports two ATAPI devices) SATA-150 x 2 (Supports two SATA devices, Raid function optional)
CompactFlash [™]	Supports CFD Type II Connector
Expansion Interface	ISA/ PCI/ Mini PCI Type III
IR Interface	Supports IrDA header x 1
Watchdog Timer	1 ~ 255 sec, can be set with software on Super I/O
RTC	Internal RTC
Power Requirement	ATX, ATX12V
Operating Temperature	32°F ~ 140°F (0°C ~ 60°C)
I/O	
Floppy Drive Interface	One Standard Floppy Disk Drive port, supports up to two floppy devices
Serial Port	Two COM ports: (Internal Pin Header, External D-sub x 2) COM 1: RS-232 COM 2: RS-232/ RS-422/ RS-485
Parallel Port	Supports SPP/ EPP/ ECP mode
Keyboard and Mouse	One Mini-DIN PS/2 Keyboard and Mouse connector One internal keyboard pin header
Universal Serial Bus	Seven USB 2.0 ports Three 5 x 2 pin headers for internal One TYPE-A Connector onboard

Features

- Supports Intel[®] Pentium[®] 4 CPU Up to 3.2GHz
- DDR400 Memory Supports Up to 4GB
- Integrates AGP 8X 2D/3D Graphics Accelerator, VGA Support
- Integrates AC-97 Codec Audio (Daughter Board optional)
- Supports Dual 10/100/1000Base-TX Ethernet (10/100 & GbE Optional)
- Supports Ultra ATA100 & SATA & CompactFlash[™] Type-II Storage
- 7 USB 2.0 Ports/ RS-232 X 1, RS-232/422/485 X 1/ 1 Parallel/ 1 IrDA Port
- Watchdog Function 1 ~ 255 Sec.




Packing List

- 1701340704**
Flat Cable, 34P, 70cm, GRAY for Floppy Disk Drive
- 1701400453**
Cable, 40P 2.54mm IDC w/Nose w/Fold, 40P 2.54mm IDC w/ Nose w/Fold, 45cm, Blue ATA-100
- 1709100201**
USB Cable, 20cm 2.0mm, w/Bracket
- 1700060192**
Cable, 6P-6P-6P, 19cm, IVORY PS2/ Keyboard&Mouse
- 1701260307**
Flat Cable, 9P/DB9P MALE&25P DB25P FEMALE, 10P 2mm&26P 2mm/ IDC NO FOLD, 30cm, w/Bracket
- 1701100305**
Flat Cable, 9P/DB9P MALE, 10P/ 2.0mm Pitch/ IDC NO FOLD, 30cm, w/Bracket
- 1703030501**
Wire, 3P 2.5mm Housing, 3P 2.5mm Housing, 50cm
- 1709070780**
SATA Cable: 7P Pitch 1.27mm, 78cm
- Quick Installation Guide**
- Utility CD**
- FSB-865G**

Ordering Information

- FSB-865G-A10-V**
Full-size CPU Card, Socket 478 for Pentium[®] 4, VGA, 7 USBs, CF, AC97, SATA, ATX, Rev. A1.0
- FSB-865G-A10-VE**
Full-size CPU Card, Socket 478 for Pentium[®] 4, VGA, 1 LAN, 7 USBs, CF, AC97, SATA, ATX, Rev. A1.0
- FSB-865G-A10-VG**
Full-size CPU Card, Socket 478 for Pentium[®] 4, VGA, 1GbE LAN, 7 USBs, CF, AC97, SATA, ATX, Rev.1.0
- FSB-865G-A10-E2**
Full-size CPU Card, Socket 478 for Pentium[®] 4, VGA, 2 LANs, 7 USBs, CF, AC97, SATA, ATX, Rev. A1.0
- FSB-865G-A10-EG**
Full-size CPU Card, Socket 478 for Pentium[®] 4, VGA, 1 LAN, 1 GbE LAN, 7 USBs, CF, AC97, SATA, ATX, Rev. A1.0
- FSB-865G-A10-G2**
Full-size CPU Card, Socket 478 for Pentium[®] 4, VGA, 2 GbE LANs, 7 USBs, CF, AC97, SATA, ATX, Rev.1.0
- FSB-865G-A10-F**
Full-size CPU Card, Socket 478 for Pentium[®] 4, VGA, LVDS, TV-out, 2 GbE LANs, 7 USBs, CF, M-PCI, AC97, SATA, ATX, Rev. A1.0

Dimension Unit: mm

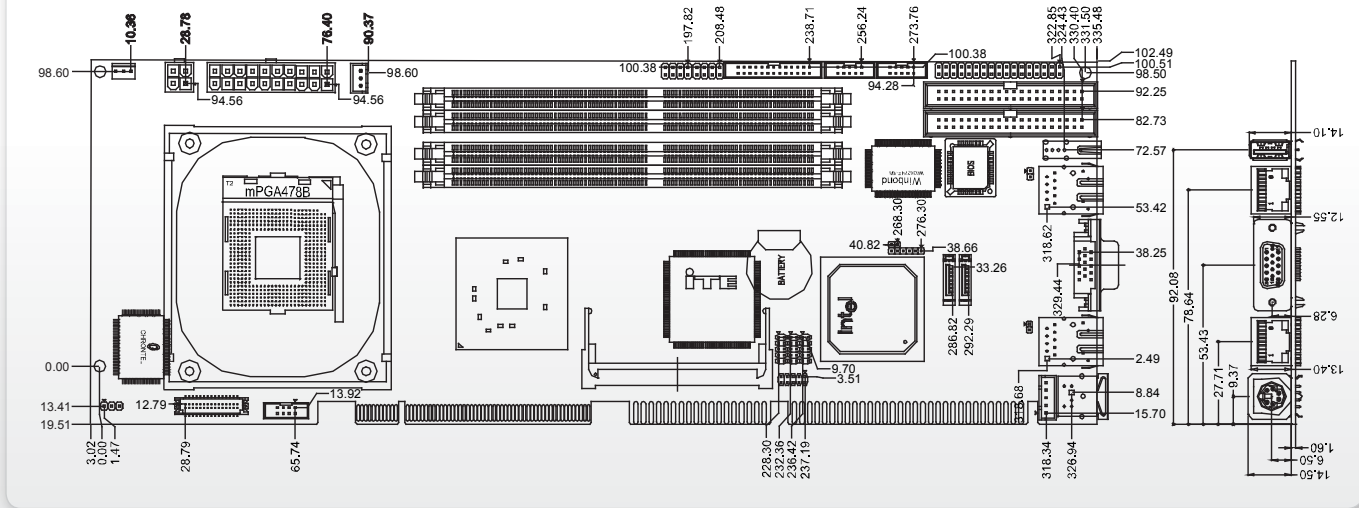

Passive Backplane Options

P/N	Description	Master Interface	Slots	Power Connector, ATX Extend Function
BP-213RG-P4-A11	Rackmount, PICMG, 13-slot R.PCI Backplane, 4 PCI/7 ISA, Single Segment, AT/ATX, Rev. A1.1	PICMG	4/8/2 (PCI/ ISA/ PICMG)	AT, ATX, 3-pin ATX extend
BP-214SG-P4-A11	Rackmount, PICMG, 14-slot Backplane, 4 PCI/ 8 ISA, Single Segment, AT/ATX, Rev. A1.1	PICMG	4/9/2 (PCI/ ISA/ PICMG)	AT, ATX, 3-pin ATX extend
BP-214SG-P7-A11	Rackmount, PICMG, 14-slot Backplane, 7 PCI/5 ISA, Single Segment, AT/ATX, Rev. A1.2	PICMG	7/6/2 (PCI/ ISA/ PICMG)	AT, ATX, 3-pin ATX extend
BP-214SG-P12-A11	Rackmount, PICMG, 14-slot Backplane, 12 PCI/1 ISA Single Segment, AT/ATX, Rev. A1.1	PICMG	12/2/2 (PCI/ ISA/ PICMG)	AT, ATX, 3-pin ATX extend
BP-208SG-P4-A11	Wallmount, PICMG, 8-slot Backplane, 4 PCI/ 2 ISA, Single Segment, AT/ATX, Rev. A1.1	PICMG	4/3/2 (PCI/ ISA/ PICMG)	AT, ATX, 3-pin ATX extend
BP-208SG-P7-A11	Wallmount, PICMG, 8-slot Backplane, 7 PCI/ 0 ISA, Single Segment, AT/ATX, Rev. A1.1	PICMG	7/0/1 (PCI/ ISA/ PICMG)	AT, ATX, 3-pin ATX extend
BP-206VG-P4-A11	Rackmount, PICMG, 6-slot Backplane, 4 PCI/ 0 ISA, Single Segment, AT/ATX, Rev. A1.1	PICMG	4/0/1 (PCI/ ISA/ PICMG)	AT, ATX, 3-pin ATX extend
BP-206VG-P2-A10	Rackmount, PICMG, 6-slot Backplane, 2 PCI, 3 ISA, Single Segment, ATX, Rev. A1.0	PICMG	2/3/1 (PCI/ ISA/ PICMG)	AT, ATX, 3-pin ATX extend
BP-206SG-P4-A11	Wallmount, PICMG, 6-slot Backplane, 4 PCI, 2 ISA, Single Segment, ATX, Rev. A1.1	PICMG	4/2/2 (PCI/ ISA/ PICMG)	AT, ATX, 3-pin ATX extend

Optional Accessories

- PER-U00A**
AC97 Audio Daughter Board
- 1759200004**
CPU Cooler Fan for Pentium® 4 3.2G, 3P, 12V, One ball bearing
- 1759200154**
CPU Cooler Fan + Heat Sink, Socket 478, 3P, 12V, 1U Low Profile
- 1701400802**
Flat Cable, 40P-40P-40P(UL:2651, 15cm + 65cm), 80cm for ATA33
- 1701400800**
Flat Cable, 40P-40P-40P(UL:20674, 15cm + 65cm), 80cm for ATA100
- 1701400702**
Flat Cable, 40P ATA-100 2.54mm, BLUE/GRAY/BLACK 70cm for Hard Disk Drive
- 1703300351**
LCD Cable, 30-pin to 20-pin, 35cm, for Hyundai HT12X11-200 12.1"/ 1024*768/ 3.3V LVDS Panel
- 1703300352**
LCD Cable, 30-pin to 30-pin, 35cm, for Hyundai HT17E11-300 17"/ 1280*1024/ 3.3V LVDS Panel, Samsung LTM150XH-L04 15.1"/ 1024*768/ 3.3V LVDS Panel

01

Full-size SBC

02

Half-size SBC

03

Industrial Motherboard

04

Industrial Chassis

05

Firewall Platform

06

Industrial Backplanes

07

Daughter Board

08

Embedded Motherboards

09

Mini PCI Modules

10

Sun-readable LCD Monitors

11

Accessories