

PPC

POS-6510-PPC

15" Fanless and High Performance Panel PC

Features and Benefits:

- Atom D525 platform 15" panel PC
- Ultra slim Panel PC
- 15" LCD display with ELO 5-wire resistive or ELO surface capacitive touch screen
- Supports CF Type I/II socket
- VESA 100 Wall mounting standard
- Optional MSR & Smart Card reader
- Ideal system to be floor-stand kiosk



Ultra slim



Protech Systems Co., Ltd.

No. 24, Lane 365, Yang Goang Street, Nei Hu District Taipei 114, Taiwan
 TEL: +886-2-8751-1111 FAX: +886-2-8751-1199
 E-mail: sales@protech.com.tw
<http://www.protech.com.tw>

Protech Technologies Inc.

950 Fee Ana St, Suite B Placentia, CA 92870
 TEL: +1-714- 996-7200 FAX: +1-714- 996-7300
 Sales: sales@protech-usa.net
<http://www.protech-usa.net>

Protech Japan Co., Ltd.

OSK Bldg, 6F, 6-25-14, Minami-ohi Shinagawa-ku, Tokyo, 140-0013
 TEL: +81-3-5753-8411 FAX: +81-3-3763-9282
 E-mail: sam@protech-j.com
<http://www.protech-j.com>




ISO CERTIFIED
9001 14001


POS-6510-PPC

15" Fanless and High Performance Panel PC


Front View

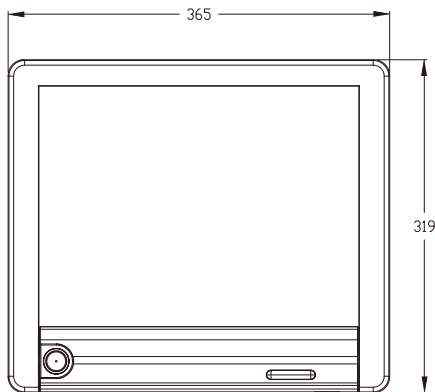

Side View



I/O View



Unit: mm

Specification

System	
CPU Support	Intel® Atom™ D525 CPU
Memory	2 x DDR3 SO-DIMM Slot (up to 4GB)
Core Logic	Intel® ICH8M
Network	1 x Giga fast ethernet
Audio	1 x line-out
Power Supply	120 Watt Power Adaptor
System Weight	6.5 kg (Fanless)
Dimension (WxHxD)	365 x 318.5 x 77mm
Mounting Type	Support VESA 100 standard
O.S. Support	WIN7 /WIN7E /Win XP /XPE, WEPOS, POSReady 2009

Storage

HDD	1 x 2.5" SATA HDD (standard 250GB)
SSD	over or equal 8GB SSD module
CF	Bootable Compact Flash slot for CF type I/II storages

I/O Ports

USB	4 x USB 2.0 ports / 1 x USB 2.0 on side bezel
Serial Ports	2 x DB-9 (COM /2/3), 1 x RJ45 (COM 1), +5/12V Selectable (COM 1~3)
PS/2	1 x PS/2 ports (default at keyboard)
LAN	1 x RJ-45
VGA	1 x DB-15 VGA Interface
Audio	1 x 2W speaker
Cash Drawer	1 x RJ11 (+12V or +24V selectable)
Mounting Type	Support VESA 100 standard (Not support embedded)

Display

LCD	15" TFT LCD
Max. Resolution	1024 x 768
Brightness	250 cd/m ²
Touch Screen	5-wire analog resistive / Surface capacitive

Environment

EMC & Safety	CE, FCC, cUL
Operating Temp.	0 ~ 35° C
Storage Temp.	-20 ~ 60° C
Humidity	20 ~ 90%

Ordering Information

POS-6510-PPC	15" Panel PC with Intel® Atom™ Pineview D525 CPU, 1GB DDR3, SO-DIMM, 250GB HDD
i-Button	Build-in PPC type, Read only, output through PS/2 KB interface or with AP decode through RS232 interface
MSR	Build-in PPC type, JIS-I or II, ISO Track1+2+3 (PS/2 KB Interface)
Color	Black or White
OS	WIN7 /WIN7E /Win XP /XPE, WEPOS, POSReady 2009
Fingerprint / Vertical MSR	Vertical module, Fingerprint (USB interface) + vertical MSRModule (PS/2 interface)
MSR /i-Button /RFID	Vertical module, MSR, Read only, JIS-I or II, ISO Track1+2+3; I-button Read only; RFID, Read / Write, ISO 14443A 13.56MHz (USB Interface)

All of trademarks and brand names are the property of their owners. Trademark "Protech" is the property of Protech Systems Co., Ltd. All information contained in this document is subject to change without any prior notice. This catalog is copyrighted in Sep. 2011.