


# Open Frame Power Supply

## EOFP- 200-M

**200W Output Power**  
**Open Frame Configuration**

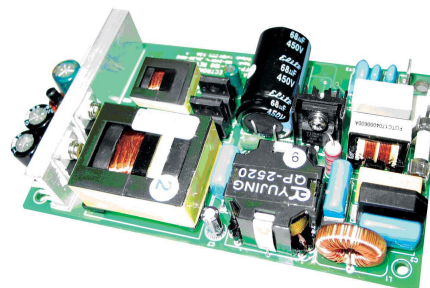

Dimension: 177.8(W) x 101.6(H) x 40(D) mm

**Features:**

- ⦿ Quick Removable Application
- ⦿ Active Power Factor Correction
- ⦿ Universal Power Input
- ⦿ Current Sharing on 24V & 12V
- ⦿ Over Voltage Protection
- ⦿ Over Current Protection
- ⦿ Over Power Protection
- ⦿ Short Circuit Protection
- ⦿ MTBF >100,000 Hours

**General Specifications:**

- ⦿ Input Range: 110 to 240 VAC
- ⦿ Power Factor: 0.95 minimum
- ⦿ Efficiency: 80% minimum, at full load
- ⦿ Hold up Time: 20mS minimum, at full load
- ⦿ Operating Temperature: 0 to 40 °C
- ⦿ Operating Humidity: 20 to 90 %

**Agency Requirements:**

- ⦿ Harmonic: Meet EN61000-3-2
- ⦿ EMI/RFI: CE, FCC class B

**Electrical Specifications:**

**Regulation, Ripple & Noise:**

Output	+12V	+24V
Load Regulation	5%	5%
Cross Regulation	5%	5%
Line Regulation	± 1%	± 1%
Ripple & Noise	120mV	240mV

**Input and Output Ratings:**

Voltage	Input		Watt	Output		
	Frequency	Current		Load	+12V	+24V
110 - 240 VAC	47-63 Hz	4-2A	200W	Max Load Min Load	8 0	4.5A 0A