


CPU Cards

IB720

Socket 370 Half-Size PISA CPU Card w/ Intel® 440BX AGPset

Pentium® III-Based

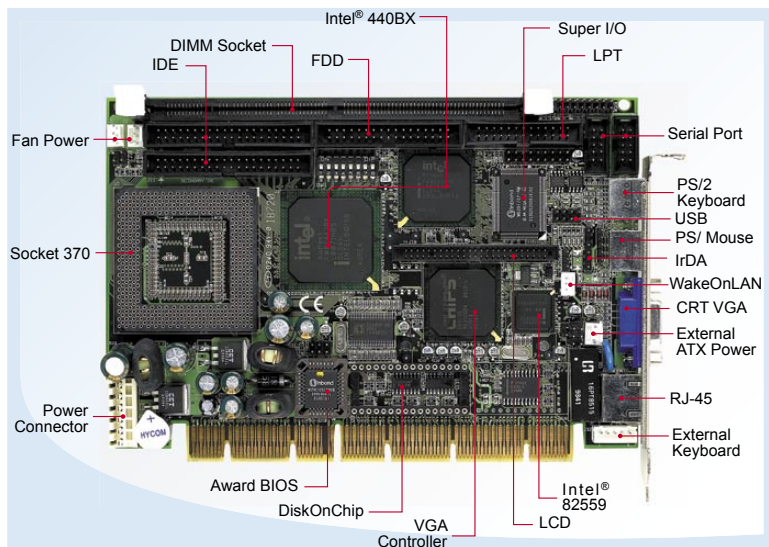

>> Features

- Supports Pentium® III / Celeron® processors
Up to 1.1GHz, 66/100MHz FSB
- SDR DIMM x 1, Max. 256MB
- Intel® 82559 10/100 BaseT Ethernet
- C&T 69000 VGA, supports CRT/LCD
- 2 x USB 1.1, Watchdog timer, DiskOnChip®

System

CPU	Socket 370 for Pentium® III / Celeron®, up to 1.1GHz
System Memory	SDR DIMM x 1, Max. 256MB
System Chipset	Intel® 440BX AGPset, 66/100MHz FSB
BIOS	Award 2Mbit
Watchdog Timer	16 levels
SSD	DiskOnChip®
H/W Monitor	Yes
Expansion Slot	N/A

Graphics

VGA Controller	C&T 69000
VGA Memory	2M embedded
LCD Interface	36-bit TTL

Ethernet

LAN Controller	Intel® 82559 LAN, 10/100Mbps
Connector	RJ-45 on board

Multi I/O

Chipset	Winbond W83977 2x IDE (UDMA33), 1x FDD, 1x KB, 1x Mouse, 1x RS-232, 1x RS-232/422/485, 1x LPT
USB	Pin header for 2 ports (USB 1.1)
Audio	N/A
Others	IrDA

Mechanical and Environmental

Dimensions	186mm x 129 mm (7.32" x 5.08")
Max. Power Requirement	+5V: 10A +/-12V: 200mA
Operating Temperature	0°C~60°C (32°F~140°F)
Storage Temperature	-20°C~80°C (-68°F~176°F)
Relative Humidity	10%~90% (non-condensing)

Ordering Information

IB720	Socket 370 Half-Size Intel® 440BX CPU card w/ VGA and 10/100 Ethernet
IB720V	Socket 370 Half-Size Intel® 440BX CPU card w/ VGA, w/o Ethernet
IB720P	Socket 370 Half-Size Intel® 440BX CPU card w/o VGA, w/o Ethernet