


BPF-3017

Ultra Slim, 17" Fanless Panel PC, IR Touch Screen, 12V DC Adapter

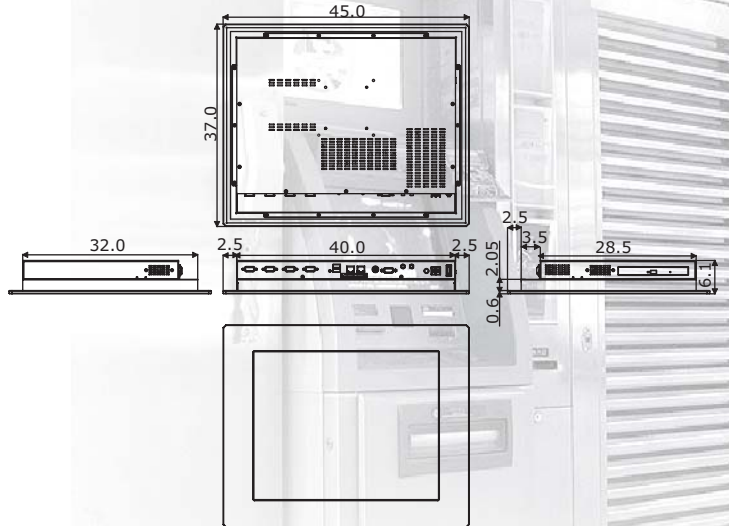

Features

- Ultra slim, fanless, aluminum front panel design
- 17" TFT color panel display
- Built-in IR touch screen, HS-2615+VIA V4 Eden 1GHz CPU, 12V DC adapter
- Onboard graphics, dual ethernet, audio controller
- 1 x 2.5" HDD space, 1 x slim CD-ROM space
- BPF-3017-E provides CF, 4 x COM, 2 x USB2.0
- Option for Wireless LAN module

System

SBC Model

HS-2615

CPU

VIA V4 Eden 1GHz CPU

BIOS

Award PnP Flash BIOS

System Chipset

VIA CX700(M)

System Memory

1 x 200-pin SO-DIMM socket up to 1GB DDR2 SDRAM

Display Chipset

VIA CX700(M)

Audio Chipset

VIA VT1708A

Ethernet Chipset

Dual RealTek RTL8139DL 10/100 Mbps LAN

Provides Wireless LAN Module (option)

Drive Bay

1 x 2.5" HDD space

1 x Slim CD-ROM space

Storage

1 x Type II CF socket

Watchdog Timer

Software programmable time-out intervals from 1~255 sec. or 1~255 min.

Dimensions (LxHxW)

45.0 x 37.0 x 6.1 cm

Cut Out Size (LxH)

40.4 x 32.4 cm

Operation/Storage Temperature

0~+45 degrees C/-20~+70 degrees C

EMC

FCC/CE

Front Panel Protection

IP65 compliance

Power Adapter

12V DC in 60W adapter or +10~+30V DC power in

Display

LCD Size

17"

Max Resolution

1280 x 1024 pixels

Brightness (cd/m²)

300 cd/m² (center, Typ) @ 7.5mA

Contrast Ratio

800:1

LCD Color

16.7M colors (RGB 6-bits + FRC data)

Pixel Pitch (mm)

0.264 x 0.264

Touch Screen


17" IR

I/O Interface

External I/O

4 x COM, 2 x USB2.0, 2 x LAN, CF, PS/2 KB/MS, VGA, MIC In, Line Out

Rear I/O



01. COM 1	06. USB2.0 * 2	11. MIC In
02. COM 2	07. LAN * 2	12. Line Out
03. COM 3	08. CF	13. DC Adapter In
04. COM 4	09. KB/MS	14. +10~+30V DC In
05. Reset Button	10. VGA	15. Main Power ON/OFF

Ordering Guide

BPF-3017-E03

17" Panel PC w/TFT Panel, IR Touch Screen, HS-2615(w/1GHz CPU, CF), 12V DC Adapter

Accessory Options

Table Top Metal Stand, Memory Module, CF Module, Wireless LAN Module, 2.5" HDD, Slim CD-ROM