

LM10V332

Color STN-LCD Module
(FA/POS/Measuring instruments)

Features

- 26 cm [10.4"] VGA format
- Cost effective Color STN LCD
- High contrast (50 : 1)

Specifications


Parameter		Unit
Display size	26 [10.4]	cm ["]
Dot format (H x V)	640 x RGB x 480	dot
Dot pitch (H x V)	0.11 x 0.33	mm
Active area (H x V)	211.2 x 158.4	mm
Panel type	*1	-
Panel mode	Transmissive	-
Contrast ratio	50 : 1	-
Response Time	300	ms
Brightness	160	cd/m ²

Parameter		Unit
Backlight type	1CCFT(E) ²	-
Duty Ratio	1/240	-
Logic voltage	5.0 Vcon	V
Power consumption	3 310	mW
Outline dimensions (W x H x D)	264.0 x 193.6 x 8.5	mm
Weight	450	g
Operating temperature	0 to +40	°C
Storage temperature	-25 to +60	°C

*1...Triple Super Twisted Nematic

*2...Long life (15000 h[*min.*] 25000 h [*typ.*])

Outline Dimensions

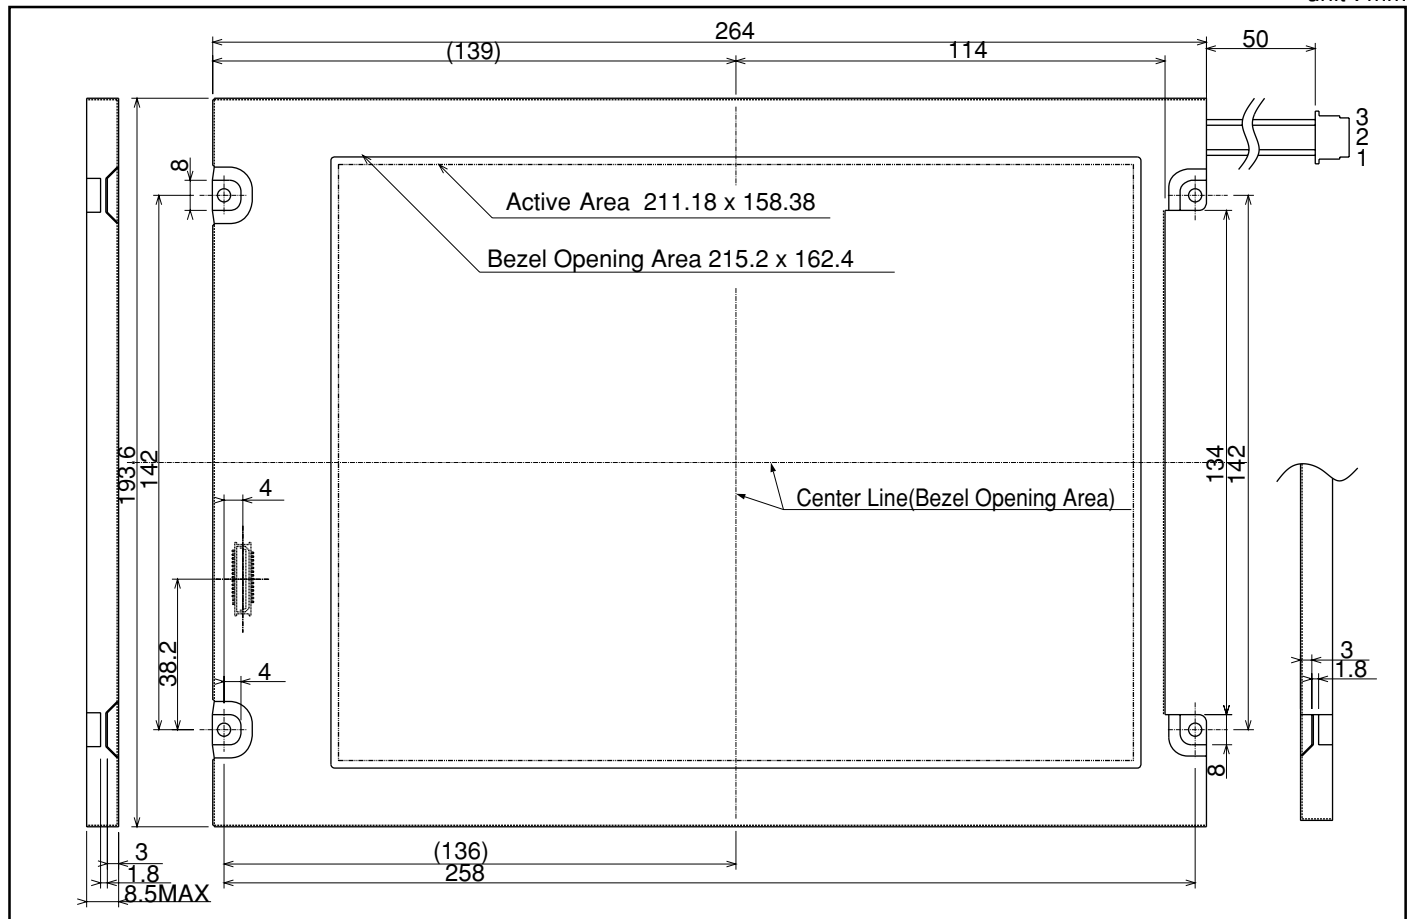

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Suggested applications (if any) are for standard use; See Important Restrictions for limitations on special applications. See Limited Warranty for SHARP's product warranty. The Limited Warranty is in lieu, and exclusive of, all other warranties, express or implied. ALL EXPRESS AND IMPLIED WARRANTIES, INCLUDING THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR USE AND FITNESS FOR A PARTICULAR PURPOSE, ARE SPECIFICALLY EXCLUDED. In no event will SHARP be liable, or in any way responsible, for any incidental or consequential economic or property damage.

SHARP®

NORTH AMERICA

SHARP Microelectronics
of the Americas
5700 NW Pacific Rim Blvd.
Camas, WA 98607, U.S.A.
Phone: (360) 834-2500
Fax: (360) 834-8903
<http://www.sharpsma.com>

EUROPE

SHARP Microelectronics Europe
Sonninstraße 3
20097 Hamburg, Germany
Phone: (49) 40 2376-2286
Fax: (49) 40 2376-2232
<http://www.sharpsme.com>

ASIA

SHARP Corporation
Integrated Circuits Group
2613-1 Ichinomoto-Cho
Tenri-City, Nara, 632, Japan
Phone: +81-743-65-1321
Fax: +81-743-65-1532
<http://www.sharp.co.jp>