

LKM-926G/9268G



15" LCD Monitor/ Keyboard/ Mouse/ Speak/ KVMA switch 5-in-1 1U Height Drawer

No special cables required to connect up to 8 computers!
Five functions: LCD monitor, keyboard, mouse, speaker and KVMA switch



LKM-9268G

Two self-click prevents the keyboard from sliding in shaking



No special cables required, up to 8 computers connection!

Main Features

- ◆ Outstanding LCD Module : Channel change control, auto scan control, programmable station name.
- ◆ Supports Daisy Chain Function
- ◆ KVMA Switch :8 port KVMA switch can be manually or automatically set via LCD module
- ◆ Standard support of English version keyboard. Optional Japanese, German, French, Italian version keyboard support.
- ◆ Embedded speaker can support alarm warning notice or audio application
- ◆ Hot Pluggable - Add or remove computers without having to power down the switch

You can control and access multiple computers from a central user console instead of moving from one to another.

It saves hundreds of dollars in equipment, space, and power costs. There is no need to have additional peripherals for each computer. Installation is as simple as connecting cables between the LKM-9268 switch and your computers.

This is ideal for an Internet data center, server room, testing lab, and network-operating center where multiple computers are required.


Specification

- ◆ 1U Height designed to save RACK space
- ◆ 15" TFT Color LCD display
 - Resolution: 1024 x 768
 - Brightness: 350 cd/m²
 - LCD MTBF: 50000 hrs
- ◆ 88 standard keys with slim size keyboard, supports English, Japanese, German, French, Italian keyboard
- ◆ Touch pad with two key buttons
- ◆ Alarm / Audio function available via two internal speakers (1W, with audio on/off switch)
- ◆ Built-in OSD (On Screen Display) for user adjustments, including H/V position, Color, Size, ...etc
- ◆ The front panel of LKM-9268A has two self-clickings with lock
- ◆ Power Supply:
 - Built-in universal AC input adapter, 100VAC ~ 240VAC input, 12V@3.8A output
 - ACE-N023T, 36VDC ~ 72VDC input, 12V@2A output
 - ACE-N023C, 20VDC ~ 30VDC input, 12V@2A output
- ◆ Color: Standard color are Black (PANTONE Black C) or White (PANTONE 413C)
- ◆ Vibration: 5~17Hz, 0.1" double amplitude displacement
17~640Hz, 1.5G acceleration peak to peak
- ◆ Shock: 10G acceleration peak to peak (11ms)
- ◆ Depth: 525 mm
- ◆ Operation temperature: 0~50°C
- ◆ Relative Humidity: 5-95%, non-condensing



Outstanding LCD Module
. Display station number
. Auto scan or user manually selected setting

Dimensions

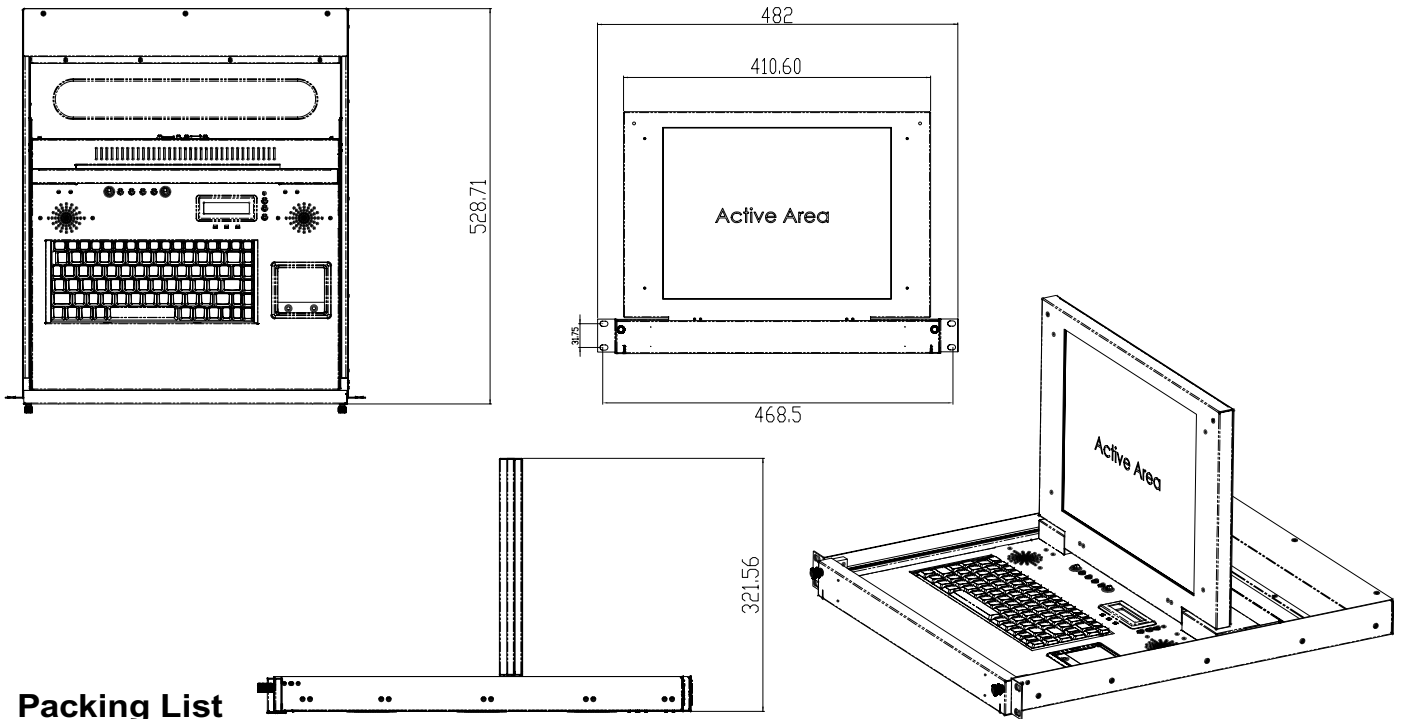

Packing List

- 2 x RACK Mount bracket. spcc (P/N: 41020-009501-00-RS)
- 2 x RACK Mount bracket. spcc (P/N: 41020-009001-01-RS)
- 1 x 175cm round cable power cord (P/N: 32000-000002-RS)
- 1 x Power supply. UP04501E-12P64L.45 watt AC/DC Adapter.90 VAC to 264 VAC,W/core (P/N: 63UP0451E12P64L-000-RS)
- 1 x 1.8M Cable Set, Include VGA, Keyboard, Mouse, Audio Cable (P/N: LKM-CB18A-RS)

Ordering Informations

- **LKM-926G** C - L :
Single Input 15" LCD/Keyboard/Mouse/Speaker 1U drawer includes 1.1M length cable set.AC Input
- **LKM-926G** C **T** - L :
Single Input 15" LCD/Keyboard/Mouse/Speaker 1U drawer includes 1.1M length cable set. 48VDC input
- **LKM-926G** C - **C** - L :
Single Input 15" LCD/Keyboard/Mouse/Speaker 1U drawer includes 1.1M length cable set. 24VDC input

- **LKM-9268G** C - L :
8 input 15" LCD/Keyboard/Mouse/Speaker 1U drawer, AC input
- **LKM-9268G** C **T** - L :
8 input 15" LCD/Keyboard/Mouse/Speaker 1U drawer, 48VDC input
- **LKM-9268G** C - **C** - L :
8 input 15" LCD/Keyboard/Mouse/Speaker 1U drawer, 24VDC input

C Color Code B: Black W: White

L Language Code

EN:English, JP:Japanese,DE:German, FR:French, IT:Italian, TW:Traditional Chinese, SP:Spanish, RU:Russian

Optional

- **LKM-CB18A-RS** 1.8M cable set; includes VGA, Keyboard, Mouse and Audio cable.
- **LKM-CB30A-RS** 3.0M cable set; includes VGA, Keyboard, Mouse and Audio cable.
- **LKM-CB50A-RS** 5.0M cable set; includes VGA, Keyboard, Mouse and Audio cable.



LKM-CBXXA