


# AR-B1662L3

6.57" x4.82"

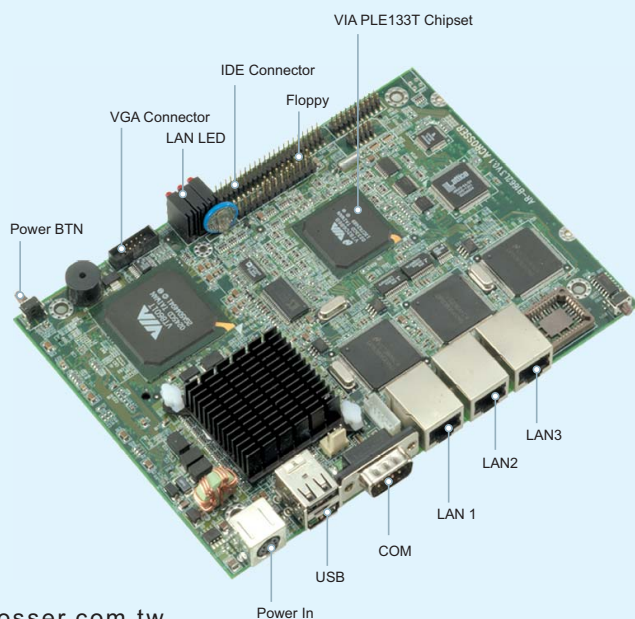

Xfire.acrosser.com.tw

## Features

**Internet Security EPC with VIA Eden CPU, 3LANs, Compact Flash , Mini-PCI, USB**

VIA >

2 USB >

3 LAN >

2 COM >

CF >

Mini PCI >

## Specification

### System:

CPU	On-board VIA Eden 400 MHz
Chipset	VIA PLE133T+VT82C686B
System Memory	One SO-DIMM socket, supports up to 512MB memory
BIOS	AMI
SSD	One Compact Flash Type I socket
Watchdog Timer	Software programmable 1~63 seconds
Expansion Interface	One 3.3V Mini PCI connector
Battery	Lithium 3V/48mAH
Power Requirement	+5V @ 3 A, +12V@ 0.5 A
Dimension	167mm x 122.5 mm (6.5" x 4.8")
Operating Temperature	0~60°C(32~140°F)
Storage Temperature	-20~80°C(-4~176°F)
Operating Humidity	0% ~ 90% Relative humidity non-condensing

### I/O:

Main IO	1xE-IDE, PS/2 (KB/Mouse), 2xRS232(9 pin D-SUB/5 x 2 pin)
Ethernet	NS 83816 x 3 , 10/100Mbps Base-T, RJ45 connector
USB	2 (USB 1.1 compliant)
GPIO	One TTL 8-bit input and output

### Packing list:

Part No.	Utility CD, Manual
----------	--------------------

## Ordering Information

### Standard:

AR-B1662 L3	Internet Security EPC with VIA Eden 400MHz CPU , 3LANs, Compact Flash, Mini-PCI, USB
-------------	--

### Option:

190030213	HDD Cable
190030158-01	VGA Cable
190030159	Keyboard/Mouse Cable

Specifications are subject to change without notice.