


BBS-2012

Fanless, Box PC with VIA V4 Eden 1GHz or ULV Intel® C-M 600MHz, CF, 5V/12V DC Adapter

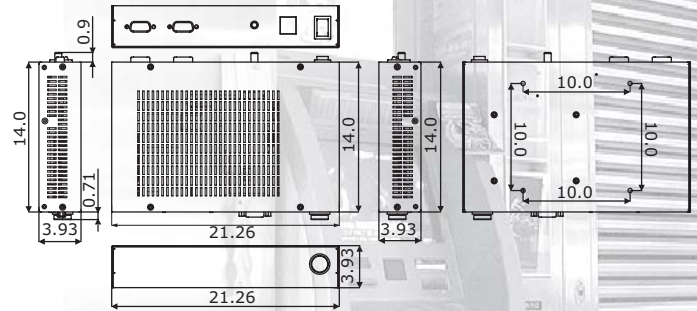

Features


- Fanless, box PC design
- BBS-2012-G w/HS-2615+VIA V4 Eden 1GHz CPU, 5V/12V DC adapter, CF, 2 x COM, 4 x USB2.0
- BBS-2012-V w/HS-2616M+ULV Intel® C-M processor, 5V/12V DC adapter, CF, 2 x COM, 4 x USB2.0
- 1 x 2.5" HDD space
- Option for Wireless LAN module

Mechanical

- Dimensions (LxHxW)**
21.26 x 3.93 x 14.0 cm
- Operation/Storage Temperature**
0~+45 degrees C/-20~+70 degrees C
- EMC**
FCC/CE
- Power Adapter**
5V/12V DC in 42W adapter

System


- BBS-2012-G**
SBC Model
HS-2615
CPU
VIA V4 Eden 1GHz CPU
BIOS
Award PnP Flash BIOS
System Chipset
VIA CX700(M)
System Memory
1 x 200-pin SO-DIMM socket up to 1GB DDR2 SDRAM
Display Chipset
VIA CX700(M)
Ethernet Chipset
Dual RealTek RTL8139DL 10/100 Mbps LAN
Provides Wireless LAN module (option)
Drive Bay
1 x 2.5" HDD space
Storage
1 x Type II CF socket
Watchdog Timer
Software programmable time-out intervals from 1~255 sec. or 1~255 min.
External I/O
4 x USB2.0, 2 x COM, 2 x LAN, CF, PS/2 KB/MS, VGA
Rear I/O

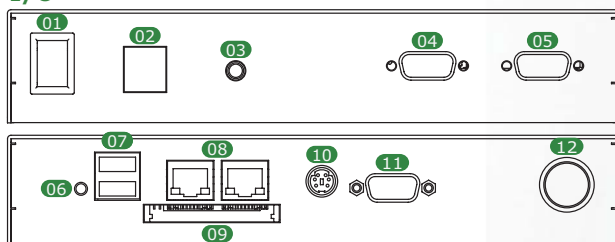

- | | | |
|-----------------------|------------------|-------------------|
| 01. Main Power ON/OFF | 05. COM 2 | 09. CF |
| 02. USB2.0 * 2 | 06. Reset Button | 10. KB/MS |
| 03. WLAN ANT | 07. USB2.0 * 2 | 11. VGA |
| 04. COM 1 | 08. LAN * 2 | 12. DC Adapter In |

BBS-2012-V

- SBC Model**
HS-2616M
CPU
ULV Intel® Celeron® M processor 600MHz/512K
BIOS
AMI PnP Flash BIOS
System Chipset
Intel® 852GM/ICH4
System Memory
1 x 200-pin SO-DIMM socket up to 1GB DDR SDRAM
Display Chipset
Intel® 852GM
Ethernet Chipset
Intel® 82551QM and 82562ET dual 10/100 Mbps LAN
Provides Wireless LAN module (option)
Drive Bay
1 x 2.5" HDD space
Storage
1 x Type II CF socket
Watchdog Timer
Software programmable time-out intervals from 1~255 sec. or 1~255 min.
External I/O
4 x USB2.0, 2 x COM, 2 x LAN, CF, PS/2 KB/MS, VGA
Rear I/O

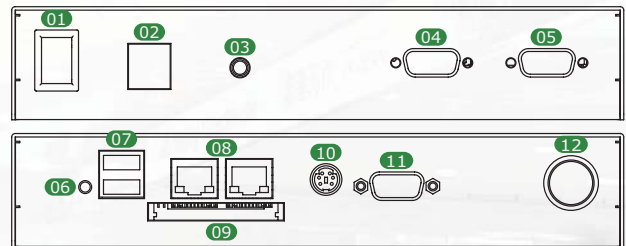

- | | | |
|-----------------------|------------------|-------------------|
| 01. Main Power ON/OFF | 05. COM 2 | 09. CF |
| 02. USB2.0 * 2 | 06. Reset Button | 10. KB/MS |
| 03. WLAN ANT | 07. USB2.0 * 2 | 11. VGA |
| 04. COM 1 | 08. LAN * 2 | 12. DC Adapter In |

Ordering Guide

- BBS-2012-G0**
Fanless, Box PC with HS-2615(w/1GHz CPU, CF), 5V/12V DC Adapter
- BBS-2012-V0**
Fanless, Box PC with HS-2616M(w/600MHz CPU, CF), 5V/12V DC Adapter

Accessory Options

Memory Module, CF Module, Wireless LAN Module, 2.5" HDD