


HS-5620

Pentium MMX ISA Bus SBC with CRT/Panel, Audio & 4COM

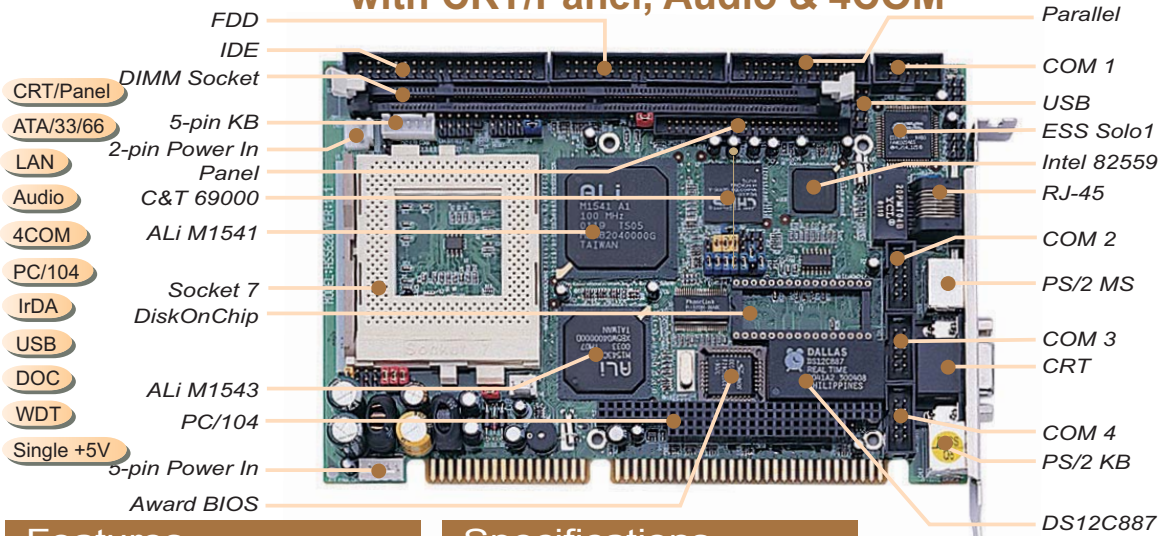

Features

- ✔ 75~500MHz CPU for Intel Pentium MMX/Tillamook/K5/K6
- ✔ ALi M1541/M1543 system chipset
- ✔ One DIMM socket with a max. capacity of 256MB
- ✔ SMC 37C669 super I/O chipset
- ✔ Fast PCI ATA/33/66 IDE controller
- ✔ Four RS-232 serial ports
- ✔ PC/104 Bus connector
- ✔ C&T 69000 CRT/Panel display controller
- ✔ Intel 82559 10/100 Based LAN
- ✔ ESS Solo1 3D audio controller
- ✔ DiskOnChip socket supporting memory sizes of up to 288MB
- ✔ Supports ATX power function
- ✔ Supports Single +5V power in

Specifications

- * **CPU:** 75~500MHz CPU for Intel Pentium MMX/Tillamook/K5/K6
- * **Bus Interface:** ISA Bus
- * **Memory:** One DIMM socket supporting up to 256MB
- * **Cache Memory:** 512KB pipeline burst
- * **Chipset:** ALi M1541/M1543
- * **I/O Chipset:** SMC 37C669
- * **VGA:** C&T 69000 with 2MB memory supporting CRT/Panel displays up to 1280 x 1024 at 256 colors
- * **IDE:** Two IDE disk drives supporting ATA/33/66 with transfer rates up to 33/66MB/sec.
- * **FDD:** Supports up to two floppy disk drives
- * **Parallel:** One enhanced bi-directional parallel port supporting SPP/ECP/EPP
- * **LAN:** Intel 82559 10/100 Based LAN
- * **Audio:** ESS Solo1 3D audio controller
- * **Serial Port:** 16C550 UART-compatible RS-232 x 4 serial ports with 16-byte FIFO
- * **PC/104:** PC/104 connector for 16-bit ISA Bus

- * **IrDA:** One IrDA TX/RX header
- * **USB:** Two USB connectors
- * **Keyboard:** PS/2 6-pin Mini DIN or 5-pin connector
- * **Mouse:** PS/2 6-pin Mini DIN
- * **DiskOnChip:** DiskOnChip socket supporting memroy sizes of up to 288MB
- * **BIOS:** Award PnP Flash BIOS
- * **Watchdog Timer:** Sets 1, 2, 10, 20, 110, 220 seconds activity trigger with Reset or NMI
- * **CMOS:** DS12C887 or equivalent device
- * **DMA Channels:** 7
- * **Interrupt Levels:** 15
- * **Power:** +5V
- * **Extra Power Connector:** One 5-pin connector
- * **Maximum Power Consumption:** +5V@3.9A
- * **Operating Temperature:** 0~60° C
- * **Board Size:** 18.5 x 12.1 cm

Ordering Guide

- ◎ HS-5620
Pentium MMX ISA Bus SBC with
CRT/Panel, LAN & Audio
- ◎ HS-5620P
Pentium MMX ISA Bus SBC

Specifications are subject to change without notice.

The Industrial PC Authority



Architectural Expertise
Beyond IPC

BOSER Technology Co., Ltd.

15F-6, No. 77, Hsin Tai Wu Road, Sec. 1, Hsichih, Taipei Hsien 221 Taiwan TEL : 886-2-26983333 FAX : 886-2-26983300
<http://www.boser.com.tw> <http://www.isb.com.tw> E-Mail: webmaster@boser.com.tw

U.S.A.
TEL : +1 650 4280868
FAX : +1 650 4281172

U.K.
TEL : +44 1543 466552
FAX : +44 1543 466553

JAPAN
TEL : +813 34248120
FAX : +813 34180521

FRANCE
TEL : +33 1 69061790
FAX : +33 1 69433732

SHANGHAI
TEL : 021 62789292
FAX : 021 62789393

GERMANY
TEL : +49 221 954790
FAX : +49 221 9547988

KOREA
TEL : +82 2 34737862
FAX : +82 2 34743120

ISRAEL
TEL : +972 3 9203456
FAX : +972 3 9203535

FINLAND
TEL : +358 2 6203753
FAX : +358 2 6203770

BEIJING
TEL : 010 82660235
FAX : 010 82660241