





# Motherboards

Intel® Core™2 Duo-Based

Socket P Intel® Core™2 Duo Mini-ITX Motherboard w/ Intel® GM45 Chipset

- 1 Motherboards
- 2 Disk-Size SBDS
- 3 CPU Modules
- 4 PC/I/O Plus
- 5 CPU Card
- 6 Embedded Systems
- 7 Network Security Appliance

## MI945

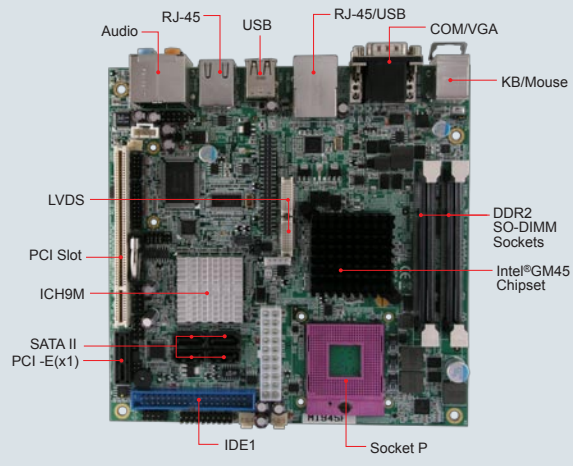

### Features

- Supports Intel® Core™2 Duo processors 667/800/1066MHz FSB
- 2x DDR2 SO-DIMM, Max. 8GB
- Onboard dual Gigabit LAN
- Integrated VGA for CRT & LVDS
- 4x SATA II, 8x USB 2.0, 4x COM, 1x IDE, 1x CF
- 1x PCI, 1x PCI-E(x1), 1x Mini PCI-E

### System

CPU Socket	Socket P for Intel® Core™2 Duo processors
System Memory	2x DDR2 SO-DIMM, 667/800MHz, Max. 8GB
System Chipset	Intel® GM45 + ICH9M (MI945F) / ICH9ME (MI945RF/MI945AF), 667/800/1066MHz FSB
BIOS	Award (MI945F/MI945RF) / AMI (MI945AF)
Watchdog Timer	256 levels
SSD	CF socket (solder side)
H/W Monitor	Yes
Expansion Slots	1x PCI, 1x PCI-E(x1), 1x Mini PCI-E

### Mechanical and Environmental

Dimensions	170mm x 170mm (6.7" x 6.7")
Max. Power Requirement	Intel® Core™2 Duo T9400 2.53GHz w/ 2GB DDR2-667 +12V: 2.01A, +5V: 0.45A, +3.3V: 0.82A
Operating Temperature	0°C~60°C (32°F~140°F)
Storage Temperature	-20°C~80°C (-4°F~176°F)
Relative Humidity	10%~90% (non-condensing)

### Graphics

VGA Controller	Intel® GM45 integrated GMA 4500MHD
VGA Memory	Supports DVMT 5.0; Max. shared memory - 1GB
Display Interface	Supports CRT & 18-bit/24-bit dual channel LVDS, optional daughter card supports 2nd CRT and single/dual DVI

### Ethernet


Controller	ICH9M integrated Intel® 82567LM Gigabit LAN Intel® 82574L PCI-E Gigabit LAN for 2nd LAN
Connector	RJ-45 on board

### Multi I/O

Chipset	Winbond W83627DHG-P + Fintek 81216G 1x IDE, 1x KB, 1x mouse, 3x RS232, 1x RS-232/422/485, 4x SATA II
USB	4 ports on board Pin header for 4 ports (USB 2.0)
Audio	Intel® ICH9M built-in HD audio w/ Realtek ALC888 codec for 7.1CH
Others	Digital I/O (4 in, 4 out)

### Ordering Information

MI945F	Socket P GM45 Mini-ITX motherboard with VGA and dual Gigabit LAN (ICH9M)
MI945AF	Socket P GM45 Mini-ITX motherboard with VGA, dual Gigabit LAN, RAID, iAMT 4.0 (ICH9ME)
MI945RF	Socket P GM45 Mini-ITX motherboard with VGA, dual Gigabit LAN and RAID (ICH9ME)
AMI200-945F-D1	Aluminum System with MI945F, Intel® T9400 (2.53GHz) CPU, 4GB DDR2 SO-DIMM, 2.5" 80GB HDD, ID450 converter, ID392-R DVI, 80W Power
AMI200-945AF-D1	Aluminum System with MI945AF, Intel® T9400 (2.53GHz) CPU, 4GB DDR2 SO-DIMM, 2.5" 80GB HDD, ID450 converter, ID392-R DVI Board, 80W Power, iAMT 4.0
AMI401-945FC-D1	Aluminum Chassis for MI945F, 2.5" HDD holder, ID450 converter, 150W Power
AMI401-945F-D1	Aluminum System with MI945F, Intel® T9400 (2.53GHz) CPU, 4GB DDR2 SO-DIMM, 2.5" 80GB HDD, ID450 converter, 150W Power



- Remarks:
1. For optional daughter boards and riser cards, please refer to page 19-20.
  2. Specifications are subject to change without prior notice.