


# Power Supplies

## 24/48 VDC power supplies for installation on a DIN-Rail

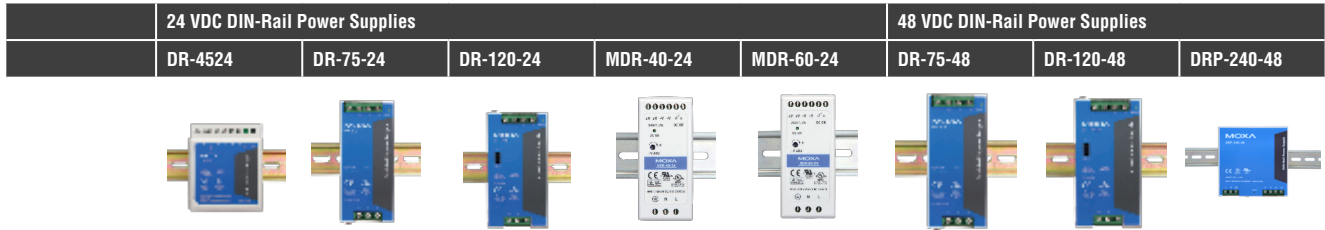

24 VDC DIN-Rail Power Supplies					48 VDC DIN-Rail Power Supplies			
	DR-4524	DR-75-24	DR-120-24	MDR-40-24	MDR-60-24	DR-75-48	DR-120-48	DRP-240-48
<b>Physical Characteristics and Temperature Limits</b>								
Dimensions (mm)	78 x 67 x 93	55.5 x 100 x 125.2	65.5 x 100 x 125.2	40 x 90 x 100	40 x 90 x 100	55.5 x 100 x 125.2	65.5 x 100 x 125.2	125.5 x 125.5 x 100
Weight	400 g	550 g	650 g	260 g	280 g	550 g	650 g	1.2 kg
Operating Temperature	-10 to 50°C (14 to 122°F)	-10 to 60°C (14 to 140°F)		-20 to 70°C (-4 to 158°F)		-10 to 60°C (14 to 140°F)		-10 to 70°C (14 to 158°F)
Relative Humidity	20 to 90% RH	20 to 90% RH		20 to 90% RH		20 to 90% RH		
<b>Power Requirements</b>								
Wattage	45 W	75 W	120 W	40 W	60 W	75 W	120 W	240 W
Input	85-264 VAC (47-63 Hz), or 120-370 VDC		88-132 VAC, or 176-264 VAC (47-63 Hz) by switch, or 248-370 VDC	85-264 VAC (47-63 Hz) or 120-370 VDC		85-264 VAC (27-63 Hz) or 120-370 VDC	88-132 VAC, or 176-264 VAC (47-63 Hz) by switch, or 248-370 VDC	85-264 VAC (47-63 Hz) or 120-370 VDC
Output	48 W (24 VDC @ 0-2 A)	76.8 W (24 VDC @ 0-3.2 A)	120 W (24 VDC @ 0-5 A)	40 W (24 VDC @ 0-1.7 A)	60 W (24 VDC @ 0-2.5 A)	76.8 W (48 VDC @ 0-1.6 A)	120 W (48 VDC @ 0-2.5 A)	240 W (48 VDC @ 0-5 A)
Over-voltage Protection	27.6-32.4 V	29-33 V		31.2-36 V		58-65 V		
Overload Protection	105-150%							
Type	Constant Current Limiting							
Reset	Auto Recovery							
Inrush Current	30 A and 115 V, or 60 A and 230 V							
<b>Reliability</b>								
Safety Standards	EN 60950-1, UL 508 approved							
EMC Standards	EN 55022 Class B, EN 61000-4-2/3/4/5/6/8/11, ENV 50204, EN 61000-3-2, EN 50082-2							
Warranty	3 years (see <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a> )							

### Ordering Information

#### 24 VDC DIN-Rail Power Supplies

**DR-4524:** 45W/2A DIN-Rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 50°C operating temperature

**DR-75-24:** 75W/3.2A DIN-Rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 60°C operating temperature

**DR-120-24:** 120W/5A DIN-Rail 24 VDC power supply with universal 88 to 132 VAC or 176 to 264 VAC input by switch, or 248 to 370 VDC input, -10 to 60°C operating temperature

**MDR-40-24:** 40W/1.7A DIN-Rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -20 to 70°C operating temperature

**MDR-60-24:** 60W/2.5A DIN-Rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -20 to 70°C operating temperature

#### 48 VDC DIN-Rail Power Supplies

**DR-75-48:** 75W/1.6A DIN-Rail 48 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 60°C operating temperature

**DR-120-48:** 120W/2.5A DIN-Rail 48 VDC power supply with universal 88 to 132 VAC or 176 to 264 VAC input by switch, or 248 to 370 VDC input, -10 to 60°C operating temperature

**DRP-240-48:** 240W/5A DIN-Rail 48 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 70°C operating temperature