


IEC-285A

19" 2U Rackmount Chassis for ATX Motherboard




64-bit
Solution

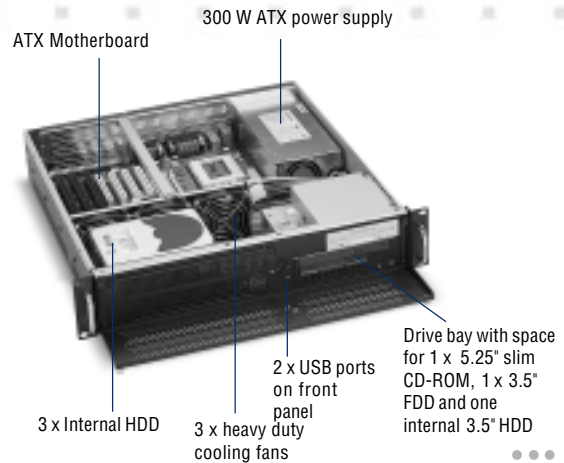

Specifications

- **Construction:** Heavy-duty steel chassis
- **Color:** Black
- **Disk Drive Bay:**
 - 5.25" Drives: 1 x Slim CD-ROM
 - 3.5" Drives: 1 x 3.5" FDD, 4 x 3.5" HDD (internal)
- **Fan No.:** 3 x 8cm Fans
- **CFM:** 42.5 CFM/each
- **Air Filter:** Replaceable
- **Controls on Front Panel:** Power On/Off , RESET button
- **Indicators on Front Panel:** Power On, HDD activity
- **Extension Port:** 2 x USB ports on front panel
- **EMI:** FCC/VDE Class A
- **Operating Humidity:** 0~45°C (0~75°C non-operating)
- **Relative Humidity:** 10 to 95%, @25°C, non-condensing
- **Dimension (W x H x D):** 483 x 89 x 450 mm (19" x 3.5" x 17.7")
- **Carton Dimension (W x H x D):** 633 x 248 x 59 mm (24.9" x 9.8" x 23.2")
- **Net Weight:** 14 kg (31 lb)
- **Gross Weight:** 15 kg (33 lb)

Dimension Diagram

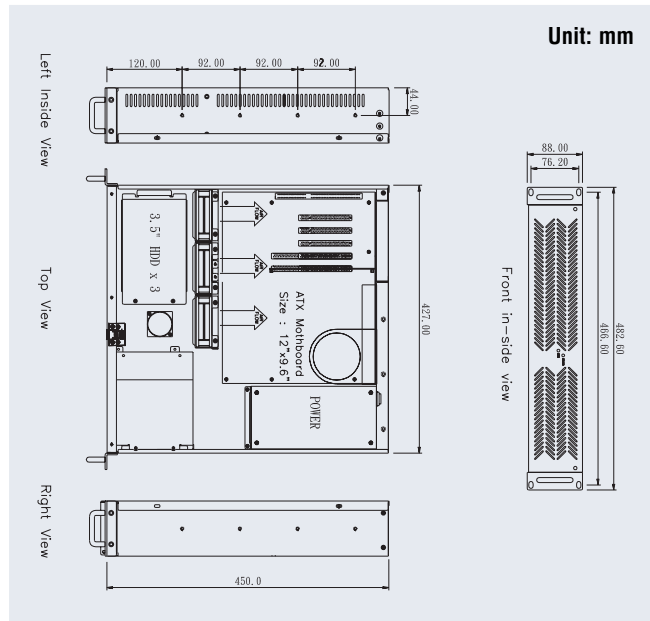

Backplanes

Model Name	System	Amount of Slots
PBR-5SG-32	Single	3x32 bit PCI Slot
PBR-5SG-64 (5.0V)	Single	3x64 bit PCI Slot (5.0V)
PBR-3SG-64 (3.3V)	Single	3x64 bit PCI Slot (3.3V)

Power Supplies

Model Name	Watt	Input Range	Output Voltage	Min. Load
IPS-SPX-6300A2	300	115V/230 VAC@ (ATX) 47-63 Hz Auto-Switching	+3.3V@30A +5V@30A +12V@16A -5V@0.5A -12V@1.0A	+5V@1A

Ordering Information

IEC-285A-R03C-AX300

19" 2U Rackmount Chassis for ATX Motherboard with 3-slot 64-bit 3.3V PCI Riser Card and 300W ATX Power Supply