

IPC-610-L

4U 15-Slot Rackmount Chassis with Front-Accessible Fan



Features


- Supports an ATX motherboard or a backplane with up to 15 slots
- Shock-resistant disk drive bay design holds up to three 5.25" and one 3.5" disk drives
- Supports front-accessible dual USB ports
- Power and HDD activity notification improves system availability
- Easy-to-maintain system fan with filter without opening the top cover
- Lockable front door prevents unauthorized access

Specifications

Drive Bay	3.5"	Front-accessible
	5.25"	1
Cooling	Fan	1 (12 cm / 85 CFM)
	Air Filter	Yes
Miscellaneous	LED Indicators	Power and HDD activity
	Control	Power switch and system reset button
	Rear Panel	Backplane version: One D-Sub 9-pin opening Motherboard version: Five D-Sub 9-pin & one 68-pin SCSI openings
Environment	Temperature	Operating: 0 ~ 40° C (32 ~ 104° F) Non-Operating: -20 ~ 60° C (-4 ~ 140° F)
	Humidity	10 ~ 85% @ 40° C, non-condensing 10 ~ 95% @ 40° C, non-condensing
	Vibration (5 ~ 500 Hz)	1 Grms 2 G
	Shock	10 G (with 11 ms duration, 1/2 sine wave) 30 G
	Physical Characteristics	Dimensions (W x H x D) Weight

Dimensions

Unit: mm [inch]

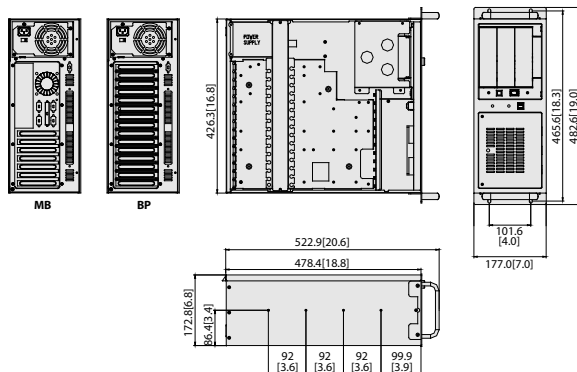

Ordering Information

Part Number	Power Supply
Backplane Version	
IPC-610BP-00LBE	Without power supply, with ATX switch
Motherboard Version	
IPC-610MB-00LBE	Without power supply, with ATX switch

Power Supply Options

Part Number	Specifications	
	Watts	Input
PS-250ATX-ZE (ATX, PFC)	250 W	AC 115/230 V (selectable)
PS-300ATX-ZBE (ATX, PFC)	300 W	AC 100 ~ 240 V (full-range)

Optional Accessories

Part Number	Description
2130006149S000	Fan filter 127 x 127 x 5 mm
2130004802S000	Door filter 142 x 97 x 5 mm