


BBS-3015

Heavy Duty, High Speed, Fanless PC with CF, Slim CD-ROM, 12V DC Adapter

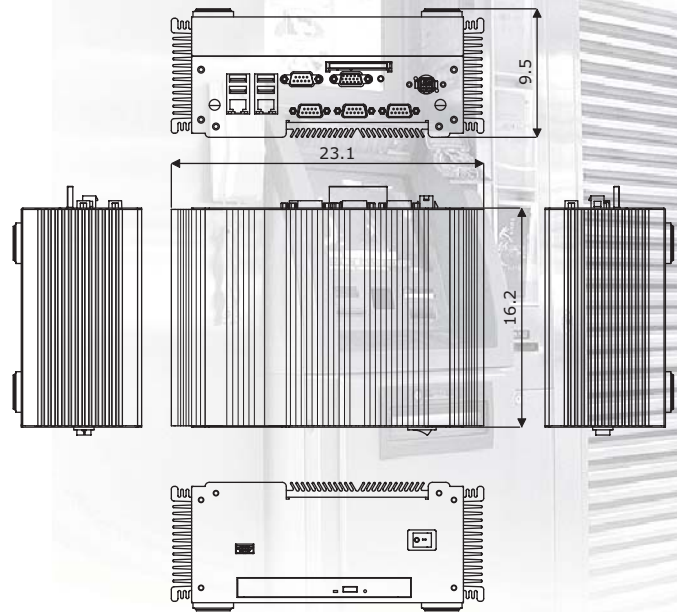

Features

- Heat pipe, fanless PC design
- Built-in HS-2610, 12V DC adapter
- Provides Intel® P-M/C-M processor (option)
- 1 x 2.5" HDD space, 1 x slim CD-ROM space
- BBS-3015-F provides CF, 4 x COM, VGA, CF, 2 x LAN
- Option for +10~+30V DC in solution
- Option for 5 x USB2.0 + WLAN Module or 6 x USB2.0

System

SBC Model

HS-2610

CPU

Intel® Pentium® M processor 1.6/1.8GHz or Intel® Celeron® M processor 1.5GHz (option)

BIOS

AMI PnP Flash BIOS

System Chipset

Intel® 852GME/ICH4

System Memory

1 x 200-pin SO-DIMM socket up to 1GB DDR SDRAM

Display Chipset

Intel® 852GME

Ethernet Chipset

Intel® 82551QM and 82562ET dual 10/100 Mbps LAN

Drive Bay

1 x 2.5" HDD space
1 x Slim CD-ROM space

Storage

1 x Type II CF socket

Watchdog Timer

Software programmable time-out intervals from 1~255 sec. or 1~255 min.

Mechanical

Thermal System

Heat pipe

Dimensions (LxHxW)

23.2 x 9.3 x 16.2 cm

Operation/Storage Temperature

0~+45 degrees C/-20~+70 degrees C

EMC

FCC/CE

Power Adapter


12V DC in 60W adapter or option +10~+30V DC power in

I/O Interface

External I/O

5 x USB2.0, 4 x COM, VGA, CF, 2 x LAN

Rear I/O

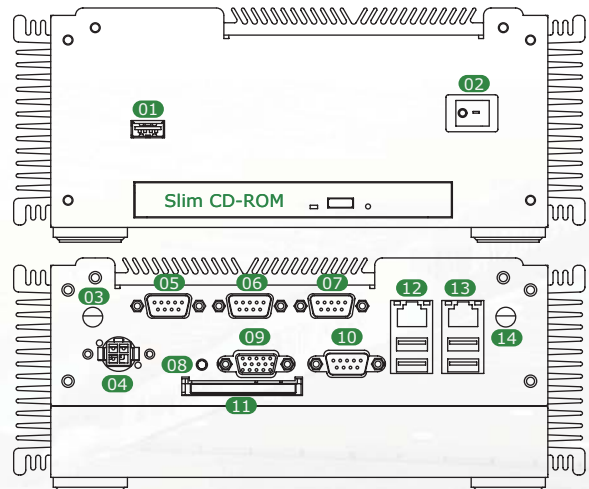

- | | | |
|-----------------------|------------------|-----------------------|
| 01. USB2.0 (option) | 06. COM 3 | 11. CF |
| 02. Main Power ON/OFF | 07. COM 4 | 12. LAN + USB2.0 * 2 |
| 03. WLAN ANT (option) | 08. Reset Button | 13. LAN + USB2.0 * 2 |
| 04. DC Adapter In | 09. VGA | 14. WLAN ANT (option) |
| 05. COM 2 | 10. COM 1 | |

Ordering Guide

BBS-3015-F/5 USB

Heat Pipe, Fanless PC with HS-2610(w/CF), 12V DC Adapter

BBS-3015-F/6 USB (by order)

Heat Pipe, Fanless PC with HS-2610(w/CF), 12V DC Adapter

Accessory Options

CPU, Memory Module, CF Module, 2.5" HDD, Slim CD-ROM, Wireless LAN Module (only for BBS-3015-F/5 USB)