



PCM-4335 STPC Client DX-66

LCD

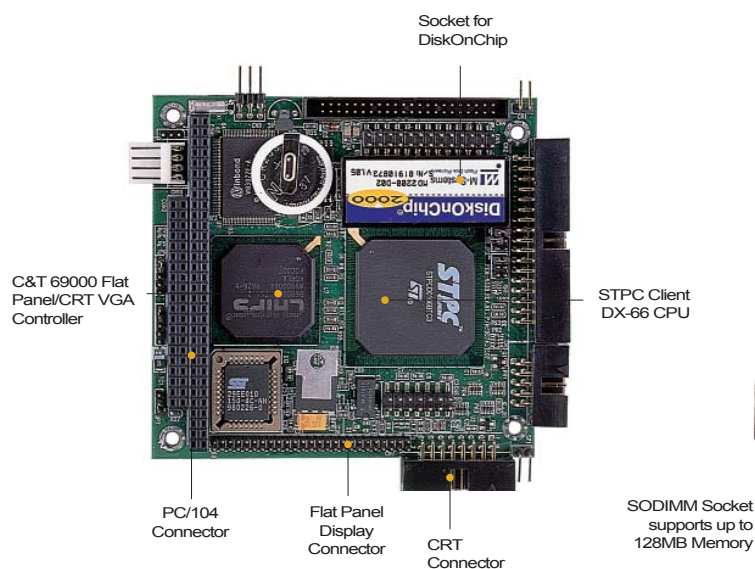

Features

- Onboard STPC Client DX-66 CPU
- C&T 69000 LCD controller supports 36-bit TFT Panels
- Onboard SODIMM socket supports up to 64MB EDO DRAM
- Onboard watchdog timer with selectable time-out interval

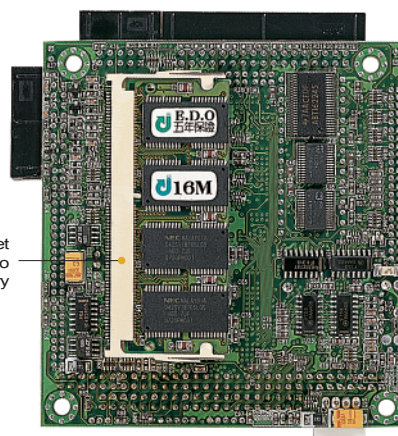

Specifications

System

- | | |
|-------------------------|--|
| ■ CPU | STPC Client DX-66 |
| ■ System Memory | Supports Fast Page Mode & EDO DRAM up to 64MB |
| ■ Chipset | STPC Client |
| ■ I/O Chipset | Winbond W83977F. Fully 16-bit I/O decoded |
| ■ BIOS | AMI 128KB FLASH BIOS |
| ■ SSD | Supports DiskOnChip® up to 1GB |
| ■ Watchdog Timer | Can generate a system reset. 0.5min/step |
| ■ Battery | Lithium battery |
| ■ DMA | 7 DMA channels (8237 equivalent) |
| ■ Interrupt | 15 interrupt levels (8259 equivalent) |
| ■ Power Supply Voltage | +5V (4.75V to 5.25V) |
| ■ Size/ Weight | 3.55" (L) x 3.775" (90mm x 96mm), 0.6lb (0.25kg) |
| ■ Operating temperature | 32°F to 140°F (0°C to 60°C) |

I/O

- | | |
|-------|---|
| ■ MIO | IDE x 1, FDD x 1, KB+Mouse x 1, RS-232 x 1, RS-232/422/485 x 1, Parallel ×1 |
|-------|---|

Display

- | | |
|-----------------|--------------------------------------|
| ■ Chip | C&T 69000 |
| ■ Memory Size | Built-in 2MB SDRAM |
| ■ Resolution | Up to 1024 x 768@ 16bpp colors |
| ■ LCD Interface | Up to 36-bit TFT/DSTN/MONO LCD panel |

Packing List

- IDE cable
- FDD cable
- Serial Port cable
- Parallel Port cable
- KB/Mouse cable
- CRT cable 9681433500
- Quick Installation Guide
- Utility CD