

# LKM-926G/9268G

15" LCD Monitor/ Keyboard/ Mouse/ Speak/  
KVMA switch 5-in-1 1U Height Drawer



No special cables required, up to 8 computers connection!

No special cables required to connect up to 8 computers!  
Five functions: LCD monitor, keyboard, mouse, speaker and KVMA switch



**LKM-9268G**  
Two self-click prevents the keyboard from sliding in shaking

## Main Features

1. Outstanding LCD Module : Channel change control, auto scan control, programmable station name.
2. KVMA Switch : 8 port KVMA switch can be manually or automatically set via LCD module
3. Standard support of English version keyboard. Optional Japanese, German, French, Italian version keyboard support.
4. Embedded speaker can support alarm warning notice or audio application
5. Hot Pluggable - Add or remove computers without having to power down the switch

## Specifications



1U Height designed to save RACK space

<b>Computer Connections</b>	LKM-926 Series = 1, LKM-9268 Series = 8
<b>LCD size</b>	15" high brightness TFT LCD
<b>Resolution (H x V)</b>	1024x768 (XGA)
<b>Luminance (cd/m<sup>2</sup>)</b>	350 cd/m <sup>2</sup>
<b>Display Color</b>	262K
<b>Pixel Pitch (mm)</b>	0.297
<b>Contrast Ratio</b>	400:1
<b>View Angle (H/V)</b>	120/100
<b>LCD MTBF</b>	50000 hrs
<b>Keyboard and Key Pad</b>	88 standard keys with stouch pad supports English, Japanese, German, French, Italian keyboard
<b>Alarm / Audio function</b>	Available via two internal speakers (1W, with audio on/off switch)
<b>OSD</b>	Built-in OSD (On Screen Display) for user adjustments, including H/V position, Color, Size, ...etc
<b>Power Adapter</b>	45W
<b>Color</b>	Standard color are Black (PANTONE Black C) or White (PANTONE 413C)
<b>Vibration</b>	5~17Hz, 0.1" double amplitude displacement 17~640Hz, 1.5G acceleration peak to peak
<b>Shock</b>	10G acceleration peak to peak (11ms)
<b>Temperature</b>	0°C ~ 50°C
<b>Humidity</b>	5-95%, non-condensing
<b>Dimensions (WxHxD mm)</b>	482 x 323.25 x 520
<b>LCM</b>	8 Port KVMA Models Only

## Packing List

2 x RACK Mount bracket. spcc (P/N: 41020-009501-00-RS)	2 x RACK Mount bracket. spcc (P/N: 41020-009001-01-RS)
1 x 1.8M Cable set, include VGA, Keyboard, Mouse, Audio Cable (P/N: LKM-CB18A-RS)	1 x Power supply. UP04501E-12P64L.45 watt AC/DC Adapter.90 VAC to 264 VAC, W/core (P/N: 63SPU45E201-000-RS)
1 x 175cm round cable power cord (P/N: 32000-000002-RS)	

## Dimensions

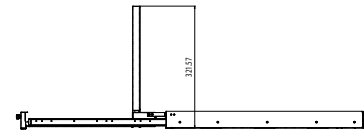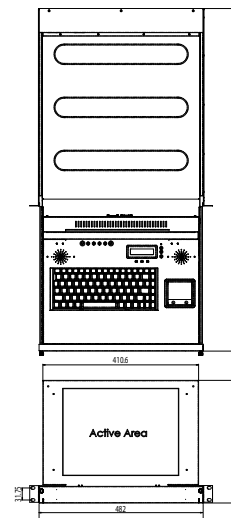

Outstanding LCD Module  
· Display station number  
· Auto scan or user manually selected setting

## Ordering Information

<b>LKM-926G [C] - [L]</b>	Single Input 15" LCD/Keyboard/Mouse/Speaker 1U drawer includes 1.1M length cable set.AC Input
<b>LKM-926G [C] T - [L]</b>	Single Input 15" LCD/Keyboard/Mouse/Speaker 1U drawer includes 1.1M length cable set. 48VDC input
<b>LKM-926G [C] - [C] - [L]</b>	Single Input 15" LCD/Keyboard/Mouse/Speaker 1U drawer includes 1.1M length cable set. 24VDC input
<b>LKM-9268G [C] - [L]</b>	8 input 15" LCD/Keyboard/Mouse/Speaker 1U drawer, AC input
<b>LKM-9268G [C] T - [L]</b>	8 input 15" LCD/Keyboard/Mouse/Speaker 1U drawer, 48VDC input
<b>LKM-9268G [C] - [C] - [L]</b>	8 input 15" LCD/Keyboard/Mouse/Speaker 1U drawer, 24VDC input

**C Color Code** B: Black W: White  
**L Language Code** EN: English, JP: Japanese, DE: German, FR: French, IT: Italian, TW: Traditional Chinese, SP: Spanish, RU: Russian

## Options

<b>LKM-CB18A-RS</b>	1.8M cable set; includes VGA, Keyboard, Mouse and Audio cable.
<b>LKM-CB30A-RS</b>	3.0M cable set; includes VGA, Keyboard, Mouse and Audio cable.
<b>LKM-CB50A-RS</b>	5.0M cable set; includes VGA, Keyboard, Mouse and Audio cable.



- 1 Application Server Platform
- 2 Single Board Computer
- 3 IBX Series POS PC
- 4 AFOLUX POS Panel PC
- 5 Video Capture Card
- 6 KAMIO RISC
- 7 IOVU Open HMI
- 8 VITO Universal Controller
- 9 DINO BLADE
- 10 LCD Product Series
- 11 Embedded System
- 12 Industrial Computer Chassis
- 13 Power Supply
- 14 Peripherals