


PCI/ISA Single Board Computer

LBC-9116

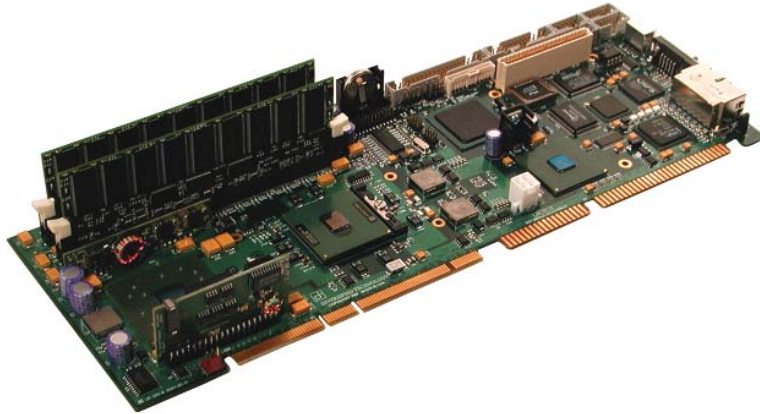

- Intel® Pentium®M Processor with speeds up to 2.0GHz and 2MB L2 Cache
- Intel® E7501 Chipset with 400MHz Front Side Bus
- Up to 4GB DDR200 SDRAM
- Video with 8MB for CRT and LVDS Flat Panel
- Dual Gigabit Ethernet
- Ultra ATA/100 EIDE and FDD
- Optional Ultra320 SCSI
- USB, Serial, and Parallel Ports
- ISA/PCI/PCI-X Bus Support

Offering outstanding performance at low power, Diversified Technology's LBC-9116 features a Pentium M processor and E7501 chipset, up to 2MB L2 cache, dual Gigabit Ethernet, and Ultra320 SCSI for thermally constrained communication and embedded computing applications.

The LBC-9116 features a high performance, low power Intel Pentium M processor with on-die Advanced Power Management including Enhanced Intel SpeedStep® technology including dynamic frequency/voltage control, up to 2MB L2 Advanced Transfer Cache Architecture, power-optimized 400MHz system bus, Micro-Ops Fusion and Dedicated Stack Manager, the Intel E7501 chipset, and up to 4GB Double Data Rate (DDR200) DIMMs on two sockets. Onboard are a high performance graphics controller with concurrent, independent CRT and LVDS display, dual 10/100/1000Base-TX Ethernet auto-negotiating controllers, PCI Ultra ATA/100 IDE interface, as well as Universal Serial Bus (USB 1.1) ports, serial/parallel ports, and floppy drive interface. An Ultra320 SCSI LVD/SE daughter card on the Hub Link 2.0 1GB/s bus is optional.

The LBC-9116 at 1.6GHz performs many applications comparable to 2.4GHz but with lower power (~24.5W) and supports onboard PCI and PCI-X (used by GbE) busses as well as an off-board PCI/32-bit/33MHz or 64-bit/66MHz buss. A PCI to ISA bridge supports ISA bus mastering with up to 20-slot drive capability. At only 1.48 inches wide, it is easily accommodated in 1U/2U platforms and 4U multisegmented passive backplane chassis.

The AMI BIOS, in field upgradeable Flash ROM, supports peripheral enable/disable, serial/parallel port re-mapping/disable, keyboard disable, and is PnP compliant onboard ISA interrupts. Other features include a hardware monitor (voltages, temperature, and fan), three-stage programmable watchdog timer, diagnostic LEDs, and a 2 year limited warranty.

The Intel Pentium M/E7501 combination delivers outstanding performance per watt and dynamic power control necessary for efficient operation in systems requiring high availability and energy conservation. Diversified Technology's LBC-9116 industrial PC is an ideal choice for application developers addressing TEMs, NEMs, broadcast/media, telecom, messaging/IVR/CTI, IC&A, instrumentation, medical/imaging, and COTS defense/aerospace markets.



 **Diversified
Technology®**
An Ergon Co.

www.dtims.com

1.800.443.2667

SPECIFICATIONS

CPU / Cache

- Intel Pentium M processor with max speeds of 2.0GHz and up to 2MB L2 cache
- Primary 32KB Instruction Cache and 32KB write-back data cache
- Intel E7501 chipset

Bus Interface

- 400MHz Front Side Bus
- 32-bit/33MHz or 64-bit/66MHz PCI and 64-bit/66 to 133MHz PCI-X Busses;
- 16-bit/8.33MHz ISA Bus
- High drive ISA buffers, up to 20 slots

Memory

- Two 184-pin latching DIMM sockets
- Up to 4GB using 64/128/256/512 x 72 with ECC DDR200 (2.5V)

Data Path

- 64-bit/400MHz on CPU and memory bus
- 32-bit/33MHz on onboard PCI bus
- 64-bit/66,100,133MHz onboard PCI-X bus
- 32-bit/33MHz or 64-bit/66MHz off-board PCI bus
- 16-bit on off-board ISA bus
- 1GB/s Hub Link 2.0

Flash Memory

- 8Mb (1MB) Flash ROM for BIOS field upgrade

I/O

- USB Ports: two, 1.1 compliant (via 4-pin headers)
- PS/2 mouse and keyboard (10-pin shrouded IDC header, 6-pin on faceplate)
- Serial Ports: two RS-232 (16C550) with 16 byte FIFO as COM1-2 with BIOS selectable IRQs and addressing, (two male 10-pin shrouded headers)
- Parallel Port: one bi-directional with all IEEE 1284 protocols supported and BIOS selectable IRQs and addressing, (male 26-pin shrouded header)
- Floppy Disk: support for two drives (360 KB to 2.88 MB), (male 34-pin shrouded header)
- EIDE: PCI Ultra ATA/100, support for two drives (master/slave configuration); PIO Mode 4, Bus Master IDE or DMA mode transfers up to 100MB/s, (male 40-pin shrouded headers)
- Gigabit Ethernet: 10/100/1000Base-TX (Intel 82546EB), (shielded RJ-45 on face plate with link and activity LEDs)
- Hub Link Expansion (80-pin socket): opt. Ultra320 SCSI LVD/SE card

Video

- PCI SVGA concurrent, independent CRT and LVDS flat panel controller with 8MB SDRAM memory (SM Lynx3DM+) (female DB-15 on face plate, 20-pin shrouded header)

Video (cont'd)

- Supports displays with resolution up to 800 x 600, 16.8M colors; 1024 x 768, 64K colors; or ECC 1280 x 1024, 256 colors, non-interlaced

Clock / Calendar

- Real-time clock with 256 byte battery backup CMOS RAM

Misc.

- Speaker (4-pin), reset (2-pin), HD activity LED (2-pin),
- Onboard Wake-on-LAN (S1)
- 12V CPU power (4-pin); CPU fan power (3-pin)
- Intruder alert (2-pin)

BIOS

- PCI 2.2 compliant field upgradeable AMI BIOS
- Boot from LAN (PXE 2.0)
- Supports memory hole at 15-16MB; PnP V1.0a compatible
- Setup console redirection to serial port (VT100 or ANSI mode) with CMOS setup access
- Onboard video, Ethernet enable/disable
- Diskless, keyboardless, and videoless operation extensions; system, video and third party option card ROM shadowing
- Advanced security features for floppy and HDD; S.M.A.R.T.; SMBIOS V2.3.1
- Advanced Intel SpeedStep technology (Auto Halt, Stop-Grant, Deep Sleep & Deeper Sleep), ACPI Rev 1.0b & 2.0 compliant
- Custom graphical boot, multi boot

Supervisory

- Three-stage programmable watchdog timer drives interrupt on 1st stage, NMI on 2nd stage, system reset on 3rd stage
- Hardware system monitor (voltages, CPU temperature, fan speed)

OS/Driver Compatibility

- Windows®98/ME/2000/XP/NT; Monta Vista Hard Hat and Red Hat Linux®

Mechanical

- 13.30 in. x 4.80 in. x 1.48 in. at CPU / fan (338 mm x 122 mm x 38 mm)
- Conforms to IEEE P996 PC/AT bus, PCI Rev. 2.2, PICMG 1.0 Rev. 2.0, & PCI-SIG PCI-X Addendum to the PCI Local Bus Specification, Rev. 1.0b standards

Power Requirements

Max Power Dissipation	76W
ICC typ.*	+5V 8A
	+12V 3A
	-5V 0mA
	-12V 0mA

*Measured with 1.6GHz CPU, 4GB DDR & HDD

Environmental

Operating

- Temperature: 0° to 50°C / 32° to 122°F
- Humidity (RNC): 5 to 95% @ 40°C / 104°F
- Altitude: 3048m / 10,000ft @ 35°C / 94°F
- Vibration: 1G 5-500Hz

Storage and Transit (in approved packaging)

- Temperature: -40° to 70°C / -40° to 158°F
- Humidity (RNC): 5 to 95% @ 40°C / 104°F
- Altitude: 15,240m / 50,000ft
- Shock: 30" free fall
- Vibration: 0.5G 5-50Hz, 3G 50-500Hz

Reliability

- MTBF: >170,000 hours @ 20°C / 68°F (Telecordia)
- 2 year limited warranty
- USB and keyboard/mouse voltage protected by self-resetting fuses

Regulatory Compliance

- Safety: UL/cUL 60950-1:2003, EN/IEC 60950-1:2001
- EMC Class A: FCC 47 CFR part 15-B, CISPR22:1997/EN55022:1998, EN55024:1998

Ordering Information

LBC-9116/1100 *

PCI/ISA SBC with 1.1GHz/400MHz Pentium M processor and 1MB L2 cache

LBC-9116/1600 *

PCI/ISA SBC with 1.6GHz/400MHz Pentium M processor and 1MB L2 cache

LBC-9116/16003 *

PCI/ISA SBC with 1.6GHz/400MHz Pentium M processor 735 and 2MB L2 cache

LBC-9116/1800 *

PCI/ISA SBC with 1.8GHz/400MHz Pentium M processor 745 and 2MB L2 cache

LBC-9116/2000

PCI/ISA SBC with 2.0GHz/400MHz Pentium M processor 755 and 2MB L2 cache

* long life-cycle support

Options

Low Profile DDR200 DIMMs
SDC-320 SCSI daughter card
Cables



All products are shipped FOB factory (MS). Specifications subject to change without notice. Trademarks are the property of their respective owners.

(C) Copyright 2004 by Diversified Technology, Inc. All rights reserved.