

1U Type Industrial Power Supply

EFAP-351 / 401

EPS1U

350/400 watts Output Power

Dual +12V Output Rails

EPS1U Application

Meet 1U Rack Mount System



Dimensions: 100(W) x 40(H) x 250(D) mm

Features:

- ⦿ Universal Power Input
- ⦿ Active power Factor Correction
- ⦿ Dual +12V Output Rails
- ⦿ Dual Processors Application
- ⦿ Remote DC Sense on +5V and +3.3V
- ⦿ Short Circuit Protection
- ⦿ Over Current Protection
- ⦿ Over Voltage Protection
- ⦿ Over Power Protection
- ⦿ MTBF >100,000 Hours

General Specifications:

- ⦿ Input Range: 100 to 240 VAC, +/-10%
- ⦿ Power Factor: 0.95 minimum
- ⦿ Efficiency: 70% minimum, at full load
- ⦿ Hold up Time: 20mS minimum, at full load
- ⦿ PSON (Remote ON/OFF): TTL compatible signal
- ⦿ Power Good: 100 to 500 ms, TTL compatible signal
- ⦿ Cooling Fan: 40x40x28 mm (SANYO)
- ⦿ Operating Temperature: 0 to 50 degree
- ⦿ Operating Humidity: 20 to 90 %

Agency Requirements:

- ⦿ Harmonic: Meet EN61000-3-2 standards
- ⦿ EMI/RFI: CE, FCC class B and CISPR class B
- ⦿ Safety: UL, cUL, CB, TUV

Electrical Specifications:

Regulation, Ripple & Noise:

Output	+5V	+3.3V	+12V	-5V	-12V	5Vsb
Load Regulation	± 5%	± 3%	± 5%	± 5%	± 5%	± 5%
Cross Regulation	± 5%	± 3%	± 5%	± 5%	± 5%	± 5%
Line Regulation	± 1%	± 1%	± 1%	± 1%	± 1%	± 1%
Ripple & Noise	50mV	50mV	120mV	100mV	120mV	50mV

Input and Output Ratings:

Model No	Input				Load	Output						
	Voltage	Frequency	Current	Watt		+5V	+3.3V	+12V1	+12V2	-5V	-12V	5Vsb
EFAP-351	90 – 264 VAC	47-63 Hz	6A max	350W	Max Load	30A	30A	18A	18A	0.3A	0.8A	2A
					Min Load	0.5A	0A	0.5A	0.5A	0A	0A	0A
EFAP-401	90 – 264 VAC	47-63 Hz	7A max	400W	Max Load	30A	30A	18A	18A	0.3A	0.8A	2A
					Min Load	0.5A	0A	1A	1A	0A	0A	0A

Note: 1. The +12V1 & +12V2 combine output currents maximum are 25A for EFAP-351 and 30A for EFAP-401.

2. The +5 & +3.3 Volt combine total output shall not exceed 200W for EFAP-351 and 220W for EFAP-401.


3. The +5, +3.3 and +12 Volt combine total output shall not exceed 330W for EFRP-351 and 380W for EFRP-401.

4: Noise bandwidth is from DC to 20 MHz.

1U Type Industrial Power Supply

EFAP-351 / 401

Dimensions (Unit: mm):

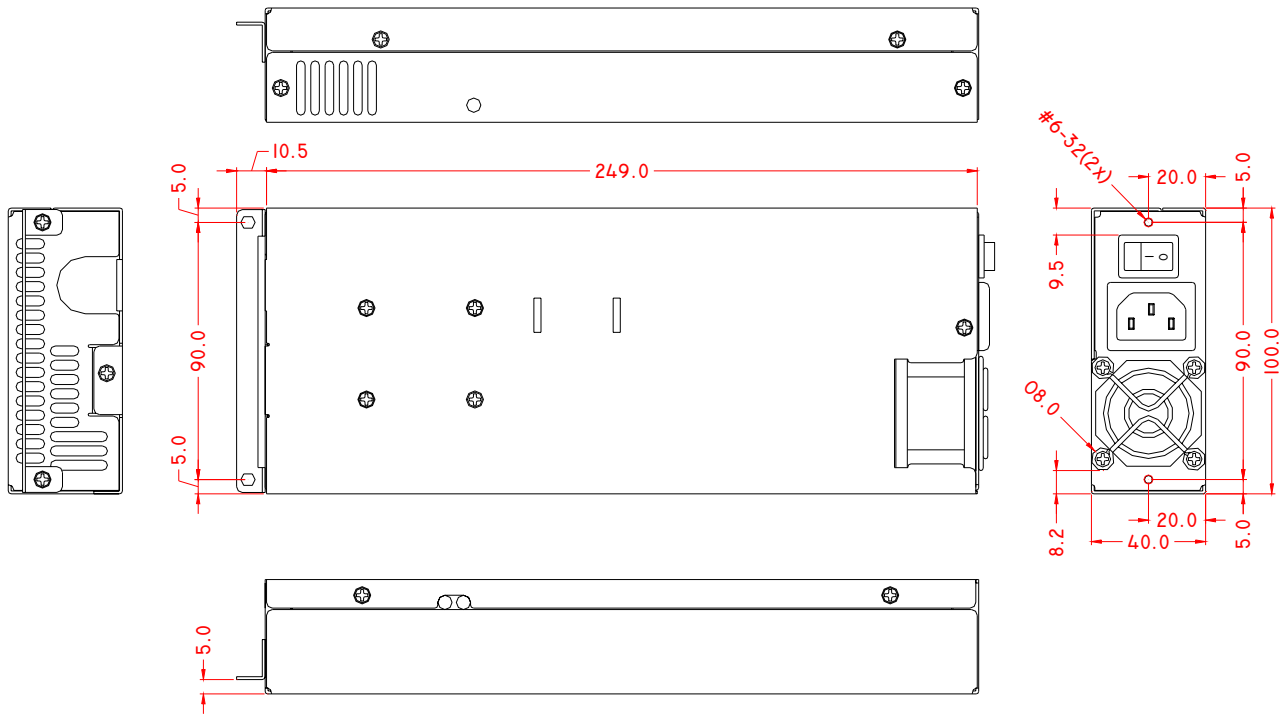

Rev: 1.3, May 29, 2003