


PCM-5895 Rev. B

■ Compact Board with AMD Geode™ LX Series Processor

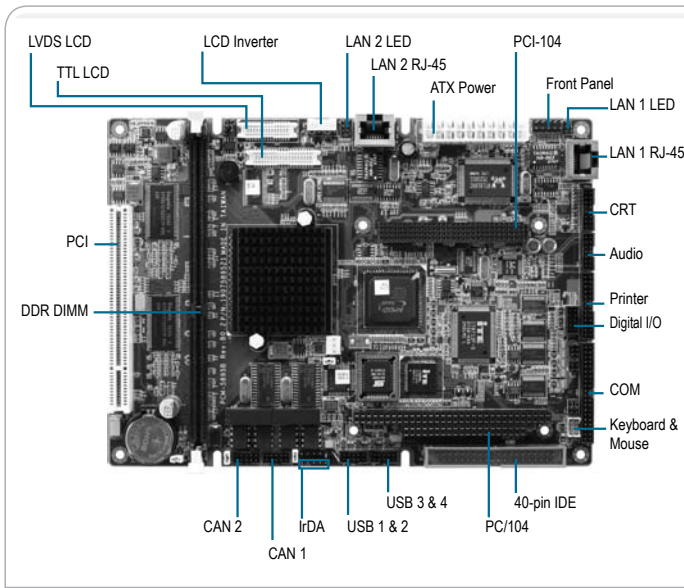

Features

- AMD Geode™ LX 800 Processor
- AMD Geode™ LX + CS5536
- DIMM DDR 333/400 Memory Max. 1 GB or Onboard DDR333 Memory 256 MB
- 10/100Base-TX Ethernet x 2
- Up to 24-bit LVDS/TTL LCD, CRT
- AC97 2CH Audio
- Type II CompactFlash™ x 1, EIDE x 1
- USB x 4, COM x 4, 8-bit Digital I/O x 1, Parallel x 1
- PCI x 1, PC/104+ (Optional)
- +5V Only Operation/ AT/ ATX
- CAN Bus x 2 (Optional)



Specifications

System	
Form Factor	5.25"
Processor	Onboard AMD Geode™ LX 800 processor 500 MHz
System Memory	184-pin DDR DIMM x 1, Max 1 GB (DDR333/400), or onboard memory DDR333 256 MB
Chipset	AMD Geode™ LX + CS5536
I/O Chipset	ITE IT8712 + IT8888G
Ethernet	Realtek RTL8100C, 10/100Base-TX, RJ-45 x 2
BIOS	Award 1 MB Flash ROM
Wake On LAN	Yes
Watchdog Timer	Generates a time-out system reset
H/W Status Monitoring	Supports power supply voltages, temperature monitoring
Expansion Interface	PCI x 1, PC/104+ (PC/104 + PCI-104)
Battery	Lithium battery
Power Requirement	+5V/ AT/ ATX
Power Consumption (Typical)	AMD Geode™ LX 800 (500 MHz) DDR400 256MB 2.33A@+5V
Board Size	8" (L) x 5.75" (W) (203mm x 146mm)
Gross Weight	1.2lb (0.5KG)
Operating Temperature	32°F ~ 140°F (0°C ~ 60°C)
Storage Temperature	-40°F ~ 176°F (-40°C ~ 80°C)
Operating Humidity	0% ~ 90% relative humidity, non-condensing
MTBF (Hours)	80,000
Display	
Supports CRT/ LCD and CRT/ TV simultaneous display	
Chipset	AMD Geode™
Memory	Shared system memory up to 254 MB
Resolutions	Up to 1920 x 1440 @ 24bpp for CRT Up to 1600 x 1200 @ 24bpp for LCD
LCD Interface	Up to 24-bit LVDS, TTL, CRT
I/O	
Storage	EIDE x 1 (UDMA 100 for one device), Type II CompactFlash™ x 1
Serial Port	RS-232 x 3, RS-232/422/485 x 1
Parallel Port	SPP/ EPP/ ECP mode
USB	USB2.0 x 4
PS/2 Port	Keyboard x 1, Mouse x 1
Digital I/O	Supports 8-bit (Programmable)
IrDA	One IrDA Tx/Rx header
Audio	Mic-in, Line-in, Line-out, CD-in
CAN Bus	Supports two ports

Packing List

- 9657666000
Jumper Cap
- Quick Installation Guide
- Utility CD
- PCM-5895 Rev.B

Ordering Information

- **TF-PCM-5895-B10**
5.25" Board, LX 800 500 MHz, 18-bit LVDS/TTL, DDR, 2LAN, 4COM, 6USB, CompactFlash™, Rev.B1.0
- **TF-PCM-5895-B10-01**
5.25" Board, LX 800 500 MHz, 24-bit LVDS/TTL, DDR, 2LAN, 4COM, 6USB, CompactFlash™, Rev.B1.0
- **TF-PCM-5895-B10-02**
5.25" Board, LX 800 500 MHz, 18-bit LVDS/TTL, DDR, 256 MB Onboard, 2LAN, 4COM, 6USB, CompactFlash™, PC/104+, 2CAN, Rev.B1.0
- **TF-PCM-5895-B10-03**
5.25" Board, LX 800 500 MHz, 24-bit LVDS/TTL, DDR, 256 MB Onboard, 2LAN, 4COM, 6USB, CompactFlash™, PC/104+, 2CAN, Rev.B1.0

Optional Accessories

- **TF-PER-K004**
Cable Kit for PCM-5895 Rev.B
- **TF-PCM-5600**
PC/104 56K Fax/Modem Module
- **TF-PCM-FA00-A10**
PC/104 Board Plus to Mini-PCI Module Converter