


**VTC4424** **12-Slot PICMG PCI/ISA Backplane**

- PICMG Standard
- One PICMG CPU slot (Two locations for option)
- Seven ISA bus slots
- Four PCI bus slots
- Two 5-pin header for keyboard connector cable
- One AT keyboard connector
- 12-pin standard PC power connector (P8 & P9) and ATX power connector
- Five position screw mount terminal block power connectors
- Power LED for +5V, -5V, +12V, -12V and +3.3V
- Dimension (LxW): 257mm x 277mm (10 1/8" x 10 3/4")

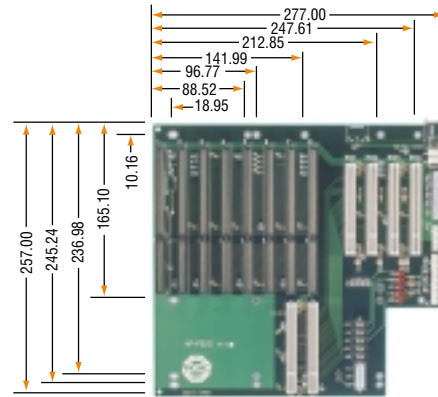

**VTC269** **14-Slot PICMG PCI/ISA Backplane with ATX function**

- PICMG Standard
- One PICMG CPU slot (Two locations for option)
- Nine ISA bus slots
- Four PCI bus slots
- Three 5-pin header for keyboard connector cable
- One AT keyboard connector
- One ATX 5VSB connector (GND, 5V standby, GND, PSON)
- 12-pin standard PC power connector (P8 & P9) and ATX power connector
- Five position screw mount terminal block power connectors
- Power LED for +5V, -5V, +12V, -12V and +3.3V
- Dimension (LxW): 260mm x 314mm (10 1/4" x 12 1/2")

