

ACE-4535AP

360 W 2U ATX Power Supply


360W



PFC



Dimensions

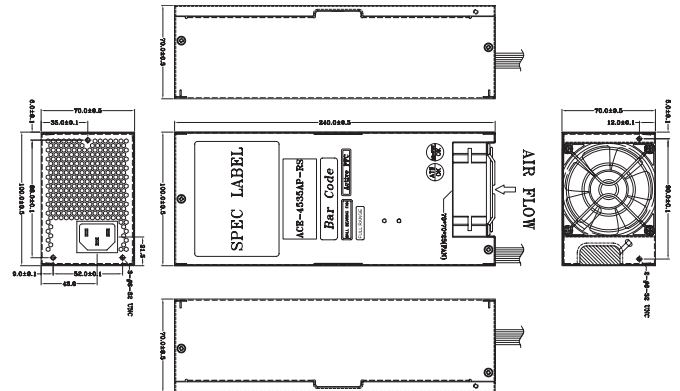

Input Type	90~264 VAC Full Range, 47~63 Hz					
Overvoltage	+3.3 V 5 A (0.3 A min.)	+5 V 8 A (1 A min.)	+12 V 12 A (0.5 A min.)	+24 V 6 A (0 A min.)	-12 V 0.5 A (0 A min.)	-5 Vsb 2 A (0 A min.)
Efficiency	75 %					
Temperature	0 °C~ 50 °C (Operating), -20 °C~ 80 °C(Storage)					
MTBF(hrs)	100,000					
Output Connector	21 x 20+4-pin ATX 1 x 4-pin 12 V CPU 3 x HDD 2 x SATA 1 x 5 V (P10)					
Dimensions	240 x 100 x 70 (mm)					

Ordering Information

Part No.	Description
ACE-4535AP -RS	360W 2U ATX Power Supply with active PFC

ACE-4530AP

300 W 2U ATX Power Supply

300W


PFC



Best solution for the RACK-1350GATX 2.0 standard w/ new 20+4 Meets ATX revision 2.0, with 20+4-pin ATX power and SATA connector



Dimensions

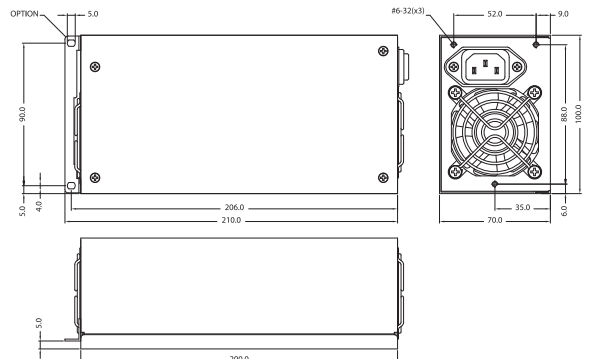

Specifications

Input Type	90 ~ 264 VAC Full Range					
Output	+5 V 35 A	+12 V 16 A	-12 V 1 A	-5 V 0.5 A	+3.3 V 20 A	+5 Vsb 2 A
Efficiency	63 %					
Temperature	Operating : 0 °C ~ 50 °C Storage : -20 °C ~ 80 °C					
Output Connector	1 x 20+4-pin ATX 1 x 4-pin 12 V CPU 4 x HDD 2 x FDD 2 x SATA 1 x 5 V (P10)					
Dimensions	200 x 100 x 70 (mm)					

Ordering Information

Part No.	Description
ACE-4530AP-RS	300 2U AC-DC ATX Power Supply, with PFC